DKM MOTOREN
TEIL 1

Ott Antriebstechnik
Standardisierte Individualität

HOCHQUALITATIVE AC- UND DC-MOTOREN

MIT STIRNRAD-, SCHNECKEN- ODER HELICROSSGETRIEBE

Ott GmbH & Co. KG
info@ott-antriebe.de • www.ott-antriebe.de

DKM
motor & gearbox

DKM

The power to move the world,
there is DKM at the center.
DKM

Global Network

Global Headquarters
Incheon, KOREA

DKM China
Shanghai, CHINA

DKM Malaysia
Johor Bahru, Malaysia

German Partner
OTT GmbH Deisslingen, Germany

Headquarters
292, Yeomjeon-ro, Michuhol-gu, Incheon,
Korea, 22117
Tel: 032 574 7788 Fax: 032 578 7787
www.dkmmotor.com | info@dkmmotor.com

DKM China
No. 555 Lianming Road, Qibao Toun Minhang
Shanghai, China 201101
Tel: +86 21 6461 9665 Fax: +86 21 6459 5115
www.dkmmotor.com | dh.kim@dkmmotor.com

DKM Malaysia
No. 27, Jalan Selatan 3/4, Taman Impian Emas, 81300
Skudai, Johor Bahru, Johor, Malaysia
Tel: +607 522 4488
Fax: +607 522 4848
www.servo-matic.com.my | raymondlee@servo-matic.com.my

German Partner
Ott GmbH & Co. KG Antriebstechnik Electronic
Baarstrasse 3, 78652 Deisslingen, Germany
Tel: +49 7420 9399-0
Fax: +49 7420 9399-25
www.ott-antriebe.de | Info@ott-antriebe.de

HISTORY

2020 Newly launched 'DSY SERIES'

2019 Newly launched 'HELICROSS GEARBOX' (patent)

2018 Relocation and extension of global headquarters

Acquired 'EMCD, LVD , KC Mark (FX3000)'

Acquired 'ISO9001 / 14001 Certification'

Acquired 'RoHS, Reach Certification'

2015 Acquired 'TUV certificate' (Europe UL1004-1)

Acquired 'RU Mark'

Newly launched '400W small geared motor' (patent)

Acquired 'CE Mark'

2014 Received 1 Million Dollor Export Tower Award at the

51st 'Trade Day Commemoration Ceremony'

2011 Unveiled a New Coporate Identity

2009 Established 'DKM Europe ' in Germany

2008 Established 'DKM South Asia Pte Ltd.' in Singapore

2005 Established ' DKM Shanghai Co., Ltd.' in Shanghai,China

2002 Acquired ISO 9001:2000

2000 Changed company name to DKM Co ., Ltd ., the holding company

1999 Acquired CE Mark(in some parts of Induction Motor)

Advanced into Europe

1995 Starts export to India, Indonesia and Malaysia

1994 Acquired 'NT -New Technology Mark ' from Korean government

1993 Acquired 'Q Mark' in Small Gearbox division from Korean government

1990 Starts export to overseas markets including China

1987 Developed 'Small Geared Motor' first time in Korea

The father company,

1983 'Daekyung Machinery Co.'

founded (in Guro-gu, Seoul

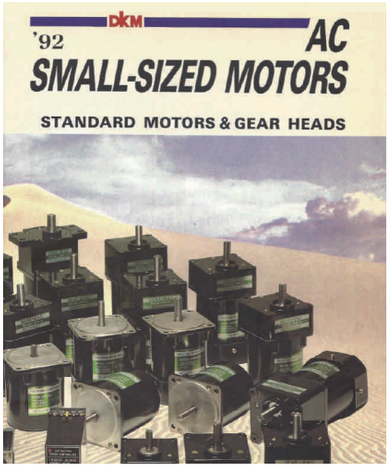

Production

Metal Processing

DKM Motor has a long worth of knowledge in manufacturing metal processing components since its foundation. We are making all metal cutting processes: turning with single or multi-spindle machines, gearing by hobbing machine, heat treatments and hardening processes.






Assembly and Test

By using the precision assembly machines DKM Motor is making assembly of the selected components by the internal quality standard.We are making total 3 times test ; the test of the components before assembly, the test after assembly and the final shipping test after assembly of motor and gearbox.



R&D

The design department of DKM Motor is connected to the development of all products and our R&D team is on standby for comprehensive and fast adaptations to match your specific requirements and specifications.




Laboratories

DKM Motor carries out stress, wear, tear, and life tests with the test machines.
Through this test process in our test laboratory, we can get the permissible torque and other limit values of each product to meet the required demands.




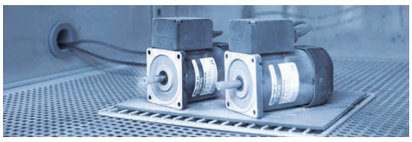

Quality Assurance

We always carry out the reliability test for sampling products from all manufactured products.
By this test we can handle any faulty in advance.



Marketing

DKM Motor is making its efforts to inform the customers of the products by the effective method through various marketing channels. Since its establishment in 1983, we have participated continuously in domestic/overseas industry/machinery exhibitions and introduced our products through dealer conferences/technical seminars, and received the requirements from agencies and users to reflect in the production of the products.
Besides, through the regular distribution of press releases, sending newsletters, etc. we are delivering the news and information on new products of DKM Motor quickly.

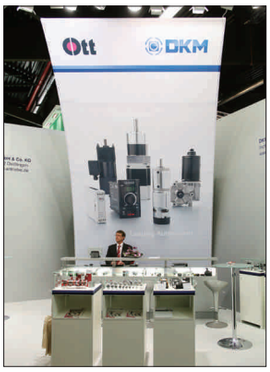

Partners Conferences

DKM Motor holds conferences with our partners regularly all over the world.
This conferences enable DKM Motor and the partner companies to communicate and exchange the news each other.

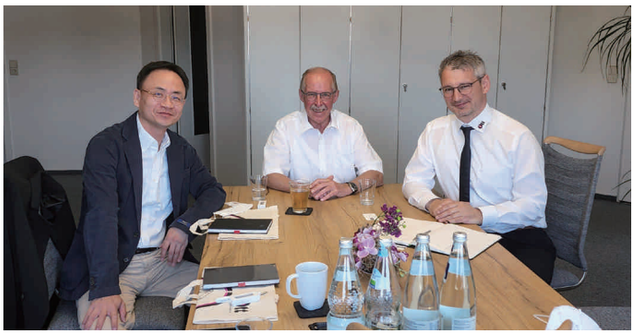

Technical Seminar

DKM Products Overview

AC MOTORS

Induction Motor

For Continuous Operation
- Appropriate for one way continuous running
- It stops in 2sec after the machine is switched off (Overrun : 30~40times)
- Possible for reverse rotation

Lead Wire Type

Terminal Box Type

2 Pole Motor

For High Speed Rotation
- 3,600 r/m (60Hz)
- 3,000 r/m (50Hz)
- Used without a gearbox
- Possible for reverse rotation

Lead Wire Type

Terminal Box Type

Reversible Motor

For Bi-Directional Operation
- Built-in simple brake mechanism makes overrun small
- Appropriate for the machine which needs to change the direction frequently
- Fixed speed operation + simple position control (Position control level : ★☆☆☆☆)
- It stops in 0.5 sec after the machine is switched off(Overrun : 5~6 times)
- Possible for reverse rotation

Lead Wire Type

Terminal Box Type

Brake Motor

For maintaining load
- Induction Motor with a brake to stop and hold a load
- Fixed speed operation + simple position control (Position control level : ★★☆☆☆)
- It stops in 0.2 sec after the machine is switched off (Overrun:2~3times)
- Possible for reverse rotation

Clutch & Brake Motor

For Frequent Start/Stop Operation
- Structure with an internal clutch and brake mechanism
- Fixed speed operation + simple position control (Position control level : ★★★☆☆)
- It stops in 0.1 sec after the machine is switched off(Overrun : 1time)
- Used always with a gearbox
- Possible for reverse rotation

Torque Motor

For Torque Adjustment with ease
- Suitable for Tension Control or Winding and Unwinding Applications
- Motor Torque can be adjusted with ease by using a torque controller
- Possible for reverse rotation
- Torque controller : DX3000, FX3000

FX3000
- Including control knob (Digital display)
- Built-in Capacitor
- Speed or Torque control

DX3000
- RS-485 communication control
- PLC I/O control
- Speed and Torque Control
- DIN Rail Type

Speed Control System

- Speed Control Induction Motor
- Speed Control Reversible Motor
- Speed Control Brake Motor
- Speed Control Clutch&Brake Motor

- Speed control motor allows you to set and adjust the speed of the motor easily by using a speed controller
- Speed Controller: FX3000, DX3000, DSA, DSKM

FX3000
- Including control knob (Digital display)
- Built-in Capacitor
- Speed or Torque control

DX3000
- RS-485 communication system
- PLC I/O control
- Speed or Torque Control
- DIN Rail Type

DSA
- Including control knob (Analog type)
- Unit Type (Connecting to a motor using a connector)
- Capacitor built-in

DSKM
- Including control knob
- Possible to be used with an external controller
- Socket type (wiring a motor to a socket)

DC MOTORS

DC Motor

- Big starting torque and high efficiency
- Easy to control the speed and reverse the direction
- Superiority in the responsiveness of start and stop
- Possible to attach a parallel and worm gearbox

Speed Controller DSD-90

- Applicable to DC 90V motor
- Front panel potentiometer, Unit type

Gearboxes

Parallel Gearbox

- General Box Type, Powerful Box / Flange Type, High Powerful Box / Flange Type
- Frame Size: 60/70/80/90/104mm
- Gear Ratio: 2 : 1~360 : 1

Worm Gearbox

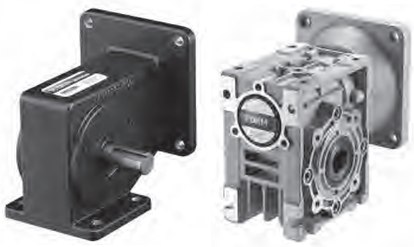

- Maximum use of space
- Worm Solid Type Gearbox
  Frame Size: 80/90mm, Gear Ratio: 10 : 1~60 : 1
- Worm Hollow Type Gearbox
  Frame Size: 90mm/104mm, Gear Ratio: 5 : 1~100 : 1

Inter-decimal Gearbox

- In case of requiring high gear ratio that cannot be generated by single gearbox
- Frame Size: 80/90mm
- Gear Ratio: 10 : 1

Helicross Gearbox

- Concentric and hollow structure right angle gearbox
- Frame Size: 90/104mm
- Gear Ratio: 15:1 ~ 240:1

DSY Series

- Compact Size
- Design optimized for helical gear
- Non-separable geared motor
- Gea Ratio : 7.5:1 ~ 60:1

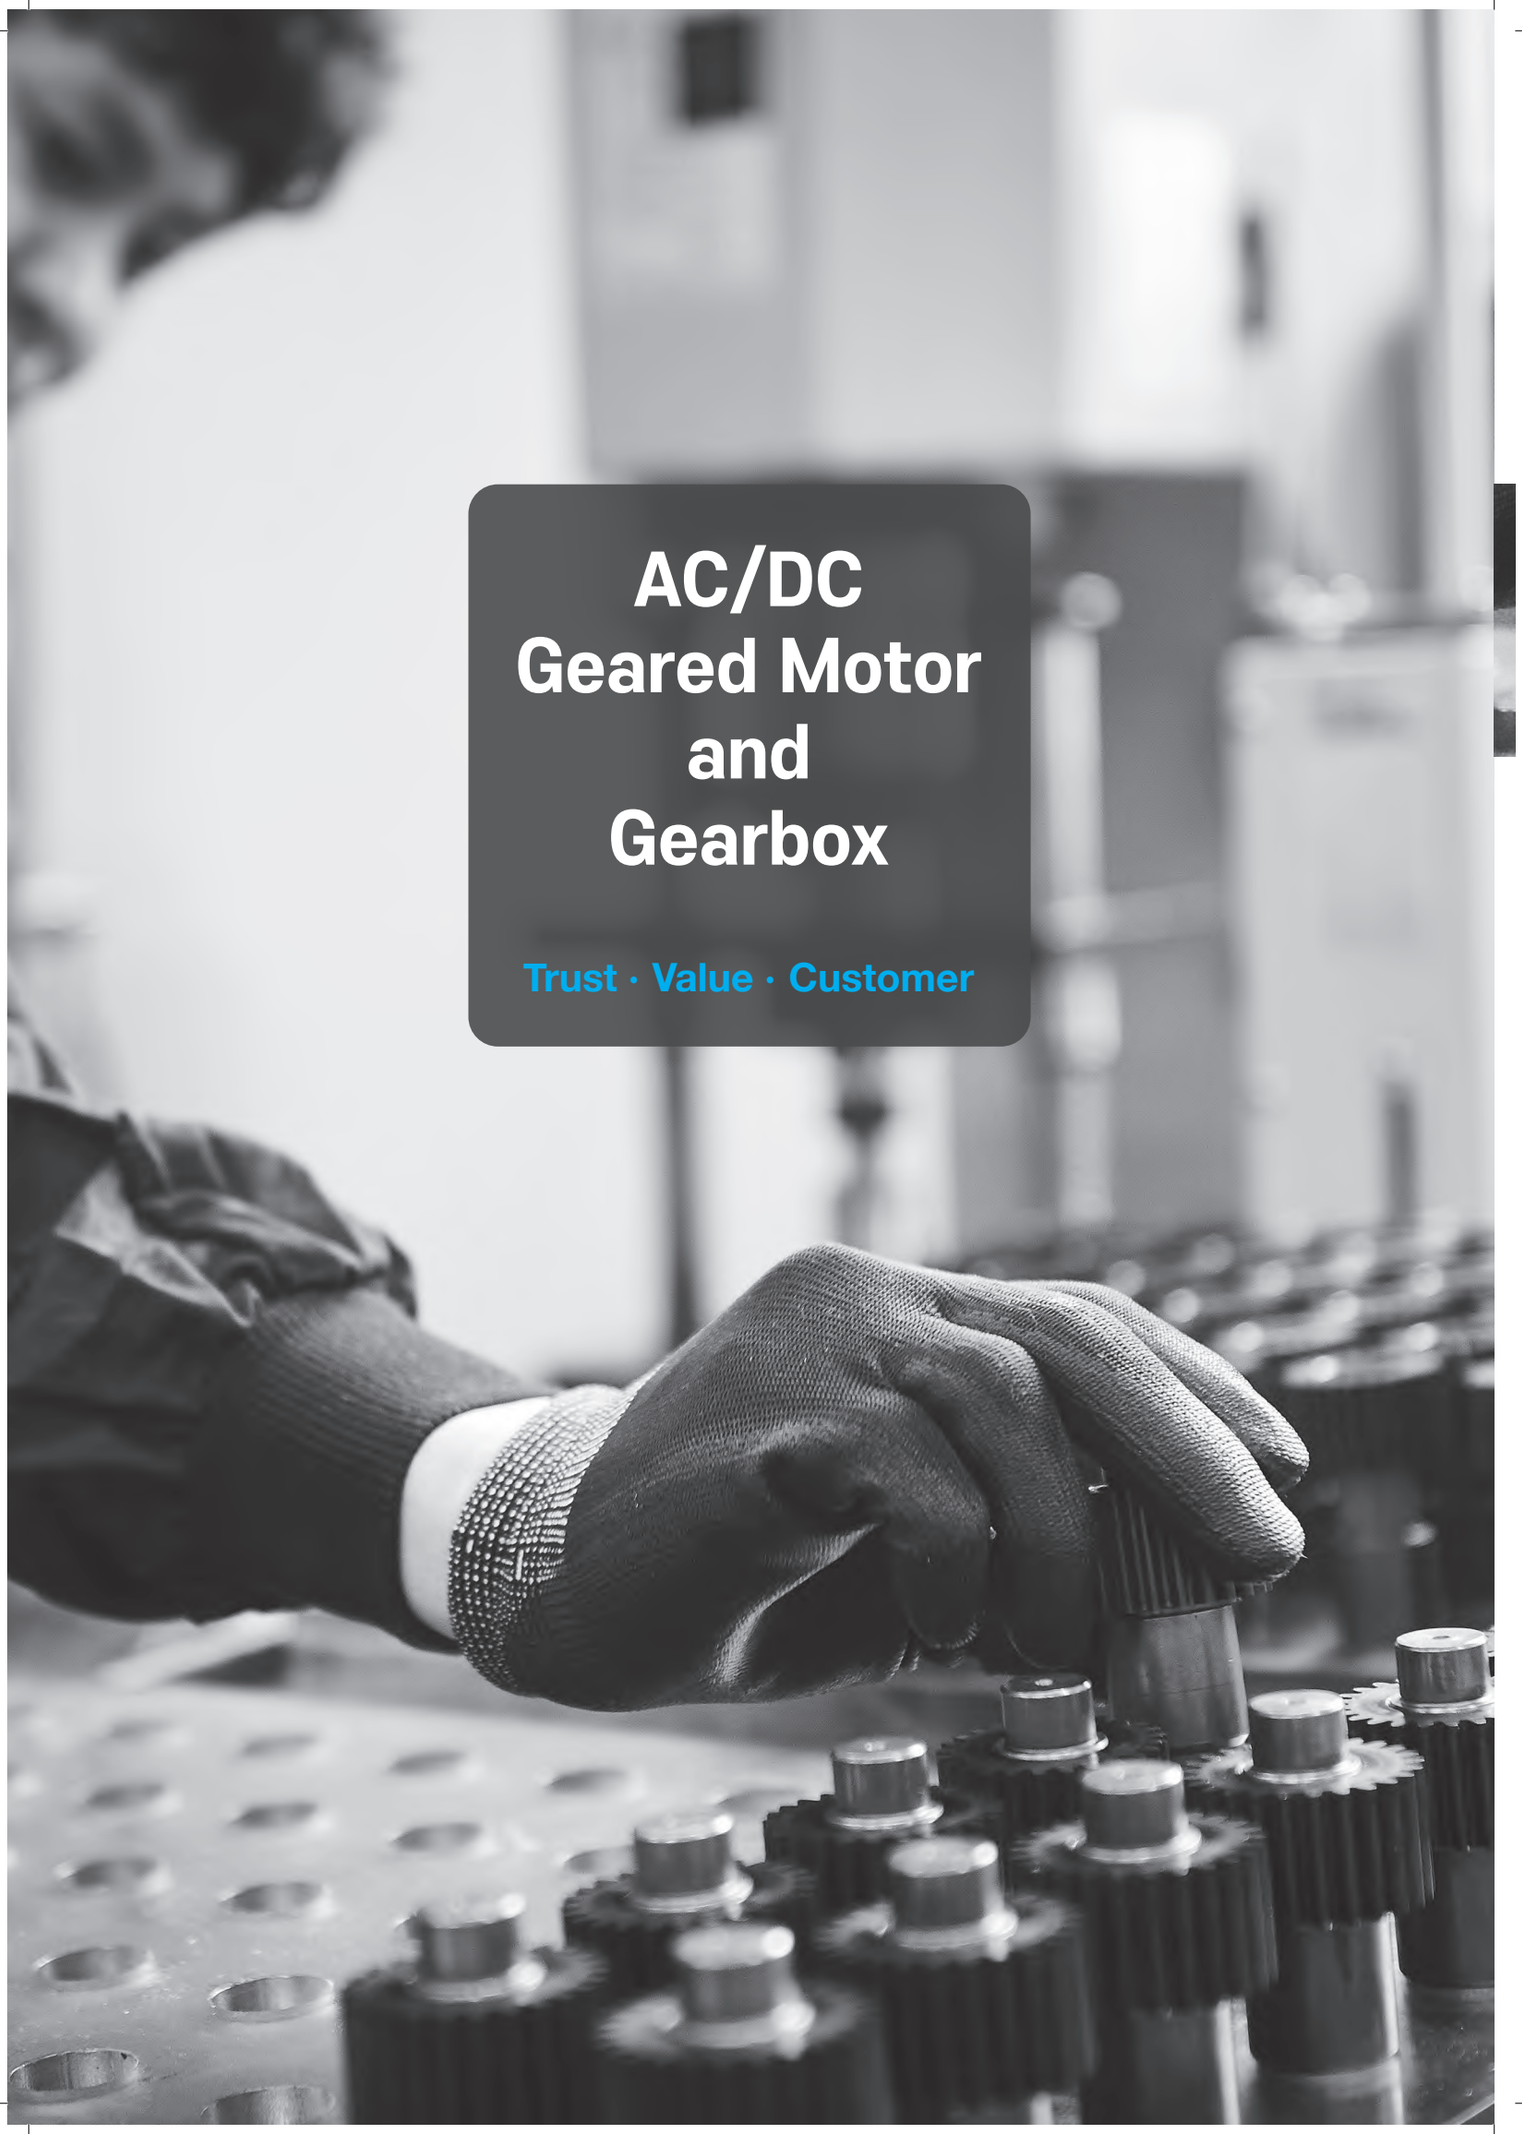

AC/DC Geared Motor and Gearbox

Trust · Value · Customer

Contents

A Information

A-01 Product Coding System
A-04 Products Lineup
A-11 Combination table
A-15 General Information
A-19 Terminology
A-22 Caution for Use

B AC Motors

B-01 Technical Data of AC Motor
B-06 Induction Motor
B-58 2 Pole Motor
B-76 Reversible Motor
B-112 Brake Motor
B-162 Clutch & Brake Motor
B-178 Torque Motor
B-206 Speed Control System
- **B-209** Speed Controller FX3000
- **B-213** Speed Controller DX3000
- **B-217** Speed Controller DSA
- **B-219** Speed Controller DSKM
- **B-224** Speed Control Induction Motor
- **B-258** Speed Control Reversible Motor
- **B-288** Speed Control Brake Motor
- **B-322** Speed Control Clutch & Brake Motor

B-336 DSY Series

C DC Motors

C-01 Technical Data of DC Motor
C-04 DC Motor
C-20 Speed Controller DSD-90

D Gearboxes

D-01 Technical Data of Gearbox
D-07 Parallel Gearbox
D-13 Right-Angle Gearbox
D-18 Inter-decimal Gearbox

E Options

E-01 Mounting Bracket
E-03 Extension Cable
E-04 Output Flange
E-05 Output Shaft

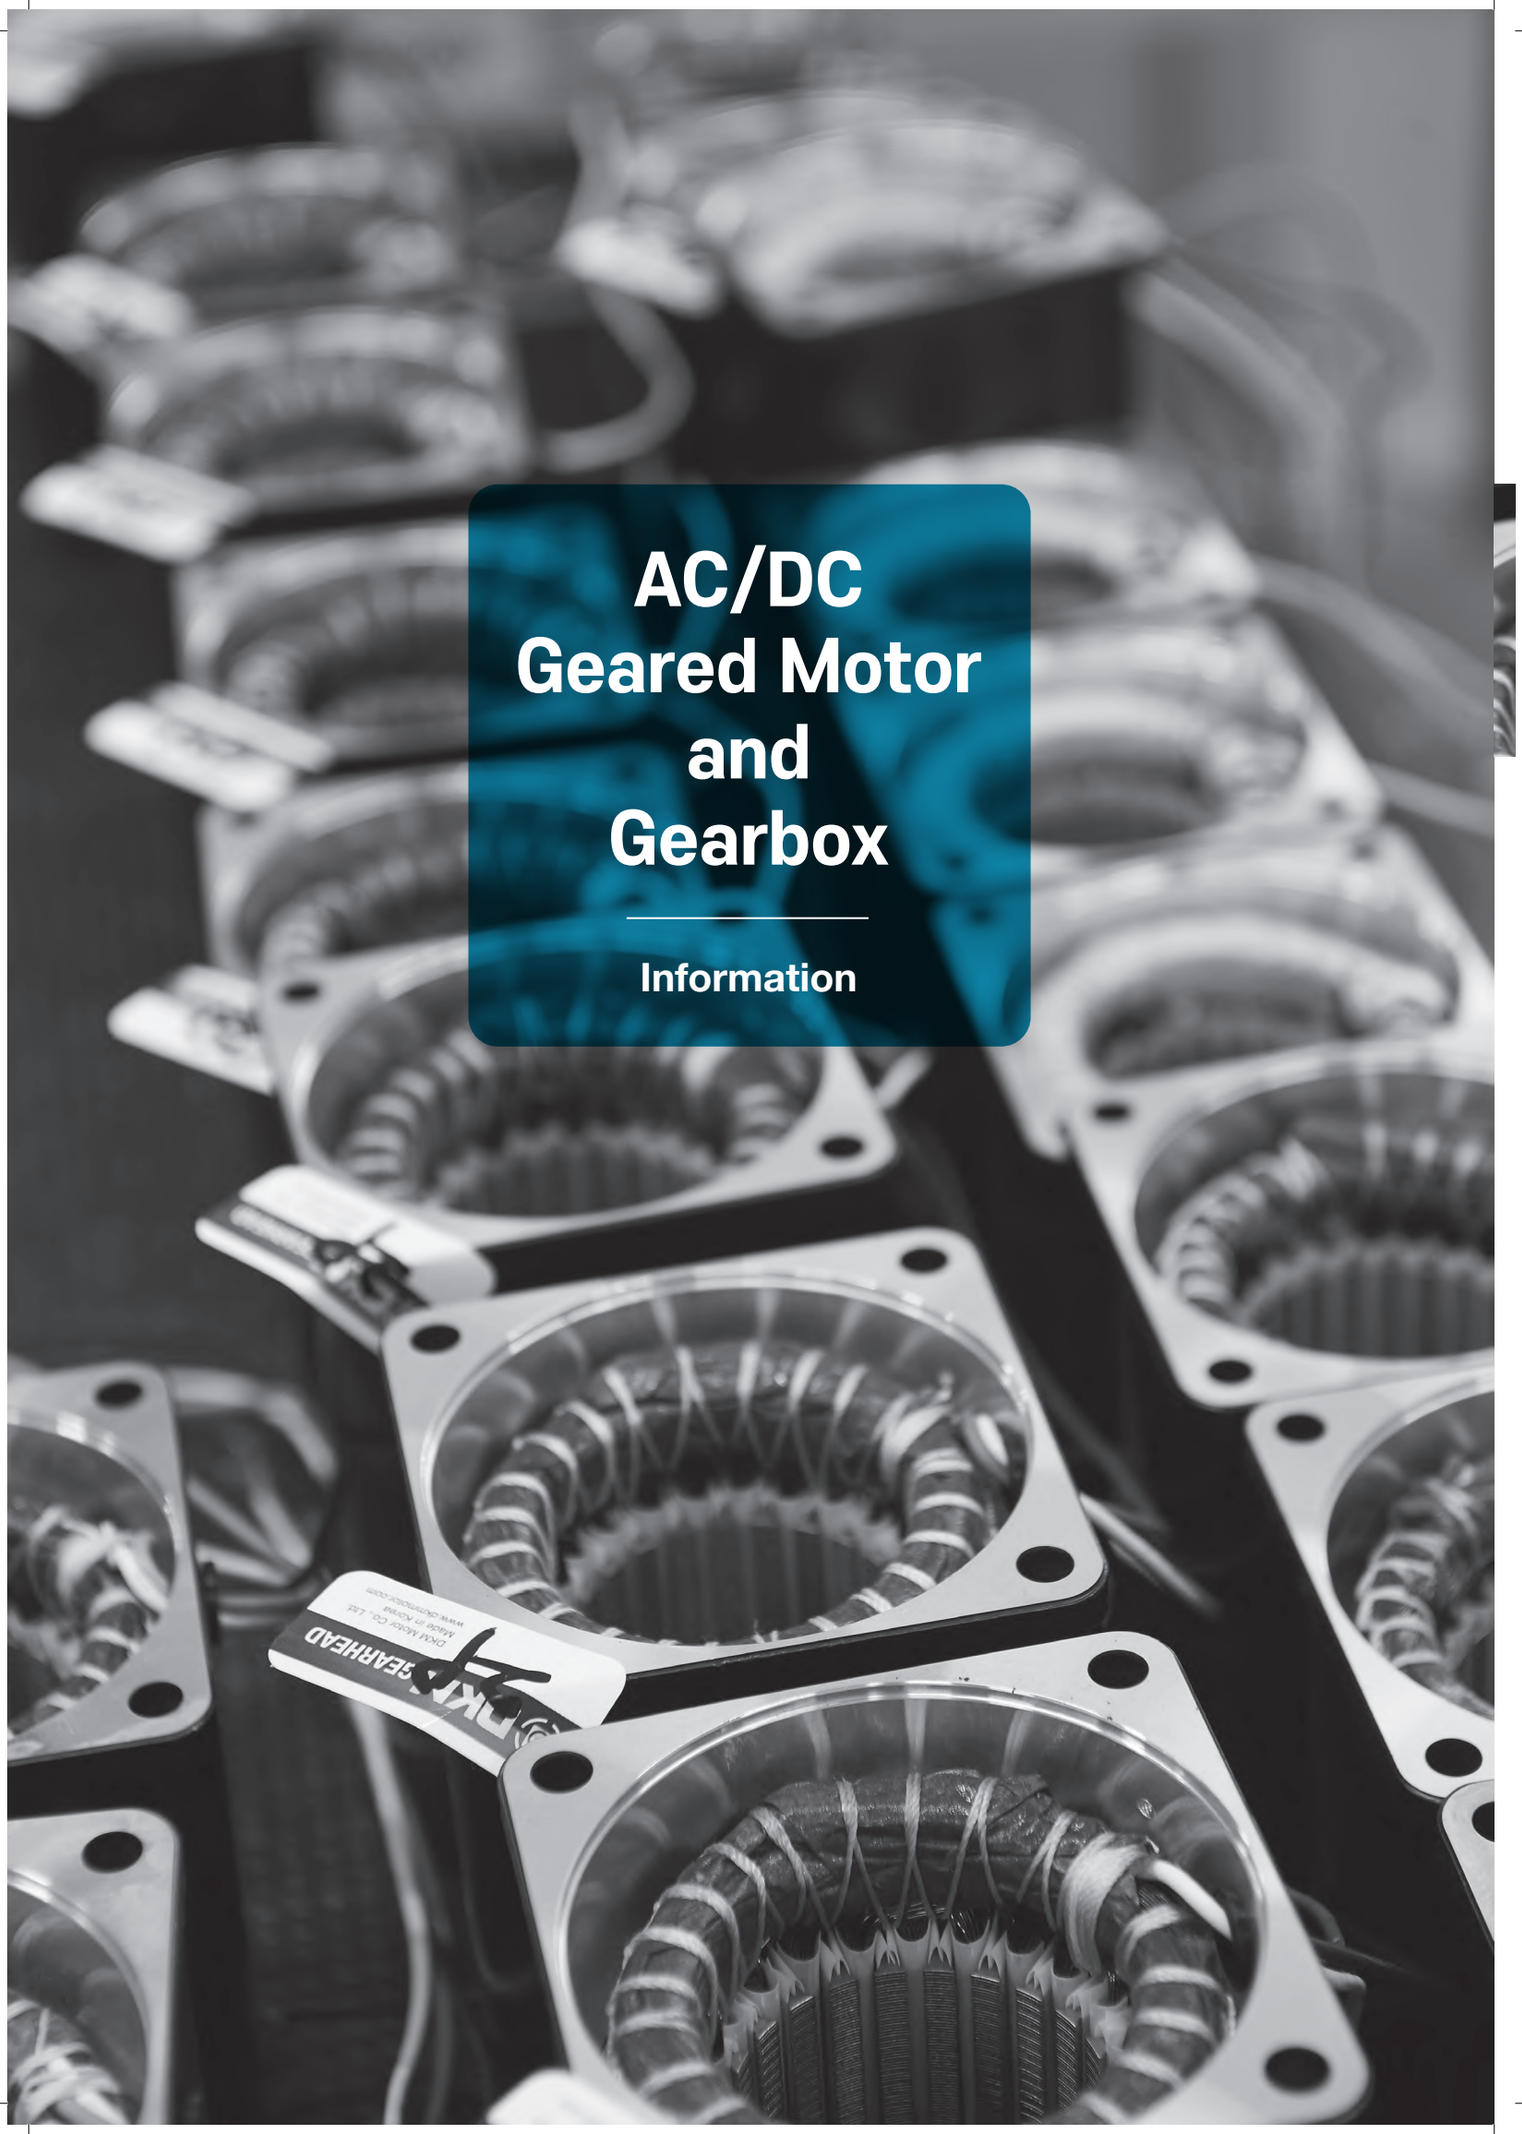

AC/DC Geared Motor and Gearbox

Information

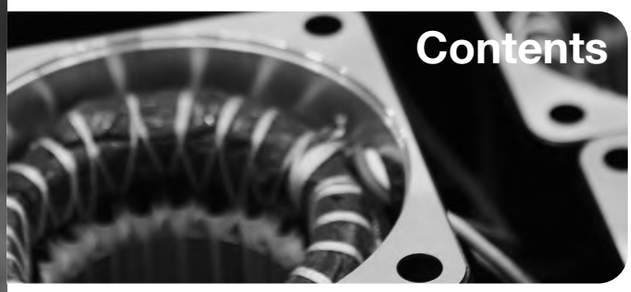

Contents

A Information

A-01 Product Coding System
A-04 Product Lineup
A-09 Combination table
A-13 General Information
A-17 Terminology
A-20 Caution for Use

B AC Motors

B-01 Technical Data of AC Motor
B-06 Induction Motor
B-58 2 Pole Motor
B-76 Reversible Motor
B-112 Brake Motor
B-162 Clutch & Brake Motor
B-178 Torque Motor
B-206 Speed Control System
- B-209 Speed Controller FX3000
- B-213 Speed Controller DX3000
- B-217 Speed Controller DSA
- B-219 Speed Controller DSKM
- B-224 Speed Control Induction Motor
- B-258 Speed Control Reversible Motor
- B-288 Speed Control Brake Motor
- B-322 Speed Control Clutch & Brake Motor

B-336 DSY Series

C DC Motors

C-01 Technical Data of DC Motor
C-04 DC Motor
C-20 Speed Controller DSD-90

D Gearboxes

D-01 Technical Data of Gearbox
D-07 Parallel Gearbox
D-13 Right-Angle Gearbox
D-18 Inter-decimal Gearbox

E Options

E-01 Mounting Bracket
E-03 Extension Cable
E-04 Output Flnage
E-05 Output Shaft

A Information

Product Coding System

AC Motors

Phase & Voltage
- **1** : 1Ø AC 110V 60Hz
- **2** : 1Ø AC 220V 60Hz
- **3** : 3Φ AC 220V–230V 50/60Hz
- **4** : 3Φ AC 380V–400V 50/60Hz
- **5** : 3Φ AC 415V–440V 50/60Hz
- **6** : 3Ø 220/380V 60Hz
- **7** : 3Ø 230/400V 50Hz
- **8** : 3Ø 440V 50Hz/60Hz

Motor
- **I** : Induction Motor
- **R** : Reversible Motor
- **B** : Brake Motor
- **CI** : Clutch & Brake Motor
- **T** : Torque Motor
- **S** : Speed Control Induction Motor
- **SR** : Speed Control Reversible Motor
- **SB** : Speed Control Brake Motor
- **CS** : Speed Control Clutch & Brake Motor

Thermal Protector Attached
- **A** : 1Φ AC 110V 60Hz
- **B** : 1Φ AC 100V 50/60Hz
- **C** : 1Φ AC 200V 50/60Hz
- **D** : 1Φ AC 220V 60Hz
- **E** : 1Φ AC 220V–240V 50Hz
- **G** : 3Φ AC 220V–230V 50/60Hz
- **J** : 3Φ AC 200V–220V 50/60Hz
- **K** : 3Φ AC 380V–400V 50/60Hz
- **L** : 3Φ AC 415V–440V 50/60Hz

Fan Type
- **F** : General Fan (Self-ventilation)
- **F2** : Powerful Fan (Forced ventilation)
  Powerful fan makes powerful cooling performance rotating in high speed regardless of motor shaft speed.
- **No Mark** : No Fans

Connection Type
- **T** : Terminal Box Type
- **No Mark** : Lead Wire Type
- **C** : Connector Type (Speed/Torque Motor)
- **L** : Leadwire Type (Speed/Torque Motor)

Pole
- **A** : 2 Pole
- **No Mark** : 4 Pole

9 I D G A – 90 F P – A T

Brand
- **D** : DKM

Output Shaft Type
- **G** : Gear Type Shaft (Attaching Gearbox)
- **D** : D-Cut Type Shaft
- **K** : Key Type Shaft

Motor Frame Size
- **6** : □60mm sq. (2.36 in.sq.)
- **7** : □70mm sq. (2.76 in.sq.)
- **8** : □80mm sq. (3.15 in.sq.)
- **9** : □90mm sq. (3.54 in.sq.)
- **10** : □104mm sq. (4.09 inch sq.)

Output
- **6** : 6W
- **10** : 10W
- **15** : 15W
- **25** : 25W
- **40** : 40W
- **60** : 60W
- **90** : 90W
- **120** : 120W
- **150** : 150W
- **180** : 180W
- **200** : 200W
- **250** : 250W (E)
- **300** : 300W (D, 7, 8)
- **400** : 400W (6)

Attaching Gearbox
- **G** : General Box Type (6W~40W)
- **P** : Powerful Box/Flange Type (40W~120W)
- **H** : High Powerful Box/Flange Type (60W~200W)
- **U** : Ultra Powerful Box Type (250W~400W)
- **W** : Worm Solid Type (15W~120W)
- **WH** : Worm Hollow Type (030/040) (60W~400W)
- **HC** : Helicross Gearbox (90/104mm) (90W~400W)
- **No Mark** : Without Gearbox

DSY Series

DSY 20 B – 060 N 020 – 3

Gearbox Type
DSY Series

Frame Number
20, 25, 30

Output Shaft Material
B(S45C), S(SUS)

Gear Ratio
7.5, 010, ..., 060

Motor
N (Induction)
B (Brake)

Motor Output
010(0.1kW), 020(0.2kW), 040(0.4kW)

Voltage
- 3(G) : 3Φ AC 220V–230V 50/60Hz
- 4(K) : 3Φ AC 380V–400V 50/60Hz
- 5(L) : 3Φ AC 415V–440V 50/60Hz

DC Motors

9 DC G 12 – 25 – 30

Motor Frame Size
- **6** : □60mm sq. (2.36 in.sq.)
- **8** : □80mm sq. (3.15 in.sq.)
- **9** : □90mm sq. (3.54 in.sq.)

DC
DC MOTOR

Output Shaft Type
- **D** : D-Cut Type Shaft
- **K** : Key Type Shaft
- **G** : Shaft for General Type Gearbox(15W~120W)
- **P** : Shaft for Powerful Type Gearbox(60W~120W)
- **W** : Shaft for Worm Solid Type Gearbox(25W~120W)
- **H** : Shaft for High Powerful Box/Flange Type Gearbox (200W)

DC Voltage
- **12** : DC 12V
- **24** : DC 24V
- **90** : DC 90V

Output
- **15** : 15W
- **25** : 25W
- **40** : 40W
- **60** : 60W
- **90** : 90W
- **120** : 120W
- **200** : 200W

r/min
- **30** : 3000r/min

Parallel Gearbox

Gearbox Frame Size
- **6** : □ 60mm sq. (2.36 in.sq.)
- **7** : □ 70mm sq. (2.76 in.sq.)
- **8** : □ 80mm sq. (3.15 in.sq.)
- **9** : □ 90mm sq. (3.54 in.sq.)
- **10** : □ 104mm sq. (4.09 in.sq.)

Frame Type
- **B** : Box Type
- **F** : Flange Type (Only available for powerful and high powerful type Gearbox)

Bearing Type
- **B** : Ball Bearing
- **BM** : Ball Bearing + Metal Bearing
- **M** : Metal Bearing

9 P B K 36 B H

Gear Type
- **G** : General Gear (6W~40W)
- **P** : Powerful Gear (40W~120W)
- **H** : High Powerful Gear (60W~200W)
- **U** : Ultra Powerful Gear (250W~400W)

Output Shaft Type
- **K** : Key Type
- **D** : D-Cut Type

Gear Ratio
- **36** : 1/36

Input Gear Type
- **H** : Helical Gear

Worm Solid Gearbox

Gearbox Type
- **W** : Worm Solid Type Gearbox (15W~120W)

Gear Ratio
- **30** : 1/30

Direction of Output Shaft
- **L** : Left
- **R** : Right
- **RL** : Bi-directional

9 W D 30 B L

Gearbox Frame Size
- **8** : □ 80mm sq. (3.15 in.sq.)
- **9** : □ 90mm sq. (3.54 in.sq.)

Brand
- **D** : DKM

Bearing Type
- **B** : Ball Bearing



※ Ref.
1. Direction of Output Shaft –
L : Left R : Right
2. When direction of lead wire is right side of motor.

Worm Hollow Gearbox

Gearbox Type
- **WH** : Worm Hollow Gearbox (60W~400W)

Gear Ratio
- **30** : 1/30

9 WH D 30 — 030

Gearbox Frame Size
- **9** : □ 90mm sq. (3.54 in.sq.)
- **10** : □ 104mm sq. (4.09 in.sq.)

Brand
- **D** : DKM

Center Distance between Worm Wheel and Shaft
- **030** : 30mm
- **040** : 40mm

Helicross Gearbox

Gearbox Type
- **HC** : Helicross Gearbox (90W ~ 400W)

Output Shaft Material
- **B** : S45C
- **S** : SUS

9 HC 240 B

Gearbox Frame Size
- **9** : □ 90mm sq. (3.54 in.sq.)
- **10** : □ 104mm sq. (4.09 in.sq.)

Gear Ratio
- **240** : 1/240

A Information

Product Coding System

Inter-decimal Gearbox

X10 Inter-decimal Gearbox

G : 'G' Type Shaft Motor (40W)
P : 'P' Type Shaft Motor (40W~120W)

9 X D 10 G Z

Gearbox Frame Size
8 : □ 80mm sq. (3.15 in.sq.)
9 : □ 90mm sq. (3.54 in.sq.)

Brand
D : DKM

Gear Ratio
10 : 1/10

Attaching Gearbox
G : General Type (Helical)
P : Powerful Type
H : High Powerful Type
Z : Worm Hollow Type
W : Worm Solid type

In case of requiring high gear reduction ratio that cannot be generated by single gearbox, please use inter-decimal gearbox with a general gearbox.
And please be advised that in this case only revolution speed of output shaft will be reduced by 10:1 without increasing of maximum permissible torque.

Assembly of Motor and Gearbox

Motor + Gearbox

- As shown in the following scheme, the motor and the gearbox which have same frame size and gear type could be assembled.

Motor — Parallel Gearbox

8 I D G E - 25 G — **8 G B K 36 B M H**

Frame Size(□80mm)

Gear: G Type

Motor — Worm Gearbox

9 I D G E - 60 F W — **9 W D 36 B L**

Frame Size(□90mm)

Gear: W Type

Motor + Inter-decimal Gearbox + Gearbox

- When using an inter-decimal gearbox together, give attention to the gear types of a motor, a gearbox and an inter-decimal gearbox.

Motor — Inter-decimal Gearbox — Gearbox

9 I D G E - 40 G — **9 X D 10 G G** — **9 G B K 36 B M H**

Frame Size(□90mm)

Gear: G Type

Gear: G Type

Products Lineup

AC Motors

Frame Size	Voltage / Output	Induction Motor												Page
		1(A)	B	C	2(D)	E	3(G)	J	4(K)	5(L)	6	7	8	
		1Ø 110V 60Hz	1Ø 100V 50/60Hz	1Ø 200V 50/60Hz	1Ø 220V 60Hz	1Ø 220~240V 50Hz	3Ø 220~230V 50/60Hz	3Ø 200~220V 50/60Hz	3Ø 380V~400V 50/60Hz	3Ø 415V~440V 50/60Hz	3Ø 220/380V 60Hz	3Ø 230/400V 50Hz	3Ø 440V 50/60Hz	
60mm	6W	6ID◇1(A)-6□ (-T)	6ID◇B-6□ (-T)	6ID◇C-6□ (-T)	6ID◇2(D)-6□ (-T)	6ID◇E-6□ (-T)	6ID◇3(G)-6□ (-T)	-	-	-	-	-	-	B-09
70mm	6W	7ID◇1(A)-6□ (-T)	7ID◇B-6□ (-T)	7ID◇C-6□ (-T)	7ID◇2(D)-6□ (-T)	7ID◇E-6□ (-T)	-	-	-	-	-	-	-	B-11
	10W	7ID◇1(A)-10□ (-T)	7ID◇B-10□ (-T)	7ID◇C-10□ (-T)	7ID◇2(D)-10□ (-T)	7ID◇E-10□ (-T)	-	-	-	-	-	-	-	B-13
	15W	7ID◇1(A)-15□ (-T)	7ID◇B-15□ (-T)	7ID◇C-15□ (-T)	7ID◇2(D)-15□ (-T)	7ID◇E-15□ (-T)	7ID◇3(G)-15□ (-T)	-	-	-	-	-	-	B-15
80mm	15W	8ID◇1(A)-15□ (-T)	8ID◇B-15□ (-T)	8ID◇C-15□ (-T)	8ID◇2(D)-15□ (-T)	8ID◇E-15□ (-T)	8ID◇3(G)-15□ (-T)	8ID◇J-15□ (-T)	8ID◇4(K)-15□ (-T)	8ID◇5(L)-15□ (-T)	-	-	-	B-17
	25W	8ID◇1(A)-25□ (-T)	8ID◇B-25□ (-T)	8ID◇C-25□ (-T)	8ID◇2(D)-25□ (-T)	8ID◇E-25□ (-T)	8ID◇3(G)-25□ (-T)	8ID◇J-25□ (-T)	8ID◇4(K)-25□ (-T)	8ID◇5(L)-25□ (-T)	-	-	-	B-20
	40W	8ID◇1(A)-40□ (-T)	8ID◇B-40□ (-T)	8ID◇C-40□ (-T)	8ID◇2(D)-40□ (-T)	8ID◇E-40□ (-T)	-	-	-	-	-	-	-	B-23
90mm	40W	9ID◇1(A)-40□ (-T)	9ID◇B-40□ (-T)	9ID◇C-40□ (-T)	9ID◇2(D)-40□ (-T)	9ID◇E-40□ (-T)	9ID◇3(G)-40□ (-T)	9ID◇J-40□ (-T)	9ID◇4(K)-40□ (-T)	9ID◇5(L)-40□ (-T)	-	-	-	B-25
	60W	9ID◇1(A)-60F□ (-T)	9ID◇B-60F□ (-T)	9ID◇C-60F□ (-T)	9ID◇2(D)-60F□ (-T)	9ID◇E-60F□ (-T)	9ID◇3(G)-60F□ (-T)	9ID◇J-60F□ (-T)	9ID◇4(K)-60F□ (-T)	9ID◇5(L)-60F□ (-T)	-	-	-	B-28
	90W	9ID◇1(A)-90F□ (-T)	9ID◇B-90F□ (-T)	9ID◇C-90F□ (-T)	9ID◇2(D)-90F□ (-T)	9ID◇E-90F□ (-T)	9ID◇3(G)-90F□ (-T)	9ID◇J-90F□ (-T)	9ID◇4(K)-90F□ (-T)	9ID◇5(L)-90F□ (-T)	-	-	-	B-32
	120W	9ID◇1(A)-120F□ (-T)	-	-	9ID◇2(D)-120F□ (-T)	9ID◇E-120F□ (-T)	9ID◇3(G)-120F□ (-T)	-	9ID◇4(K)-120F□ (-T)	9ID◇5(L)-120F□ (-T)	-	-	-	B-36
	150W	-	-	-	-	-	9ID◇3(G)-150F□ (-T)	-	9ID◇4(K)-150F□ (-T)	9ID◇5(L)-150F□ (-T)	-	-	-	B-40
	180W	9ID◇1(A)-180F□ (-T)	-	-	9ID◇2(D)-180F□ (-T)	9ID◇E-180F□ (-T)	-	-	-	-	-	-	-	B-43
	200W	-	-	-	-	-	9ID◇3(G)-200F□ (-T)	-	9ID◇4(K)-200F□ (-T)	9ID◇5(L)-200F□ (-T)	-	-	-	B-46
104 mm	250W	-	-	-	-	10ID◇E-250F□ -T	-	-	-	-	-	-	-	B-49
	300W	-	-	-	10ID◇D-300F□ -T	-	-	-	-	-	-	10ID◇7-300F□ -T	10ID◇8-300F□ -T	B-52
	400W	-	-	-	-	-	-	-	-	-	10ID◇6-400F□ -T	-	-	B-55

A Information

Products Lineup

AC Motors

Frame Size	Voltage / Output	2 Pole Motor												Page
		1(A)	B	C	2(D)	E	3(G)	J	4(K)	5(L)	6	7	8	
		1Ø 110V 60Hz	1Ø 100V 50/60Hz	1Ø 200V 50/60Hz	1Ø 220V 60Hz	1Ø 220–240V 50Hz	3Ø 220–230V 50/60Hz	3Ø 200–220V 50/60Hz	3Ø 380–400V 50/60Hz	3Ø 415–440V 50/60Hz	3Ø 220/380V 60Hz	3Ø 230/400V 50Hz	3Ø 440V 50/60Hz	
80mm	15W	8ID◇1(A)-15-A (-T)	8ID◇B-15-A (-T)	8ID◇C-15-A (-T)	8ID◇2(D)-15-A (-T)	8ID◇E-15-A (-T)	8ID◇3(G)-15-A (-T)	8ID◇J-15-A (-T)	-	-	-	-	-	B-59
	25W	8ID◇1(A)-25-A (-T)	8ID◇B-25-A (-T)	8ID◇C-25-A (-T)	8ID◇2(D)-25-A (-T)	8ID◇E-25-A (-T)	8ID◇3(G)-25-A (-T)	8ID◇J-25-A (-T)	-	-	-	-	-	B-61
90mm	40W	9ID◇1(A)-40-A (-T)	9ID◇B-40-A (-T)	9ID◇C-40-A (-T)	9ID◇2(D)-40-A (-T)	9ID◇E-40-A (-T)	9ID◇3(G)-40-A (-T)	9ID◇J-40-A (-T)	9ID◇4(K)-40-A (-T)	9ID◇5(L)-40-A(-T)	-	-	-	B-63
	60W	9ID◇1(A)-60F-A (-T)	9ID◇B-60F-A (-T)	9ID◇C-60F-A (-T)	9ID◇2(D)-60F-A (-T)	9ID◇E-60F-A (-T)	9ID◇3(G)-60F-A (-T)	9ID◇J-60F-A (-T)	9ID◇4(K)-60F-A (-T)	9ID◇5(L)-60F-A (-T)	-	-	-	B-65
	90W	9ID◇1(A)-90F-A (-T)	9ID◇B-90F-A (-T)	9ID◇C-90F-A (-T)	9ID◇2(D)-90F-A (-T)	9ID◇E-90F-A (-T)	9ID◇3(G)-90F-A (-T)	9ID◇J-90F-A (-T)	9ID◇4(K)-90F-A (-T)	9ID◇5(L)-90F-A (-T)	-	-	-	B-67
	120W	9ID◇1(A)-120F-A (-T)	-	-	9ID◇2(D)-120F-A (-T)	9ID◇E-120F-A (-T)	9ID◇3(G)-120F-A (-T)	-	9ID◇4(K)-120F-A (-T)	9ID◇5(L)-120F-A (-T)	-	-	-	B-69
	150W	-	-	-	-	-	9ID◇3(G)-150F-A (-T)	-	9ID◇4(K)-150F-A (-T)	9ID◇5(L)-150F-A (-T)	-	-	-	B-71
	200W	-	-	-	-	-	9ID◇3(G)-200F-A (-T)	-	9ID◇4(K)-200F-A (-T)	9ID◇5(L)-200F-A (-T)	-	-	-	B-73

Frame Size	Voltage / Output	Reversible Motor												Page
		1(A)	B	C	2(D)	E	3(G)	J	4(K)	5(L)	6	7	8	
		1Ø 110V 60Hz	1Ø 100V 50/60Hz	1Ø 200V 50/60Hz	1Ø 220V 60Hz	1Ø 220–240V 50Hz	3Ø 220–230V 50/60Hz	3Ø 200–220V 50/60Hz	3Ø 380–400V 50/60Hz	3Ø 415–440V 50/60Hz	3Ø 220/380V 60Hz	3Ø 230/400V 50Hz	3Ø 440V 50/60Hz	
60mm	6W	6RD◇1(A)-6□ (-T)	6RD◇B-6□ (-T)	6RD◇C-6□ (-T)	6RD◇2(D)-6□ (-T)	6RD◇E-6□ (-T)	-	-	-	-	-	-	-	B-79
70mm	6W	7RD◇1(A)-6□ (-T)	7RD◇B-6□ (-T)	7RD◇C-6□ (-T)	7RD◇2(D)-6□ (-T)	7RD◇E-6□ (-T)	-	-	-	-	-	-	-	B-81
	10W	7RD◇1(A)-10□ (-T)	7RD◇B-10□ (-T)	7RD◇C-10□ (-T)	7RD◇2(D)-10□ (-T)	7RD◇E-10□ (-T)	-	-	-	-	-	-	-	B-83
	15W	7RD◇1(A)-15□ (-T)	7RD◇B-15□ (-T)	7RD◇C-15□ (-T)	7RD◇2(D)-15□ (-T)	7RD◇E-15□ (-T)	-	-	-	-	-	-	-	B-85
80mm	15W	8RD◇1(A)-15□ (-T)	8RD◇B-15□ (-T)	8RD◇C-15□ (-T)	8RD◇2(D)-15□ (-T)	8RD◇E-15□ (-T)	-	-	-	-	-	-	-	B-87
	25W	8RD◇1(A)-25□ (-T)	8RD◇B-25□ (-T)	8RD◇C-25□ (-T)	8RD◇2(D)-25□ (-T)	8RD◇E-25□ (-T)	-	-	-	-	-	-	-	B-90
90mm	40W	9RD◇1(A)-40□ (-T)	9RD◇B-40□ (-T)	9RD◇C-40□ (-T)	9RD◇2(D)-40□ (-T)	9RD◇E-40□ (-T)	-	-	-	-	-	-	-	B-93
	60W	9RD◇1(A)-60F□ (-T)	9RD◇B-60F□ (-T)	9RD◇C-60F□ (-T)	9RD◇2(D)-60F□ (-T)	9RD◇E-60F□ (-T)	-	-	-	-	-	-	-	B-96
	90W	9RD◇1(A)-90F□ (-T)	9RD◇B-90F□ (-T)	9RD◇C-90F□ (-T)	9RD◇2(D)-90F□ (-T)	9RD◇E-90F□ (-T)	-	-	-	-	-	-	-	B-100
	120W	9RD◇1(A)-120F□ (-T)	-	-	9RD◇2(D)-120F□ (-T)	9RD◇E-120F□ (-T)	-	-	-	-	-	-	-	B-104
	180W	9RD◇1(A)-180F□ (-T)	-	-	9RD◇2(D)-180F□ (-T)	9RD◇E-180F□ (-T)	-	-	-	-	-	-	-	B-107

Frame Size	Voltage / Output	Electromagnetic Brake Motor												Page
		1(A)	B	C	2(D)	E	3(G)	J	4(K)	5(L)	6	7	8	
		1Ø 110V 60Hz	1Ø 100V 50/60Hz	1Ø 200V 50/60Hz	1Ø 220V 60Hz	1Ø 220-240V 50Hz	3Ø 220-230V 50/60Hz	3Ø 200-220V 50/60Hz	3Ø 380-400V 50/60Hz	3Ø 415-440V 50/60Hz	3Ø 220/380V 60Hz	3Ø 230/400V 50Hz	3Ø 440V 50/60Hz	
60mm	6W	6BD◇1(A)-6□	6BD◇B-6□	6BD◇C-6□	6BD◇2(D)-6□	6BD◇E-6□	6BD◇3(G)-6□	-	-	-	-	-	-	B-115
70mm	6W	7BD◇1(A)-6□	7BD◇B-6□	7BD◇C-6□	7BD◇2(D)-6□	7BD◇E-6□	-	-	-	-	-	-	-	B-117
	10W	7BD◇1(A)-10□	7BD◇B-10□	7BD◇C-10□	7BD◇2(D)-10□	7BD◇E-10□	-	-	-	-	-	-	-	B-119
	15W	7BD◇1(A)-15□	7BD◇B-15□	7BD◇C-15□	7BD◇2(D)-15□	7BD◇E-15□	7BD◇3(G)-15□	-	-	-	-	-	-	B-121
80mm	15W	8BD◇1(A)-15□	8BD◇B-15□	8BD◇C-15□	8BD◇2(D)-15□	8BD◇E-15□	8BD◇3(G)-15□	8BD◇J-15□	8BD◇4(K)-15□	8BD◇5(L)-15□	-	-	-	B-123
	25W	8BD◇1(A)-25□	8BD◇B-25□	8BD◇C-25□	8BD◇2(D)-25□	8BD◇E-25□	8BD◇3(G)-25□	8BD◇J-25□	8BD◇4(K)-25□	8BD◇5(L)-25□	-	-	-	B-126
90mm	40W	9BD◇1(A)-40□	9BD◇B-40□	9BD◇C-40□	9BD◇2(D)-40□	9BD◇E-40□	9BD◇3(G)-40□	9BD◇J-40□	9BD◇4(K)-40□	9BD◇5(L)-40□	-	-	-	B-129
	60W	9BD◇1(A)-60F□	9BD◇B-60F□	9BD◇C-60F□	9BD◇2(D)-60F□	9BD◇E-60F□	9BD◇3(G)-60F□	9BD◇J-60F□	9BD◇4(K)-60F□	9BD◇5(L)-60F□	-	-	-	B-132
	90W	9BD◇1(A)-90F□	9BD◇B-90F□	9BD◇C-90F□	9BD◇2(D)-90F□	9BD◇E-90F□	9BD◇3(G)-90F□	9BD◇J-90F□	9BD◇4(K)-90F□	9BD◇5(L)-90F□	-	-	-	B-136
	120W	9BD◇1(A)-120F□	-	-	9BD◇2(D)-120F□	9BD◇E-120F□	9BD◇3(G)-120F□	-	9BD◇4(K)-120F□	9BD◇5(L)-120F□	-	-	-	B-140
	150W	-	-	-	-	-	9BD◇3(G)-150F□	-	9BD◇4(K)-150F□	9BD◇5(L)-150F□	-	-	-	B-144
	180W	9BD◇1(A)-180F□	-	-	9BD◇2(D)-180F□	9BD◇E-180F□	-	-	-	-	-	-	-	B-147
	200W	-	-	-	-	-	9BD◇3(G)-200F□	-	9BD◇4(K)-200F□	9BD◇5(L)-200F□	-	-	-	B-150
104 mm	250W	-	-	-	-	10BD◇E-250F□-T	-	-	-	-	-	-	-	B-153
	300W	-	-	-	10BD◇D-300F□-T	-	-	-	-	-	-	10BD◇7-300F□-T	10BD◇8-300F□-T	B-156
	400W	-	-	-	-	-	-	-	-	-	10BD◇6-400F□-T	-	-	B-159

Frame Size	Voltage / Output	Clucth & Brake Motor												Page
		1(A)	B	C	2(D)	E	3(G)	J	4(K)	5(L)	6	7	8	
		1Ø 110V 60Hz	1Ø 100V 50/60Hz	1Ø 200V 50/60Hz	1Ø 220V 60Hz	1Ø 220-240V 50Hz	3Ø 220-230V 50/60Hz	3Ø 200-220V 50/60Hz	3Ø 380-400V 50/60Hz	3Ø 415-440V 50/60Hz	3Ø 220/380V 60Hz	3Ø 230/400V 50Hz	3Ø 440V 50/60Hz	
80mm	15W	8CID◇1(A)-15□	8CID◇B-15□	8CID◇C-15□	8CID◇2(D)-15□	8CID◇E-15□	8CID◇3(G)-15□	8CID◇J-15□	8CID◇4(K)-15□	8CID◇5(L)-15□	-	-	-	B-165
	25W	8CID◇1(A)-25□	8CID◇B-25□	8CID◇C-25□	8CID◇2(D)-25□	8CID◇E-25□	8CID◇3(G)-25□	8CID◇J-25□	8CID◇4(K)-25□	8CID◇5(L)-25□	-	-	-	B-167
90mm	40W	9CID◇1(A)-40□	9CID◇B-40□	9CID◇C-40□	9CID◇2(D)-40□	9CID◇E-40□	9CID◇3(G)-40□	9CID◇J-40□	9CID◇4(K)-40□	9CID◇5(L)-40□	-	-	-	B-169
	60W	9CID◇1(A)-60F2□	9CID◇B-60F2□	9CID◇C-60F2□	9CID◇2(D)-60F2□	9CID◇E-60F2□	9CID◇3(G)-60F2□	9CID◇J-60F2□	9CID◇4(K)-60F2□	9CID◇5(L)-60F2□	-	-	-	B-171
	90W	9CID◇1(A)-90F2□	9CID◇B-90F2□	9CID◇C-90F2□	9CID◇2(D)-90F2□	9CID◇E-90F2□	9CID◇3(G)-90F2□	9CID◇J-90F2□	9CID◇4(K)-90F2□	9CID◇5(L)-90F2□	-	-	-	B-173
	120W	9CID◇1(A)-120F2□	-	-	9CID◇2(D)-120F2□	9CID◇E-120F2□	9CID◇3(G)-120F2□	-	9CID◇4(K)-120F2□	9CID◇5(L)-120F2□	-	-	-	B-175

A Information

Products Lineup

AC Motors

Frame Size	Voltage / Output	Torque Motor												Page
		1(A)	B	C	2(D)	E	3(G)	J	4(K)	5(L)	6	7	8	
		1Ø 110V 60Hz	1Ø 100V 50/60Hz	1Ø 200V 50/60Hz	1Ø 220V 60Hz	1Ø 220–240V 50Hz	3Ø 220–230V 50/60Hz	3Ø 200–220V 50/60Hz	3Ø 380V–400V 50/60Hz	3Ø 415V–440V 50/60Hz	3Ø 220/380V 60Hz	3Ø 230/400V 50Hz	3Ø 440V 50/60Hz	
60mm	3W	6TD◇1(A)-3¤	–	–	6TD◇2(D)-3¤	6TD◇E-3¤	–	–	–	–	–	–	–	B-189
70mm	6W	7TD◇1(A)-6¤	–	–	7TD◇2(D)-6¤	7TD◇E-6¤	–	–	–	–	–	–	–	B-191
80mm	10W	8TD◇1(A)-10¤	–	–	8TD◇2(D)-10¤	8TD◇E-10¤	–	–	–	–	–	–	–	B-193
90mm	20W	9TD◇1(A)-20F2¤	–	–	9TD◇2(D)-20F2¤	9TD◇E-20F2¤	–	–	–	–	–	–	–	B-195
	30W	9TD◇1(A)-30F2¤	–	–	9TD◇2(D)-30F2¤	9TD◇E-30F2¤	–	–	–	–	–	–	–	B-197
	40W	9TD◇1(A)-40F2¤	–	–	9TD◇2(D)-40F2¤	9TD◇E-40F2¤								B-200
	60W	9TD◇1(A)-60F2¤	–	–	9TD◇2(D)-60F2¤	9TD◇E-60F2¤	–	–	–	–	–	–	–	B-203

Frame Size	Voltage / Output	Speed Control Induction Motor												Page
		1(A)	B	C	2(D)	E	3(G)	J	4(K)	5(L)	6	7	8	
		1Ø 110V 60Hz	1Ø 100V 50/60Hz	1Ø 200V 50/60Hz	1Ø 220V 60Hz	1Ø 220–240V 50Hz	3Ø 220–230V 50/60Hz	3Ø 200–220V 50/60Hz	3Ø 380–400V 50/60Hz	3Ø 415–440V 50/60Hz	3Ø 220/380V 60Hz	3Ø 230/400V 50Hz	3Ø 440V 50/60Hz	
60mm	6W	6SD◇1(A)-6¤	6SD◇B-6¤	6SD◇C-6¤	6SD◇2(D)-6¤	6SD◇E-6¤	–	–	–	–	–	–	–	B-225
70mm	6W	7SD◇1(A)-6¤	7SD◇B-6¤	7SD◇C-6¤	7SD◇2(D)-6¤	7SD◇E-6¤	–	–	–	–	–	–	–	B-227
	10W	7SD◇1(A)-10¤	7SD◇B-10¤	7SD◇C-10¤	7SD◇2(D)-10¤	7SD◇E-10¤	–	–	–	–	–	–	–	B-229
	15W	7SD◇1(A)-15¤	7SD◇B-15¤	7SD◇C-15¤	7SD◇2(D)-15¤	7SD◇E-15¤	–	–	–	–	–	–	–	B-231
80mm	15W	8SD◇1(A)-15¤	8SD◇B-15¤	8SD◇C-15¤	8SD◇2(D)-15¤	8SD◇E-15¤	–	–	–	–	–	–	–	B-233
	25W	8SD◇1(A)-25¤	8SD◇B-25¤	8SD◇C-25¤	8SD◇2(D)-25¤	8SD◇E-25¤	–	–	–	–	–	–	–	B-236
90mm	40W	9SD◇1(A)-40¤	9SD◇B-40¤	9SD◇C-40¤	9SD◇2(D)-40¤	9SD◇E-40¤	–	–	–	–	–	–	–	B-239
	60W	9SD◇1(A)-60F2¤	9SD◇B-60F2¤	9SD◇C-60F2¤	9SD◇2(D)-60F2¤	9SD◇E-60F2¤	–	–	–	–	–	–	–	B-242
	90W	9SD◇1(A)-90F2¤	9SD◇B-90F2¤	9SD◇C-90F2¤	9SD◇2(D)-90F2¤	9SD◇E-90F2¤	–	–	–	–	–	–	–	B-246
	120W	9SD◇1(A)-120F2¤	–	–	9SD◇2(D)-120F2¤	9SD◇E-120F2¤	–	–	–	–	–	–	–	B-250
	180W	9SD◇1(A)-180F2¤	–	–	9SD◇2(D)-180F2¤	9SD◇E-180F2¤	–	–	–	–	–	–	–	B-254

Frame Size	Voltage / Output	Speed Control Reversible Motor												Page
		1(A)	B	C	2(D)	E	3(G)	J	4(K)	5(L)	6	7	8	
		1Ø 110V 60Hz	1Ø 100V 50/60Hz	1Ø 200V 50/60Hz	1Ø 220V 60Hz	1Ø 2 20-240V 50Hz	3Ø 220-230V 50/60Hz	3Ø 200-220V 50/60Hz	3Ø 380-400V 50/60Hz	3Ø 415-440V 50/60Hz	3Ø 220/380V 60Hz	3Ø 230/400V 50Hz	3Ø 440V 50/60Hz	
60mm	6W	6SRD◇1(A)-6□	6SRD◇B-6□	6SRD◇C-6□	6SRD◇2(D)-6□	6SRD◇E-6□	-	-	-	-	-	-	-	B-259
70mm	6W	7SRD◇1(A)-6□	7SRD◇B-6□	7SRD◇C-6□	7SRD◇2(D)-6□	7SRD◇E-6□	-	-	-	-	-	-	-	B-261
	10W	7SRD◇1(A)-10□	7SRD◇B-10□	7SRD◇C-10□	7SRD◇2(D)-10□	7SRD◇E-10□	-	-	-	-	-	-	-	B-263
	15W	7SRD◇1(A)-15□	7SRD◇B-15□	7SRD◇C-15□	7SRD◇2(D)-15□	7SRD◇E-15□	-	-	-	-	-	-	-	B-265
80mm	15W	8SRD◇1(A)-15□	8SRD◇B-15□	8SRD◇C-15□	8SRD◇2(D)-15□	8SRD◇E-15□	-	-	-	-	-	-	-	B-267
	25W	8SRD◇1(A)-25□	8SRD◇B-25□	8SRD◇C-25□	8SRD◇2(D)-25□	8SRD◇E-25□	-	-	-	-	-	-	-	B-270
90mm	40W	9SRD◇1(A)-40□	9SRD◇B-40□	9SRD◇C-40□	9SRD◇2(D)-40□	9SRD◇E-40□	-	-	-	-	-	-	-	B-273
	60W	9SRD◇1(A)-60F2□	9SRD◇B-60F2□	9SRD◇C-60F2□	9SRD◇2(D)-60F2□	9SRD◇E-60F2□	-	-	-	-	-	-	-	B-276
	90W	9SRD◇1(A)-90F2□	9SRD◇B-90F2□	9SRD◇C-90F2□	9SRD◇2(D)-90F2□	9SRD◇E-90F2□	-	-	-	-	-	-	-	B-280
	120W	9SRD◇1(A)-120F2□	-	-	9SRD◇2(D)-120F2□	9SRD◇E-120F2□	-	-	-	-	-	-	-	B-284

Frame Size	Voltage / Output	Speed Control E.M. Brake Motor												Page
		1(A)	B	C	2(D)	E	3(G)	J	4(K)	5(L)	6	7	8	
		1Ø 110V 60Hz	1Ø 100V 50/60Hz	1Ø 200V 50/60Hz	1Ø 220V 60Hz	1Ø 220-240V 50Hz	3Ø 220-230V 50/60Hz	3Ø 200-220V 50/60Hz	3Ø 380-400V 50/60Hz	3Ø 4 15-440V 50/60Hz	3Ø 220/380V 60Hz	3Ø 230/400V 50Hz	3Ø 440V 50/60Hz	
60mm	6W	6SBD◇1(A)-6□	6SBD◇B-6□	6SBD◇C-6□	6SBD◇2(D)-6□	6SBD◇E-6□	-	-	-	-	-	-	-	B-289
70mm	6W	7SBD◇1(A)-6□	7SBD◇B-6□	7SBD◇C-6□	7SBD◇2(D)-6□	7SBD◇E-6□	-	-	-	-	-	-	-	B-291
	10W	7SBD◇1(A)-10□	7SBD◇B-10□	7SBD◇C-10□	7SBD◇2(D)-10□	7SBD◇E-10□	-	-	-	-	-	-	-	B-293
	15W	7SBD◇1(A)-15□	7SBD◇B-15□	7SBD◇C-15□	7SBD◇2(D)-15□	7SBD◇E-15□	-	-	-	-	-	-	-	B-295
80mm	15W	8SBD◇1(A)-15□	8SBD◇B-15□	8SBD◇C-15□	8SBD◇2(D)-15□	8SBD◇E-15□	-	-	-	-	-	-	-	B-297
	25W	8SBD◇1(A)-25□	8SBD◇B-25□	8SBD◇C-25□	8SBD◇2(D)-25□	8SBD◇E-25□	-	-	-	-	-	-	-	B-300
90mm	40W	9SBD◇1(A)-40□	9SBD◇B-40□	9SBD◇C-40□	9SBD◇2(D)-40□	9SBD◇E-40□	-	-	-	-	-	-	-	B-303
	60W	9SBD◇1(A)-60F2□	9SBD◇B-60F2□	9SBD◇C-60F2□	9SBD◇2(D)-60F2□	9SBD◇E-60F2□	-	-	-	-	-	-	-	B-306
	90W	9SBD◇1(A)-90F2□	9SBD◇B-90F2□	9SBD◇C-90F2□	9SBD◇2(D)-90F2□	9SBD◇E-90F2□	-	-	-	-	-	-	-	B-310
	120W	9SBD◇1(A)-120F2□	-	-	9SBD◇2(D)-120F2□	9SBD◇E-120F2□	-	-	-	-	-	-	-	B-314
	180W	9SBD◇1(A)-180F2□	-	-	9SBD◇2(D)-180F2□	9SBD◇E-180F2□	-	-	-	-	-	-	-	B-318

A Information

Products Lineup

AC Motors

Frame Size	Voltage / Output	Speed Control Clutch & Brake Motor												Page
		1(A)	B	C	2(D)	E	3(G)	J	4(K)	5(L)	6	7	8	
		1Ø 110V 60Hz	1Ø 100V 50/60Hz	1Ø 200V 50/60Hz	1Ø 220V 60Hz	1Ø 220-240V 50Hz	3Ø 220-230V 50/60Hz	3Ø 200-220V 50/60Hz	3Ø 380-400V 50/60Hz	3Ø 415-440V 50/60Hz	3Ø 220/380V 60Hz	3Ø 230/400V 50Hz	3Ø 440V 50/60Hz	
80mm	15W	8CSD◇1(A)-15G	8CSD◇B-15G	8CSD◇C-15G	8CSD◇2(D)-15G	8CSD◇E-15G	-	-	-	-	-	-	-	B-323
	25W	8CSD◇1(A)-25G	8CSD◇B-25G	8CSD◇C-25G	8CSD◇2(D)-25G	8CSD◇E-25G	-	-	-	-	-	-	-	B-325
90mm	40W	9CSD◇1(A)-40□	9CSD◇B-40□	9CSD◇C-40□	9CSD◇2(D)-40□	9CSD◇E-40□	-	-	-	-	-	-	-	B-327
	60W	9CSD◇1(A)-60F2□	9CSD◇B-60F2□	9CSD◇C-60F2□	9CSD◇2(D)-60F2□	9CSD◇E-60F2□	-	-	-	-	-	-	-	B-329
	90W	9CSD◇1(A)-90F2□	9CSD◇B-90F2□	9CSD◇C-90F2□	9CSD◇2(D)-90F2□	9CSD◇E-90F2□	-	-	-	-	-	-	-	B-331
	120W	9CSD◇1(A)-120F2□	-	-	9CSD◇2(D)-120F2□	9CSD◇E-120F2□	-	-	-	-	-	-	-	B-333

1. Enter the output shaft type of motor (G: Gear Type/D: D-Cut Type/K: Key Type) in the place ◇within the motor model name.
2. Enter the model type of attaching gearbox (G Type/P Type/H Type/W Type/WH Type/HC Type) in the place □.
3. When using terminal box type motors, '-T' is added to the end of the motor model name.
4. The phase & voltage code A, B, C, D, E, G, J, K, L contain a built- in thermal protector.
5. 60mm motors are Impedance Protected Type.

DSY Classified Table

Voltage / Output	DSY Series Induction Motor			Page
	3 (G)	4(K)	5(L)	
	3Ø 220-230V 50/60Hz	3Ø 380-400V 50/60Hz	3Ø 415-440V 50/60Hz	
100W	DSY○◇-□N010-3(G)	DSY○◇-□N010-4(K)	DSY○◇-□N010-5(L)	B-343
200W	DSY○◇-□N020-3(G)	DSY○◇-□N020-4(K)	DSY○◇-□N020-5(L)	B-345
400W	DSY○◇-□N040-3(G)	DSY○◇-□N040-4(K)	DSY○◇-□N040-5(L)	B-347

Voltage / Output	DSY Series Brake Motor			Page
	3 (G)	4(K)	5(L)	
	3Ø 220-230V 50/60Hz	3Ø 380-400V 50/60Hz	3Ø 415-440V 50/60Hz	
100W	DSY○◇-□B010-3(G)	DSY○◇-□B010-4(K)	DSY○◇-□B010-5(L)	B-351
200W	DSY○◇-□B020-3(G)	DSY○◇-□B020-4(K)	DSY○◇-□B020-5(L)	B-353
400W	DSY○◇-□B040-3(G)	DSY○◇-□B040-4(K)	DSY○◇-□B040-5(L)	B-355

1.Enter the output shaft diameter (20 : Ø20 / 25 : Ø25 / 30 : Ø30) in the place of ○.
2.Enter the output shaft material in the place of (B : S45C / S : SUS) in the place of ◇.
3.Enter the gear ratio (7.5 : 7.5:1 / 10 : 10:1 / 12.5 : 12.5:1 · · ·) in the place of □.
4.The phase & voltage code G, K, L contain a built- in thermal protector.

DC Motors

Frame Size	Voltage / Output	DC Motors			Page
		DC 12V	DC 24V	DC 90V	
60mm	15W	6DC◇12-15-30	6DC◇24-15-30	6DC◇90-15-30	C-05
80mm	25W	8DC◇12-25-30	8DC◇24-25-30	8DC◇90-25-30	C-07
	40W	8DC◇12-40-30	8DC◇24-40-30	8DC◇90-40-30	C-09
90mm	60W	9DC◇12-60-30	9DC◇24-60-30	9DC◇90-60-30	C-11
	90W	9DC◇12-90-30	9DC◇24-90-30	9DC◇90-90-30	C-13
	120W	9DC◇12-120-30	9DC◇24-120-30	9DC◇90-120-30	C-15
	200W	9DC◇12-200-30	9DC◇24-200-30	9DC◇90-200-30	C-17

1.Enter the output shaft type of motor in the place ◇.
(D: D-Cut Type/K: Key Type /G: Shaft for G Type Gearbox/P: Shaft for P Type Gearbox/W : Shaft for W Type Gearbox)

Gearboxes

Type		Frame Size	Gearbox Model	Gear Reduction Ratio	Page
Parallel Gearbox	G Type	60mm	6GBD□MH	3/3.6/5/6/7.5/9/10/12.5/15/18/20/25/30/36/40/50/60/75/90/100/120/150/180/200/250	D-07
		70mm	7GBK□BMH	3/3.6/5/6/7.5/9/10/12.5/15/18/20/25/30/36/40/50/60/75/90/100/120/150/180/200	D-07
		80mm	8GBK□BMH	3/3.6/5/6/7.5/9/10/12.5/15/18/20/25/30/36/40/50/60/75/90/100/120/150180/200/250/300/360	D-08
		90mm	9GBK□BMH	2/3/3.6/5/6/7.5/9/10/12.5/15/18/20/25/30/36/40/50/60/75/90/100/120/150/180/200	D-09
	P Type	90mm	9PBK□BH/ 9PFK□BH	2/3/3.6/5/6/7.5/9/10/12.5/15/18/20/25/30/36/40/50/60/75/90/100/120/150/180/200	D-10
	H Type	90mm	9HBK□BH/ 9HFK□BH	3/3.6/5/6/7.5/9/10/12.5/15/18/20/25/30/36/40/50/60/75/90/100/120/150/180/200	D-11
	U Type	104mm	10UBK□BH	3/5/9/10/15/20/25/30/40/50/60/90/100/120/150/180	D-12
Right Angle Gearbox	W Type	80mm	8WD□BL/ □BR/ □BRL	10/12/15/18/25/30/36/50/60	D-13
		90mm	9WD□BL/ □BR/ □BRL	10/12/15/18/25/30/36/50/60	D-13
	WH Type	90mm	9WHD□-030	5/7.5/10/15/20/25/30/40/50/60/80	D-14
		90mm	9WHD□-040	50/60/80/100	D-15
		104mm	10WHD□-040	5/7.5/10/15/20/25/30/40	D-15
	HC Type	90mm	9HC□-◇	15/20/25/30/40/50/60/80/100/120/160/200/225/240	D-16
		104mm	10HC□-◇	15/20/25/30/40/50/60/80/100/120/160/200/225/240	D-16
Inter-decimal Gearbox	XD Type	80mm	8XD10○○	10	D-18
		90mm	9XD10○○	10	D-18

1.Enter the gear ratio (3 : 3:1 / 3.6 : 3.6:1 / 5 : 5:1 · · ·) in the place of □.
2.Enter the output shaft material (B : S45C / S : SUS) in the place of ◇.
3.Enter the model type of attaching gearbox in the place of ○ of Inter-decimal Gearbox.

A Information

General Information

A guide to combinations of gearboxes and motors

Type		Model (□ : Ratio)	Product Picture	Gear Ratio(n :1)
Parallel Gearbox	G type (General type)	6GBD□ MH(BH)		3 / 3.6 / 5 / 6 / 7.5 / 9 / 10 / 12.5 / 15 / 18
				20 / 25 / 30 / 36 / 40
				50 / 60 / 75 / 90 / 100 / 120 / 150 / 180 / 200 / 250
		7GBK□ BMH(BH)		3 / 3.6 / 5 / 6 / 7.5 / 9 / 10 / 12.5 / 15 / 18
				20 / 25 / 30 / 36 / 40
				50 / 60 / 75 / 90 / 100 / 120 / 150 / 180 / 200
		8GBK□ BMH(BH)		3 / 3.6 / 5 / 6 / 7.5 / 9 / 10 / 12.5 / 15 / 18
				20 / 25 / 30
				36 / 40
				50 / 60 / 75 / 90 / 100 / 120 / 150 / 180
				200 / 250 / 300 / 360
		9GBK□ BMH(BH)		2 / 3 / 3.6 / 5 / 6 / 7.5 / 9 / 10 / 12.5 / 15 / 18
				20 / 25 / 30
				36 / 40
				50 / 60 / 75 / 90 / 100 / 120 / 150 / 180 / 200
	PB type (Powerful Box type) & PF type (Powerful Flange type)	9PBK□BH 9PFK□BH		2 / 3 / 3.6 / 5 / 6 / 7.5 / 9 / 10
				12.5 / 15 / 18 / 20
				25 / 30 / 36 / 40 / 50 / 60
				75 / 90 / 100 / 120 / 150 / 180 / 200
	HB type (High Powerful Box type) & HF type (High Powerful Flange type)	9HBK□BH 9HFK□BH		3 / 3.6 / 5 / 6 / 7.5 / 9 / 10
				12.5 / 15 / 18 / 20
				25 / 30 / 36 / 40 / 50 / 60
				75 / 90 / 100 / 120 / 150 / 180 / 200
	UB type (High Powerful Box type)	10UBK□BH		3 / 5 / 9
				10 / 15
				20 / 25 / 30 / 40 / 50 / 60
				90 / 100 / 120 / 150 / 180

	Max. torque and Shaft Diameter	Load	Attachable Inter-decimal Gearbox	Applicable Motor	Output	Separability of Products
	Max. 30kgfcm Permissible Torque (Ø8 shaft)	For uniform loads Service Factor 1.0	–	Induction / Reversible / Brake / Torque / Speed Control Motor	3~6W	Separable
	Max. 50kgfcm Permissible Torque (Ø10 shaft)	For uniform loads Service Factor 1.0	–	Induction / Reversible / Brake / Torque / Speed Control Motor	6~15W	
	Max. 80kgfcm Permissible Torque (Ø10 shaft)	For uniform loads Service Factor 1.0	8XD10GG	Induction / Reversible / Brake / Torque / Speed Control / Clutch Brake Motor	15~40W	
	Max. 100kgfcm Permissible Torque (Ø12 shaft)	For uniform loads Service Factor 1.0	9XD10GG	Induction / Reversible / Brake / Torque / Speed Control / Clutch Brake Motor	40W	
	Max. 200kgfcm Permissible Torque (Ø15 shaft)	For uniform loads Service Factor 1.0	9XD10□P	Induction / Reversible / Brake / Torque / Speed Control / Clutch Brake Motor	40~120W	
	Max. 300kgfcm Permissible Torque (Ø18 shaft)	For uniform loads Service Factor 1.0	9XD10□H	Induction / Reversible / Brake / Torque / Speed Control	60~200W	
	Max. 400kgfcm Permissible Torque (Ø22 shaft)	For uniform loads Service Factor 1.0	–	Induction / Brake Motor	250~400W	

A Information

I General Information

A guide to combinations of gearboxes and motors

Type		Model (□ : Gear ratio)	Product Picture	Gear Ratio (n :1)
Right Angle Gearbox	Worm Solid Gearbox	8WD□ BL/ BR/ BRL		10 / 12 / 15 / 18 / 25 / 30 / 36 / 50 / 60
		9WD□ BL/ BR/ BRL		
	Worm Hollow Gearbox	9WHD□–030		5 / 7.5 / 10 / 15 / 20 / 25 / 30 / 40 / 50 / 60 / 80
		9WHD□–040		50 / 60 / 80 / 100
		10WHD□–040		5 / 7.5 / 10 / 15 / 20 / 25 / 30 / 40
	Helicross Gearbox	9HC□–◇		15 / 20 / 25 / 30
				40 / 50 / 60
				80 / 100 / 120
				160 / 200 / 225 / 240
		10HC□–◇		15 / 20 / 25 / 30
				40 / 50 / 60
				80 / 100 / 120
				160 / 200 / 225 / 240
	DSY Series (Induction Motor)	DSY○◇–□N010–*		7.5 / 10 / 12.5 / 15 / 20 / 25 / 30
				40 / 50
				60
		DSY○◇–□N020–*		7.5 / 10 / 12.5 / 15 / 20 / 25 / 30
				40 / 50
				60
		DSY○◇–□N040–*		7.5 / 10 / 12.5 / 15 / 20 / 25 / 30
				40 / 50
				60
	DSY Series (Brake Motor)	DSY○◇–□B010–*		7.5 / 10 / 12.5 / 15 / 20 / 25 / 30
				40 / 50
				60
		DSY○◇–□B020–*		7.5 / 10 / 12.5 / 15 / 20 / 25 / 30
				40 / 50
				60
		DSY○◇–□B040–*		7.5 / 10 / 12.5 / 15 / 20 / 25 / 30
				40 / 50
				60

	Max torque and Shaft Diameter	Load	Attachable Inter-decimal Gearbox	Applicable Motor	Output	Separability of Products
	Max. 70kgfcm Permissible Torque (Φ10 shaft)	For uniform loads Service Factor 1.0	8XD10GW	Induction / Reversible / Brake / Speed Control Motor	15W-40W	Separable
	Max. 150kgfcm Permissible Torque (Φ15 shaft)		9XD10GW		40W-120W	
	Max. 210kgfcm Permissible Torque (Φ14 shaft)		9XD10□Z		60W-200W	
	Max. 398kgfcm Permissible Torque (Φ18 shaft)		9XD10□Z		150W-200W	
			-		250W-400W	
	Max. 1800kgfcm Permissible Torque (Φ25 Shaft)	For medium impact load Service Factor 1.4	-	Induction / Brake / Speed Control Motor	90W-200W	
	Max. 3000kgfcm Permissible Torque (Φ30 Shaft)	For medium impact load Service Factor 1.4	-	Induction / Brake Motor	250W-400W	
	Max. 330kgfcm Permissible Torque (Φ20, Φ25 Shaft)	For uniform loads Service Factor 1.0	-	Induction / Brake Motor	100W	Non-separable
	Max. 650kgfcm Permissible Torque (Φ20, Φ25 Shaft)	For uniform loads Service Factor 1.0	-		200W	
	Max. 1300kgfcm Permissible Torque (Φ25, Φ30 Shaft)	For uniform loads Service Factor 1.0	-		400W	
	Max. 330kgfcm Permissible Torque (Φ20, Φ25 Shaft)	For uniform loads Service Factor 1.0	-		100W	
	Max. 650kgfcm Permissible Torque (Φ20, Φ25 Shaft)	For uniform loads Service Factor 1.0	-		200W	
	Max. 1300kgfcm Permissible Torque (Φ25, Φ30 Shaft)	For uniform loads Service Factor 1.0	-		400W	

A Information

General Information

How to Read Motor Specifications

Model 9IDG*-120F□(-T): Gear Type Shaft 9IDD*-120F(-T): D-Cut Type Shaft 9IDK*-120F(-T): Key Type Shaft		Output	Voltage	Frequency	Poles	Duty	Starting Torque		Rated Load				Capacitor
Lead Wire Type	Terminal Box Type	W	V	Hz			kgfcm	N.m	Speed r/min	Current A	Torque kgfcm	Torque N.m	μF / VAC
9IDG1(A)-120F□	9IDG1(A)-120F□-T	120	1ø 110	60	4	Cont.	6.50	0.650	1600	2.00	7.31	0.731	25.0 / 250
9IDG2(D)-120F□	9IDG2(D)-120F□-T	120	1ø 220	60	4	Cont.	6.20	0.620	1600	1.04	7.31	0.731	6.0 / 450
9IDGE-120F□	9IDGE-120F□-T	120	1ø 220	50	4	Cont.	6.40	0.640	1250	0.90	9.35	0.935	6.0 / 450
			1ø 240				7.50	0.750		1.00	9.35	0.935	
9IDG3(G)-120F□	9IDG3(G)-120F□-T	120	3ø 220	50	4	Cont.	24.40	2.440	1300	0.88	8.99	0.899	–
				60			20.00	2.000	1600	0.71	7.31	0.731	
			3ø 230	50	4	Cont.	27.00	2.700	1350	0.86	8.66	0.866	
				60			21.70	2.170	1600	0.76	7.31	0.731	
9IDG4(K)-120F□	9IDG4(K)-120F□-T	120	3ø 380	50	4	Cont.	24.30	2.430	1300	0.50	8.99	0.899	–
				60			19.90	1.990	1600	0.41	7.31	0.731	
			3ø 400	50	4	Cont.	27.10	2.710	1350	0.49	8.66	0.866	
				60			21.90	2.190	1600	0.43	7.31	0.731	
9IDG5(L)-120F□	9IDG5(L)-120F□-T	120	3ø 415	50	4	Cont.	24.30	2.430	1300	0.47	8.99	0.899	–
				60			19.90	1.990	1600	0.37	7.31	0.731	
			3ø 440	50	4	Cont.	27.50	2.750	1350	0.47	8.66	0.866	
				60			22.20	2.220	1600	0.40	7.31	0.731	

① Output: The amount of work that can be performed in a given period of time. It can be used as a criterion for motor capability.
② Starting Torque: This term refers to the torque generated the instant the motor starts. If the motor is subjected to a friction load smaller than this torque, it will operate.
③ Speed: This is the speed of the motor when the motor is producing rated torque.
④ Current: Rated current is the current flowing in an electrical device when it is supplied with the rated voltage and delivers its rated power.
⑤ Torque: This is the torque created when the motor is operating most efficiently. Though the maximum torque is far greater, rated torque should, from the standpoint of utility, be the highest torque.

How to Read Gearbox Specifications

60Hz

Motor Model	Gearbox Model	Gear Ratio	2	3	3.6	5	6	7.5	9	12.5	15	18	20
		❷ r/min	900	600	500	360	300	240	200	144	120	100	90
9IDG□-60FP	9PBK□BH 9PFK□BH	❶ kgfcm	7.0	10.5	12.5	17.4	20.9	26.1	31.4	39.4	47.3	56.7	57.1
		N.m	0.68	1.02	1.23	1.71	2.05	2.56	3.07	3.86	4.63	5.56	5.60
9IDG□-60FH	9HBK□BH 9HFK□BH	kgfcm	–	10.5	12.5	–	20.9	–	31.4	39.4	47.3	56.7	57.1
		N.m		1.02	1.23		2.05		3.07	3.86	4.63	5.56	5.60

Motor Model	Gearbox Model	Gear Ratio	25	30	36	40	50	60	75	90	100	120	150	180
		r/min	72	60	50	45	36	30	24	20	18	15	12	10
9IDG□-60FP	9PBK□BH 9PFK□BH	kgfcm	71.4	85.7	102.8	114.2	142.8	171.4	192.2	200.0	200.0	200.0	200.0	200.0
		N.m	7.00	8.40	10.08	11.20	13.99	16.79	18.83	19.60	19.60	19.60	19.60	19.60
9IDG□-60FH	9HBK□BH 9HFK□BH	kgfcm	71.4	85.7	102.8	–	142.8	171.4	192.2	230.6	256.2	300.0	300.0	300.0
		❸ N.m	7.00	8.40	10.08		13.99	16.79	18.83	22.60	25.11	29.40	29.40	29.40

① Permissible Torque: It refers to the value of load torque driven by the gearbox's output shaft. Each value is shown for the corresponding gear ratio.
② r/min: This refers to the speed of rotation at the gearbox output shaft. Speed(r/min), depending on gear ratio, is shown in the permissible torque table when the gearbox is attached. The speed is calculated by dividing the motor's synchronous speed (50Hz :1,500r/ min, 60Hz:1,800r/min) by the gear ratio. The actual speed, according to the load condition, is 2~20% less than the displayed value.
③ Direction of Rotation: This refers to the direction of rotation viewed from the output shaft. The colored background areas indicate rotation in the same direction as the motor shaft, while the others rotate in the opposite direction. The direction of gearbox shaft rotation may differ from motor shaft rotation depending on the gear raoti of the gearbox.

Permissible Load Inertia

'J' and 'GD²' are used to describe the moment of inertia. J is generally called inertia and has the same value of physical moment of inertia in SI units. Unit is in kg · m². GD² is called 'flywheel effect' and generally used in industrial application with gravitational systems of units. Unit is in kgf · m² or kgf · cm². A relation between J and GD² is described as:
J = GD²/ 4

Calculation of Permissible Load Inertia

When the load inertia J connected to the gearbox is large, frequent start of the motor or electromagnetic brake generates a large torque. If this impact is excessive, it may damage the gearbox and the motor. Inertia varies with types of the load and the inertia of the load significantly affects life expectancy of gear and electromagnetic brake. When applying the braking force by using the electromagnetic brake, do not exceed a permissible load inertia for specific models.

- Permissible Load Inertia at Motor Shaft

$$J_M = J_G \times \frac{1}{i^2}$$

J_G : Permissible load inertia at the gearbox output shaft (kg · cm²)
J_M : Permissible load inertia at the motor output shaft (kg · cm²)
i : Gear reduction ratio (e.g. 5 if the ratio is 1/5)

- Permissible Load Inertia Moment at the Gearbox Output Shaft

J_G = JM x i² (when reduction ratio is 1/3 to 1/50)
J_G = JM x 2500 (when reduction ratio is 1/60 or larger)

J_G : Permissible load inertia moment at the gearbox output shaft (kg · cm²)
J_M : Permissible load inertia at the motor shaft (kg · cm²)
i : Gear reduction ratio (e.g. 5 if the ratio is 1/5)

Motor and Load Inertia

The equation of motion is described as below when the inertia loads is driven by the motor.

$$T = J\alpha = J \cdot \frac{d\omega}{dt} = \frac{GD^2}{4} \cdot \frac{d\omega}{dt} = \frac{2\pi}{60} \cdot \frac{GD^2}{4} \cdot \frac{dn}{dt}$$

T : Torque (N · m)
J : Moment of inertia (kg · m²)
ω : Angular speed (rad/s)
t : Time (s)
n : Rotational speed (r/s)
GD² : Flywheel Effect (GD² = 4J)
g : Gravitational acceleration (9.8m/s²)
α : Angular acceleration (rad/s²)

– In the case of an induction motor, the torque generated at the start varies depending on the speed. Therefore, an average acceleration torque is generally used, which is the average torque from the starting to the constant speed.
– A necessary average acceleration torque TA to accelerate the load inertia of J(kg · cm²)/ GD²(kgf · cm²) up to a speed n(min^–1) in time t(s) can be obtained by the following formula.

- SI Units

$$T_A = \frac{J}{9.55 \times 10^4} \times \frac{N}{t} \quad (N \cdot m)$$

- Gravitational System of Units

$$T_A = \frac{GD^2}{3750000} \times \frac{N}{t} \quad (kgf \cdot cm)$$

A Information

General Information

Calculation of Flywheel Effect (GD²)

Disk 	$GD^2 = \frac{1}{2} WD^2$ (kgf·cm²) W: Weight [kgf] D: Outer diameter [cm]	Hollow Circular Cylinder 	$GD^2 = \frac{1}{2} W(D^2 + d^2)$ (kgf·cm²) W: Weight [kgf] D: Outer diameter [cm] d : Inner diameter[cm]
Sphere 	$GD^2 = \frac{2}{5} WD^2$ (kgf·cm²) W : Weight [kgf] D : Diameter [cm]	Cube 	$GD^2 = \frac{1}{3} W(a^2 + b^2)$ (kgf·cm²) W: Weight [kgf] a,b : Length of side [cm]
Slender Round Bar 	$GD^2 = \frac{3D^2 + 4L^2}{12}$ (kgf·cm²) W : Weight [kgf] D : Diameter [cm] L : Length [cm]	Straight bar 	$GD^2 = \frac{4}{3} WL^2$ (kgf·cm²) W: Weight [kgf] L: Length [cm]
Discrete Shaft 	$GD^2 = \frac{1}{2} WD^2 + 4WS^2$ (kgf·cm²) W : Weight [kgf] D : Outer diameter [cm] S : Turning radius [cm]	Horizontal Linear Motion 	$GD^2 = WD^2$ (kgf·cm²) W : Weight on the conveyor [kgf] D : Drum diameter [cm] * GD² of drum is not included
Ball Screw 	$GD^2 = GD^2_A + \frac{W \cdot P^2}{\pi^2}$ (kgf·cm²) W: Weight [kgf] P: Lead of feed screw [cm] GD²A: GD² of feed screw [kgf · cm²]	Reducer 	Equivalent all GD²on axis 'a' $GD^2 = GD^2_1 + (\frac{n2}{n1})^2 GD^2_2$ (kgf·cm²) n1: Speed of axis 'a' [min^−1] n2: Speed of axis 'b' [min^−1] GD²1: GD² of axis 'a' [kgf · cm²] GD²2: GD² of axis 'b' [kgf · cm²]

Permissible Load Inertia at Motor Shaft

Frame Size	Output	Permissible Load Inertia GD² (kgfcm²)
□60mm	6W	0.25
□70mm	15W	0.56
□80mm	15W, 25W	1.24
□90mm	40W	3.00
	60W	4.40
	90W, 120W, 150W	4.40
	180W, 200W	6.00
□104mm	250W, 300W	8.40
	400W	11.00

Calculation Method of Motor Capacity

To calculate the load torque, refer to the figures below for reference. According to this, the proper size of a motor for your equipment is determined. Be advised that basic calculation methods refer to below. For sizing a motor, consider the acceleration time at the start, needed power, safety index in design, and the influence of voltage fluctuation.

Belt Conveyor Application

$$T = \frac{1}{2} D(F+\mu W) \ [kgf \cdot cm]$$

D : Diameter of drum [cm]
W : Weight [kgf]
μ : Friction coefficient
F : External force [kgf]

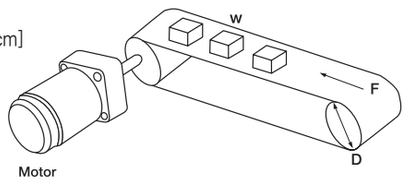

Hoisting Application

$$T = \frac{1}{2} D \cdot W \ [kgf \cdot cm]$$

D : Diameter of drum [cm]
W : Weight [kgf]



Flywheel Application

$$T = \frac{GD^2}{37500} \times \frac{N}{t} \ [kgf \cdot cm]$$

N : Revolutions per minute [r/min]
GD^2 : Flywheel effect [kgf • cm^2]
t : Time [sec]



Horizontal Travel on Contact Face

$$T = \frac{1}{2} D \cdot \mu W \ [kgf \cdot cm]$$

W : Weight [kgf]
μ : Friction coefficient
D : Diameter of wheel

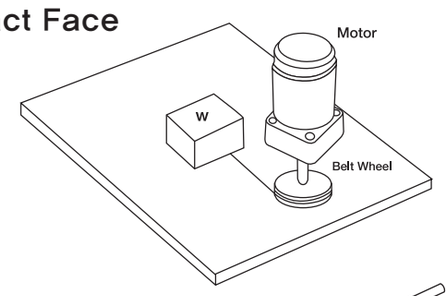

Ball Screw Drive

$$T = \frac{1}{2\pi} P \cdot (F+\mu W) \ [kgf \cdot cm]$$

F : External force [kgf]
W : Weight[kgf]
μ : Friction coefficient of sliding surfaces [approx. 0.05 to 0.2)]
P : LEAD of Ball Screw [cm]

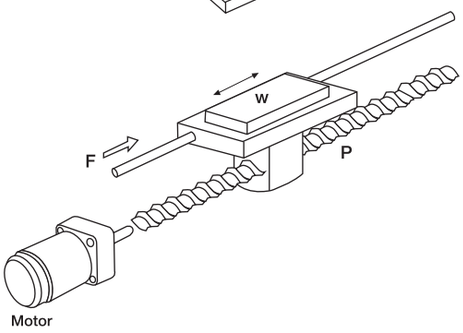

A Information

Terminology

Motor

Alternating Current (AC)

– Alternating current (AC) is an electric current which periodically reverses the direction and changes its magnitude at regular intervals or cycles. The alternating current follows a sine waveform where the voltage increases steadily from zero, rising to the maximum positive peak voltage. It then reverses and drops down through zero into negative direction until it reaches the negative peak value, which is equal to the positive in magnitude and only different in polarity.

Direct Current (DC)

– DC is the current coming from the power supply that positive (+) pole and negative (–) pole is constant all the times, and the direction is invariable and the size is also constant.
– DC generation device includes various rectifiers such as battery, storage battery, and DC generator.

Frequency (F)

– Frequency is the times of vibration that AC repeats for 1 second.
– The unit is Hertz (Hz).
– In Korea, 60Hz frequency is employed as a standard which means that the direction of current changes from (+) to (–) 60 times for a minute.

Rating

– This means what is designed to be suitable for the requirements specified in the motor and when satisfied with the use conditions, the use limit is called 'rating'.
– This designates voltage, current, r/min, frequency which determine the use limit for output. We call it rated output, rated voltage, rated current, rated r/min, and rated frequency.
– Rating includes continuous rating, short–time rating and intermittent periodic rating.

- **Continuous Rating**

– When using the motor continuously under the designated condition, if it is available to use it continuously without exceeding the prescribed temperature rising and general condition, it is called 'continuous rating'. (e.g. Induction Motor)

- **Short–time Rating**

– When operating the motor during the prescribed time under the designated condition, if it is available to use without exceeding the prescribed temperature rising and general condition, it is called 'short–time rating'. (e.g. Reversible Motor)

- **Intermittent Periodic Rating**

– When repeating run and stop periodically with constant load under the prescribed condition, if it is available not to exceed general condition such as the prescribed temperature rising etc., it is called 'intermittent periodic rating'.

Output

– Output is the thing which can be done by a motor during the unit time and it is determined by r/min x torque. The value of rated output is indicated as follows:

$$\text{Output [W]} = 1.027 \times T \times N$$

T: Torque [kgf · m]

N: Number of rotation [r/min]

– **Rated output:** It indicates the output which is generated continuously under the condition of designated voltage and frequency. This designated voltage and frequency is called the rated voltage and rated frequency. At this time, the rated output is called generally the output of the motor.

Torque and r/min

– Torque is the rotational force that can cause an object to rotate about an axis. The unit is [gf · cm] or [kgf · cm] and SI unit is N.m.
– The torque of 1kgf · cm is the rotational force when 1kg of force is applied to the right angle from the point of outer circle which radius of the body of revolution is 1cm.

● Starting Torque (① in figure 1)

– Staring torque is the minimum torque required to get it moving from a standstill and is called 'locked rotor torque' or 'starting torque'.
– If the torque is not greater than the starting torque, then the motor will not be able to get the system moving.

● Stalling Torque (② in figure 1)

– The maximum torque of the motor.
– The load more than maximum torque during operation causes the motor to rotate slower or makes it stop rotating.

● Rated Torque (③ in figure 1)

– It is the torque when the motor rotates at the rated r/min.
– The torque when the rated output is generated continuously by applying the rated voltage to the motor.

● Synchronous Speed (④ in figure 1)

– It is r/min which is determined by the power frequency and the number of poles of a motor.

NS=120f/P [r/min]

NS : Synchronous r/min [r/min]
P : The number of poles
f : Power frequency [Hz]
120 : Constant number
r/min : Revolution per minute

● No Load Speed (⑤ in figure 1)

– It is r/min when the motor runs without applying any load to motor output shaft.
In this case, the motor runs about 20~80[r/min] lower than synchronous r/min in Induction Motor and Reversible Motor.

● Rated Speed (⑥ in figure 1)

– It is r/min when rated r/min is generated by applying the rated load to the motor, and the most ideal r/min in use.

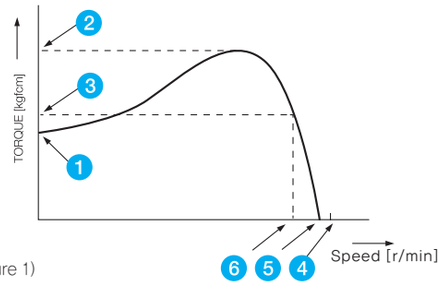

(Figure 1)

SPEED – TORQUE Characteristics

1. Starting Torque
2. Stalling Torque
3. Rated Torque
4. Synchronous Speed
5. No Load Speed
6. Rated Speed

Slippage

– Slippage can be described in the following formula as one of the rotational speed.

$$S = \frac{NS - N}{NS} \quad \text{or} \quad N = NS \times (1 - S)$$

NS : Synchronous r/min [r/min]
N : r/min at Temporary load [r/min]
S : SLIP

For example, if induction motor with 4 pole and 60Hz operates at SLIP S=0.1,

$$N = \frac{120 \times 60}{4} \times (1 - 0.1) = 1620 \text{[r/min]}$$

Permissible Torque

– It is the maximum torque available when operating the motor. This is limited by rated torque of the motor, temperature rising, and the strength of the gearbox to combine.

Overrun

– This is the angle (r/min) that indicates the excessive revolution of a motor from the moment of power shutdown to the stop.

Gearbox

Gear Reduction Ratio

– Gearbox is a speed converter using a gear and an instrumental device to reduce the r/min of motor into the required r/min and get bigger torque. Gear reduction ratio is a rate in which the gearbox decelerates the motor's r/min.
– There are two groups of gear reduction ratio; one is for 3, 5, 7.5, 12.5, 15··· and the other is 3.6, 6, 9, 15, 18··· which are 1.2 times the previous group so that you can obtain approx. the same output speed for both 50Hz and 60Hz.

Maximum Permissible Torque

– It is maximum load torque which can be applied to the output shaft of the gearbox.
– It is determined by the mechanical strength such as materials of a gearbox, gear tooth and bearing and the size of gearbox as well as the gear reduction ratio.

Transmission efficiency

– It is an efficiency with which motor torque is increased by a gearbox and described in %.
– It is determined by the bearing, friction of the gear tooth and resistance of lubricating oil.
– In general, this efficiency is approx. 90% per stage of the gear. If gear ratio is higher, the number of gear will increase and the efficiency rate will decrease.

Service Factor

– It is a coefficient which is used to estimate the service life of the gearbox.
– This value is generally derived from experience and based on type of the load and operating conditions.
– The life of a gearbox during particular application is estimated by dividing the standard life expectancy by the service factor.

Overhung Load

– Overhung load is defined as a load applied to the output shaft in the right-angle direction.
– Maximum value of the overhung load which is applicable to the shaft is called as 'permissible overhung load'. This value varies depending on the type of a gearbox and the distance from the edge of the shaft.

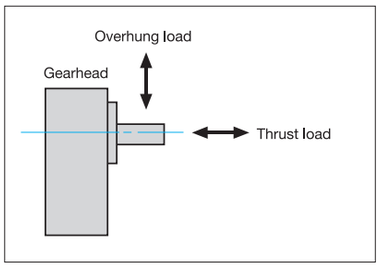

Thrust Load

– The thrust load is defined as a load applied to the output shaft in the axial direction.
– Maximum value of the thrust load which is applicable to the shaft is called as 'permissible thrust load'. This value varies depending on the type of a gearbox.

Caution for Using

Before using the motors and gearboxes, read safety precautions carefully and use the products properly.
For the suggestions on using them, they are classified as caution and warning

⚠ Caution

- Make sure to check whether the things are what you ordered. If you install the other thing, there may occur the injury and/or the fire.
- The motor and the controlling unit should be used only by the designated compounding. If not, the fire may occur.
- The motor should be used after it is fixed tightly. If not, the injury and/or the damage of the unit may occur.
- Make sure to check the rotating direction before connecting the machine. If not, the injury and/or the damage of the unit may occur.
- When using the ac motors for machines and beginning to operate, do it in a state of emergency stop.
- Use products only according to the specification of the motor and controlling unit. If not, there will be danger of fire, electric shock, injury and/or damage of the unit.
- Do not place any obstacle around the motor which can disturb circulation of air. It could be cause of overheating or breakdown.
- Do not put the fingers or things into the outlet of the unit. There may be electric shock, injury or danger of fire.
- Do not operate with the wet hands. The electric shock may occur.
- In case of moving a motor, do not catch the output shaft, connecting part, or lead wire. There may be the injury by the drop.
- Do not touch the rotating part (output shaft, cooling fan) in running. It could be cause of injury.
- Do not touch the side of the motor output shaft (key way, cutting part) with the naked hands. It could be cause of injury.
- Make sure to install the overload device because the protection device is not attached to the motor. It is desirable to install other protection devices other than overload protection device to prevent fire.
- Electromagnetic brake is not for holding the load certainly and it doesn't hold the load if thermal protector (TP) works. So if the safety brake is needed, install another braking system.
- If there are abnormal cases, turn off the power at once. If not, there will be the electric shock, injury and the damage.
- In operating and right after the operation, do not touch the controlling device by your hands or body. The fire will occur.
- When you scrap motors, please disassemble and treat them as industrial waste.

⚠ Warning

- Never put around the explosive atmosphere, gas to be burnt, corrosive air, the location to be wet, and combustibles. If not, there will be the electric shock and the fire.
- Do not move, connect or inspect with an electric current flowing. Turn off the power and work.
- Make sure to connect a motor and a speed controller based on the connection diagram. If not, there will be the electric shock and the fire.
- The power cable and the lead wire should not be bent, pulled and inserted by force. If not, the electric shock and the fire may occur.
- In case that the motor and controlling unit are attached to the machine, never touch with your hands or connect with the earth. Otherwise, an electric shock can occur.
- Never operate in the state of exposing the flowing current. If not, the electric shock can occur.
- In case of interruption of electric power and wiring the protection of overheat, please turn off the power. When motors are working continuously, there may be injury and damage of the unit.
- Within the 30 seconds after the power off, do not touch the output terminal of the controlling unit. If not, the electric shock may occur because of the residual volts.

AC/DC Geared Motor and Gearbox

AC Motors

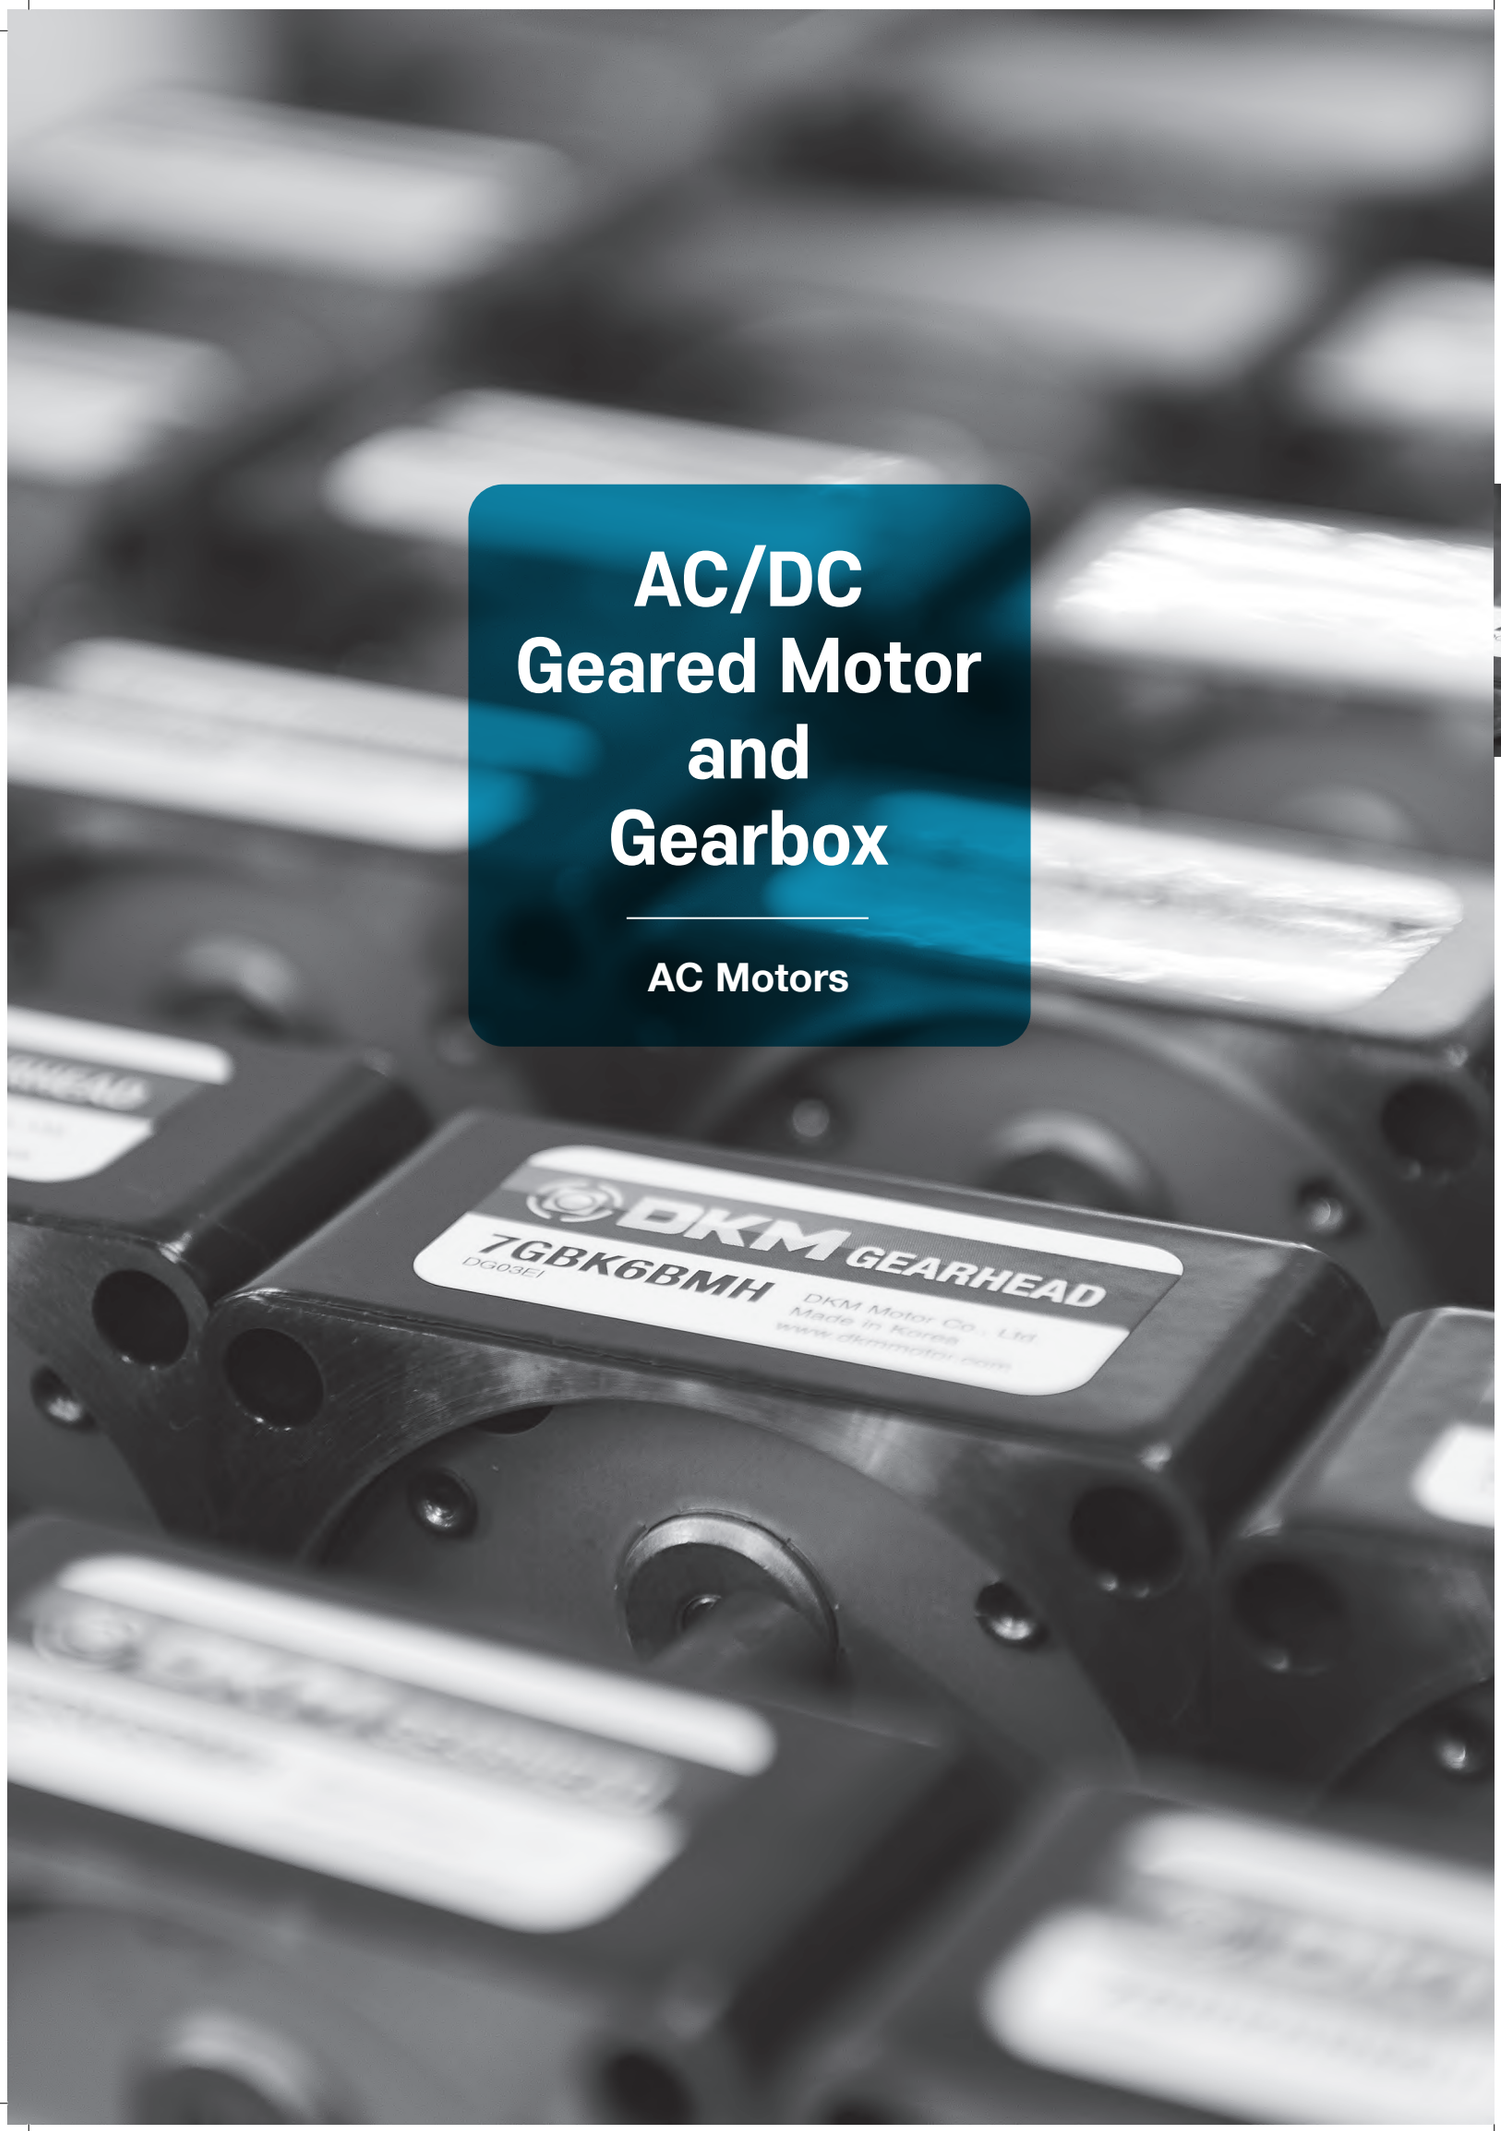

Contents

A Information

A-01 Product Coding System
A-04 Products Lineup
A-11 Combination table
A-15 General Information
A-19 Terminology
A-22 Caution for Use

B AC Motors

B-01 Technical Data of AC Motor
B-06 Induction Motor
B-58 2 Pole Motor
B-76 Reversible Motor
B-112 Brake Motor
B-162 Clutch & Brake Motor
B-178 Torque Motor
B-206 Speed Control System
- B-209 Speed Controller FX3000
- B-213 Speed Controller DX3000
- B-217 Speed Controller DSA
- B-219 Speed Controller DSKM
- B-224 Speed Control Induction Motor
- B-258 Speed Control Reversible Motor
- B-288 Speed Control Brake Motor
- B-322 Speed Control Clutch & Brake Motor

B-336 DSY Series

C DC Motors

C-01 Technical Data of DC Motor
C-04 DC Motor
C-20 Speed Controller DSD-90

D Gearboxes

D-01 Technical Data of Gearbox
D-07 Parallel Gearbox
D-13 Right-Angle Gearbox
D-18 Inter-decimal Gearbox

E Options

E-01 Mounting Bracket
E-03 Extension Cable
E-04 Output Flange
E-05 Output Shaft

B AC Motors

Technical Data of AC Motor

Definition of AC Motor

AC Motor is an electric motor to get a driving force for rotation or straight movement by converting the electrical energy into mechanical energy and the light-weighted motor which enables to select the model suitable for the load, has less noise and vibration as well as no exhaust pollution.

Features of DKM AC Motor

DKM AC geared motor was developed first in Korea in 1987 and has been used in a good reputation throughout the whole areas of domestic/overseas industry up to now.Our AC geared motor has various and wide range of options which satisfies various electrical requirements from all over the world.

Various and Abundant Models

- There are various and abundant models in frame size covering □60/70/80/90/104mm such as Induction Motor, 2 Pole Motor, Reversible Motor, E.M. Brake Motor, Clutch & Brake Motor, Torque Motor and Speed Control Motor.
- For use voltage, we have AC motors which have various types of voltage levels covering all areas in the globe: 100V 50/60Hz(Japan), 200V 50/60Hz(Japan), 110V 60Hz(Taiwan), 220V 60Hz(Korea, Taiwan), 115V 60Hz(North America), 230V 50Hz(Europe, Oceania), 220/240V 50Hz(South-East Asia)

Low Noise and Low Vibration

- Due to the enhancement of quality standard such as places and conditions for motors to use, the low noise and low vibration are required.
- To satisfy these conditions, we employed high precision of gear processing and skiving cutting method and we are making a rotor which is the root cause of vibration by verifying with balance machine for low noise and low vibration.

Easy to Use

- Easy and safe to use as motors and gearboxes are sold according to the requirements so that they can be designed and manufactured optimally.
- It is easy to drive to get a driving force by connecting a capacitor to the commercial power available to be used anywhere and anytime. As the capacitor is not needed for three phase power, it is available to get a driving force easily by connecting three phase power to the motor directly.

Just-In-Time System

- Just-In-Time system is available in DKM Motor Co., Ltd. for the best delivery system. DKM realized user's satisfaction with the world best delivery system.

Types of AC Motors

Classification by Power

- AC Motor: A motor that is operated by AC power. For example, inductive motor, synchronous motor, AC commutator motor, etc.

  1) Single Phase Motor
  - It works by using a single-phase power supply which is used mainly in homes, offices, stores and small non-industrial companies.
  - As power itself does not make a motor rotate, a capacitor needs to be connected to auxiliary coil to start.

  2) Three Phase Motor
  - Three phase motor stands for electrical power and it is consisted of three electrical sources with a phase offset of 120° in voltage.
  - Connect the power to the motor to start and the rotor will start to run easily.
  - The efficiency of a motor is high and the starting torque is relatively big.

- DC Motor: A motor that rotates by supplying the direct current to the armature. The torque generated by placing the coil between magnetic poles N and S and applying the current to this coil rotates the motor. Whenever this coil passes the neutral shaft, it turns the direction of current reversely and rotates continuously.

Classification by Function

- **Motor with Constant Speed**

  1) **Induction Motor**: An induction motor is a type of AC motor where power is supplied to the rotor by means of electromagnetic induction. These motors are widely used in industrial drives, particularly polyphase induction motors, because they are rugged and have no brushes. Their speed is determined by the frequency of the supply current, so they are most widely used in constant-speed applications, although variable speed versions, using variable frequency drives are becoming more common.

  2) **Reversible Motor**: The reversible motor is a kind of induction motor and also has the same characteristic in any direction such as a forward direction and backward direction. In principle, it is the same as an induction motor but there is no relation between the main coil and auxiliary coil like a general induction motor in order to stand frequent normal/reverse rotation and get a big starting torque.

- **Brake Motor**

  It is a motor embedded with fail-safe electromagnetic brake. Perfect braking enables to get a staying power.
  Brake runs only when the power is shutdown, so this is suitable for safe use.
  ※ DKM has 'A Type' electronic brake motor which runs when the power is applied. (Customized specification)

- **Clutch & Brake Motor**

  DKM Clutch&Brake motor is equipped with Clutch&Brake mechanism and only available to be used with a gearbox. As the continuously rotating induction motor and Clutch&Brake are combined, this can be used for frequent start/stop, position control, index operation and relative value feeding operation, etc.

- **Torque Motor**

  DKM torque motor has big starting torque and sloping characteristics. It runs safely over the whole area of rotation speed-torque characteristics. (Torque is highest at zero speed and decreases steadily with increasing speed.) With these characteristics, this can be used for more application as a winding or tension motor.

- **Speed Control Motor**

  Users can easily set and adjust the motor speed. There are four types of speed controllers for AC speed control motors. Select the best system depending on your application.

Structure of AC Motor

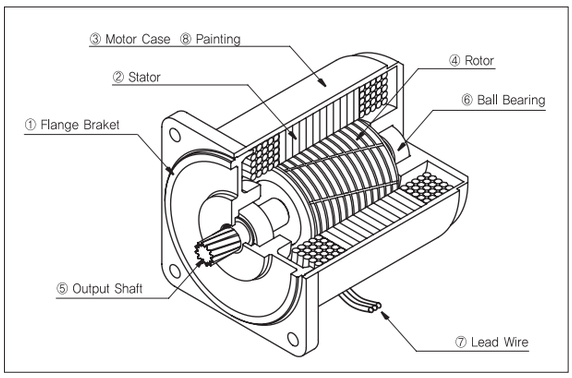

① Flange Bracket
Die-cast aluminum bracket is press-fitted into the motor case. The flange and the housing are a single body type which plays an important part to attach the motor alone or combine the gearbox.

② Stator
This is comprised of a stator core made from laminated silicon/steel plates, a polyester-coated copper coil and insulation film. The roles are to generate magnetic field, form the rotation and run the rotor.

③ Motor Case
Die-cast aluminum with a machined finish inside

④ Rotor
It is comprised of laminated silicon/steel plates with die-cast aluminum. Rotor plays the part to change the electric energy to mechanical energy and transfer it to outside through shaft.

⑤ Output Shaft
There are a D-cut type shaft and a key type shaft which are for use by the motor itself and a gear type shaft(pinion shaft) which is for attaching a gearbox. It is made of S45C with a machined finish.

⑥ Ball Bearing : It ensures that the rotor remains at the right position for the reliability and fast rotational motion.

⑦ Lead Wire : Lead wires with heat-resistant polyethylene coating

⑧ Painting : Motor housing is finished with acrylic resin and melamine resin.

Temperature Rise of AC Motor

Temperature Rise

- In operation of a motor, the loss inside of the motor is changed to heat causing the motor's temperature to rise.
  - Induction Motor (for continuous duty) reaches the saturation point of temperature rise in about two or three hours of operation and temperature stabilizes.
  - Reversible Motor (30 minutes rating) reaches their limit of temperature rise in about 30 minutes of operation. If operation continues as it is, the temperature will increase further.

Measuring Temperature Rise

- DKM uses the following methods for temperature measurement and for the determination of a motor's allowable temperature rise.
  - Thermometer Method: The temperature rise at which the temperature rise becomes saturated during motor operation is measured by using a thermometer or thermocouple installed in the center of the motor case. The temperature rise is the difference between the ambient temperature and measured temperature during motor operation.
  - Resistance Method: This is the method of measuring the winding temperature according to the change in resistance value. The motor's winding resistance and ambient temperature are measured by using a resistance meter and thermostat.

Overheating Protection Device

- If a running motor locks due to overload, the input current increases due to any reason or the ambient temperature increases suddenly, the motor's temperature rises abruptly. If this state continues, the insulation performance may deteriorate and, in extreme cases, it may cause a fire. To avoid this case, DKM employs the following overheating protection devices.
  - Thermal Protector (TP)
    DKM installs the thermal protector for overheating protection of the motor. The TP employs a bimetal contact with pure silver used in the contacts. Pure silver has the lowest electrical resistance of all materials and has thermal conductivity second only to copper. (Operating Temperature: Open 120℃±5℃ / Close 90 ℃±5℃)
  - Impedance Protection
    Impedance-protected motor has higher impedance in the motor windings so although the motor locks, the increase in input current is minimized and temperature will not rise.

Insulation Class

- DKM Motor's insulation class is B class. Insulation class is according to heat-resistance class. According to JIS C4003(IEC60085), it is defined as below. It is also available to use other materials for some particular insulation class according to operating conditions or user's request. (Customized specification)

Insulation Class	Max. Permissible Temp.
Y	90℃
A	105℃
E	120℃
B	130℃
F	155℃
H	180℃

FAN

- It is available to attach two kinds of fan to the DKM's motor; 'General Fan (F type)' and 'Powerful Fan (F2 type)'. General fan is attached to a motor shaft rotating at the same speed with motor shaft speed(1,800r/min in 60Hz, 1,500r/min in 50Hz). Powerful fan makes powerful cooling performance and rotates in high speed regardless of motor shaft speed (It rotates 3200r/min at 60Hz and exhibits the effect of a 10℃ higher temperature reduction than when using the general fan.).
  DKM employs general fans to the motors with continuous speed. Also, the continuous-speed motor with a powerful fan could be customized. But in case of using a speed control motor, the powerful fan is employed basically because there is little cooling effect in low speed if general fan is employed.

Equipment Protection Structure (IP Code)

- The IP code is one of the equipment protection structures and indicates the dust-resistance and waterproofing degrees of protection for the equipment.
- The code consists of the first number and the second number.

I P □ □

Second Number : Waterproof Protection Class
First Number : Dustproof Protection Class

- "□" is used when one of the two protection classes is not specified in the name. (e.g. IP□5, IP4□)
- Meanings of IP code and testing conditions are as below;

1) The Classification of Dustproof

IP Code	Protection Specifications for Dustproof	
First Number	Protection Level	Test Condition
IP0□	None	None
IP1□	Protection against approach by hands	Solid objects with a diameter of 50mm or more do not enter.
IP2□	Protection against approach by fingers	Solid objects with a diameter of 12mm or more do not enter.
IP3□	Protection against tips of tools, etc.	Solid objects with a diameter of 2.5mm or more do not enter.
IP4□	Protection against ingress of wires, etc.	Solid objects with a diameter of 1.0mm or more do not enter.
IP5□	Protection against powdery dust	Powdery dust that may inhibit normal operation does not enter.
IP6□	Completely dustproof design	Cannot be penetrated by powdery dust.

2) The Classification of Waterproof

IP Code	Protection Specifications for Waterproof	
Second Number	Protection Level	Test Condition
IP□0	None	None
IP□1	Protection against vertically falling water drops	Water drops at a rate of 3 to 5L/min. for 10 minutes from a height of 200mm
IP□2	Protection against vertically falling water drops when enclosure tilted up to 15°	Water drops at a rate of 3 to 5L/min. for 10 minutes from directions within 15° from a height of 200mm
IP□3	Protection against spraying water 60° from vertical	Sprayed water at a rate of 10L/min. for 10 minutes from directions within 60° from a height of 200mm
IP□4	Protection against water sprayed from all directions	Sprayed water at a rate of 10L/min. for 10 minutes from all directions at a distance of 300 to 500mm
IP□5	Protection against water jet from all directions	Sprayed water jet of 30kPa at a rate of 12.5L/min. for 3 minutes from all directions at a distance of 3m
IP□6	Protection against strong water jet such as ocean waves	Sprayed water jet of 100kPa at a rate of 100L/min. for 3 minutes from all directions at a distance of 3m
IP□7	Usable after immersion in water under specified conditions	Immersion to a depth of 1m for 30 minutes
IP□8	Usable under water	Determined through cooperation between a user and a manufacturer.

Earth Method

Lead Wire Type

- As shown in the figure, connect the earth wire to the earth hole in the side of the motor. Screw the earth wire to the earth hole. (Sequence: earth hole → washer → earth wire → screw bolt)



Terminal Box Type

- Connect the earth wire to the earth terminal in the terminal box.



Induction Motor

Index

Outline of Induction Motor	B-07
Induction Motor 6W (□60mm)	B-09
Induction Motor 6W (□70mm)	B-11
Induction Motor 10W (□70mm)	B-13
Induction Motor 15W (□70mm)	B-15
Induction Motor 15W (□80mm)	B-17
Induction Motor 25W (□80mm)	B-20
Induction Motor 40W (□80mm)	B-23
Induction Motor 40W (□90mm)	B-25
Induction Motor 60W (□90mm)	B-28
Induction Motor 90W (□90mm)	B-32
Induction Motor 120W (□90mm)	B-36
Induction Motor 150W (□90mm)	B-40
Induction Motor 180W (□90mm)	B-43
Induction Motor 200W (□90mm)	B-46
Induction Motor 250W (□104mm)	B-49
Induction Motor 300W (□104mm)	B-52
Induction Motor 400W (□104mm)	B-55

B AC Motors

Outline of Induction Motor

Suitable for Unidirectional Continuous Operation

- Induction motors are suitable for unidirectional continuous operation such as conveyor belt system.

Single Phase Run

- For the running of a single phase motor, please use the capacitor complying with the capacity of the motor. For a single phase induction motor, it is not possible to reverse the direction within a short time during operation. So stop the motor first and change the direction next. (Figure 1)

Three Phase Run

- Three phase induction motor has relatively high starting torque compared to single phase motor and has high reliability because it can be directly operated by a three phase power source.(Figure2)

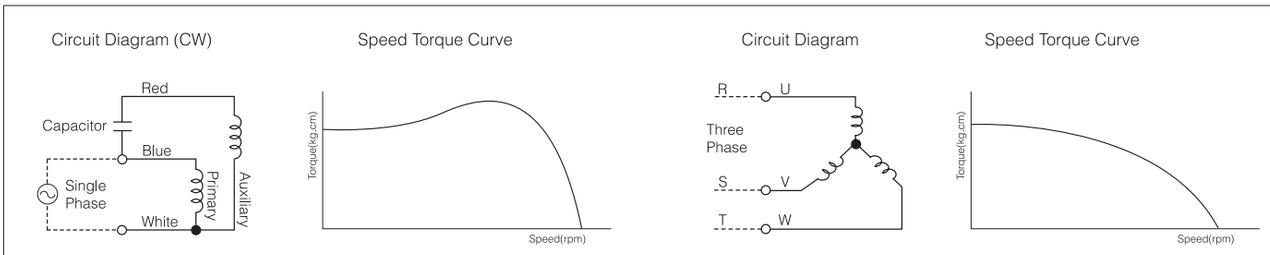

(Figure 1) (Figure 2)

The Relation between Speed and Torque

- In a condition of constant power voltage, the relation between speed and torque is like next figure. Under the condition of no-load, the number of rotation is roughly same as the number of synchronous rotation. But if the load increases, the number of rotation decreases and approaches to the speed (r/min) indicated by the point P where the torque Tp horizontally meets the load curve. When the load further increases and reaches the point M, the motor stops at the point R because the motor no longer generates further torque. Therefore, the leg R-M is referred to as an unstable zone and the leg O-M is a stable zone for operation.

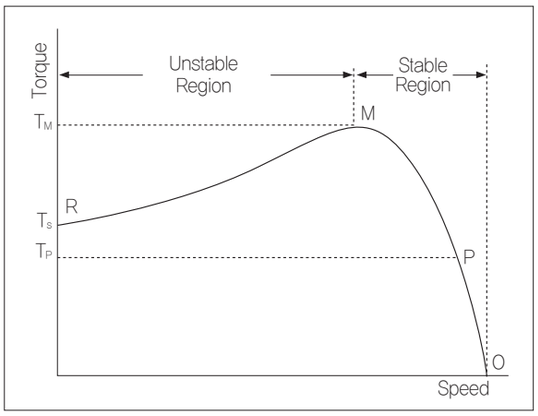

Features of Voltage and Capacitor

- Generally the torque of induction motor changes proportionate to twice the voltage and it also changes according to the capacity of the capacitor. If the capacity of the capacitor increases, the starting torque and rated torque will increase. But if the capacity increases by over twice, the rated torque decreases and starting torque do not increase.
- If the induction motor has a slight lack of torque, it is possible to increase the torque by increasing the voltage or the capacity of the capacitor to continue the operation. But please be informed that in this case the loss input of the motor increases and the temperature rises rapidly. However, if the motor must be run with insufficient torque, take measures to let the motor release heat as much as possible by installing separate fan as an example and operate the motor while keeping the temperature of the motor's housing below 90℃.

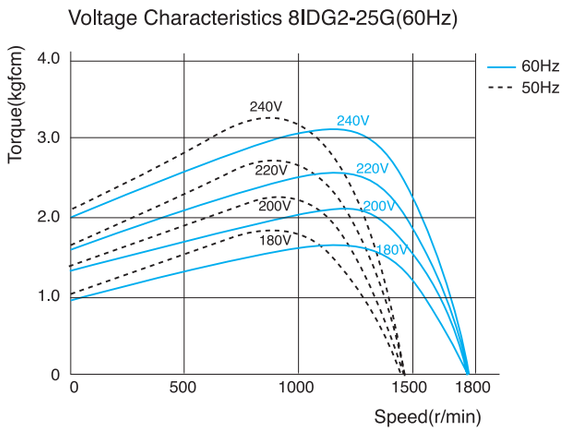

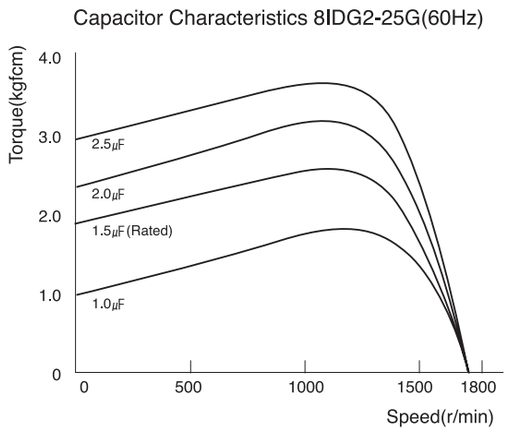

General Specifications

Item	Specification
Insulation Resistance	100MΩ or more when DC500V MEGA is applied between the windings and the frame after rated motor operation under normal ambient temperature and humidity.
Dielectric Strength	Sufficient to withstand 1.5KV at 50Hz and 60Hz applied between the windings and the frame for 1 minute after rated motor operation under normal ambient temperature and humidity.
Temperature Rise	Temperature rise of windings are 80℃ or less measured by the resistance change method after rated motor operation with connecting a gearbox or equivalent heat radiation plate.
Insulation Class	Class B [130℃]
Overheat Protection	Operating temperature (Built-in thermal protector type motor): Open 120℃±5℃, Close 90℃±5℃
Ambient Temperature	-10℃~+40℃ (Three phase 220VAC: -10℃~+50℃)
Ambient Humidity	85% maximum

Connection Diagrams

Lead Wire Type	Terminal Box Type

[Single Phase]





[Three Phase]



* **CCW Direction:** Change any two connections among R, S and T.

[Single Phase]





[Three Phase]



* **CCW Direction:** Change any two connections among R, S and T.

B AC Motors

Induction Motor 6W(□60mm)

6W Induction Motor 6W(□60mm)

Motor Specification

Model 6IDG*-6G(-T): Gear Type Shaft 6IDD*-6(-T): D-Cut Type Shaft		Output	Voltage	Frequency	Poles	Duty	Starting Torque		Rated Load				Capacitor
Lead Wire Type	Terminal Box Type	W	V	Hz			kgfcm	N.m	Speed r/min	Current A	Torque kgfcm	Torque N.m	μF / VAC
6ID◇1(A)-6□	6ID◇1(A)-6□-T	6	1ø 110	60	4	Cont.	0.54	0.054	1550	0.21	0.38	0.038	2.5 / 250
6ID◇B-6□	6ID◇B-6□-T	6	1ø 100	50	4	Cont.	0.57	0.057	1250	0.22	0.47	0.047	3.0 / 250
				60			0.54	0.054	1550	0.21	0.38	0.038	
6ID◇C-6□	6ID◇C-6□-T	6	1ø 200	50	4	Cont.	0.58	0.058	1250	0.11	0.47	0.047	0.8 / 450
				60			0.60	0.060	1550	0.11	0.38	0.038	
6ID◇2(D)-6□	6ID◇2(D)-6□-T	6	1ø 220	60	4	Cont.	0.60	0.060	1550	0.11	0.38	0.038	0.7 / 450
6ID◇E-6□	6ID◇E-6□-T	6	1ø 220	50	4	Cont.	0.55	0.055	1200	0.09	0.49	0.049	0.6 / 450
			1ø 240				0.66	0.066		0.10	0.49	0.049	
6ID◇3(G)-6□	6ID◇3(G)-6□-T	6	3ø 220	50	4	Cont.	1.20	0.120	1250	0.13	0.47	0.047	–
				60			0.90	0.090	1550	0.11	0.38	0.038	
			3ø 230	50	4	Cont.	1.30	0.130	1250	0.14	0.47	0.047	
				60			1.00	0.100	1550	0.12	0.38	0.038	

1) Enter the phase & voltage code in the place * within the motor model name. 2) Enter the output shaft type of motor in the place ◇ (G: Gear Type / D: D-Cut Type) and D-Cut Type Shaft is for using the motor only. 3) If the motor output shaft type is Gear Type, □ contains the model type name of the gearbox being attached. 4) Impedance Protected Type

Max. Permissible Torque at Output Shaft of Gearbox

60Hz

Motor Model	Gearbox Model	Gear Ratio	3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120	150	180
		r/min	600	500	360	300	240	200	180	144	120	100	90	72	60	50	45	36	30	24	20	18	15	12	10
6IDG*-6G	6GBD□MH	kgfcm	0.9	1.1	1.5	1.8	2.3	2.7	3.1	3.8	4.6	5.5	5.5	6.9	8.3	9.9	11.0	12.4	14.9	18.7	22.4	24.9	30.0	30.0	30.0
		N.m	0.09	0.11	0.15	0.18	0.22	0.27	0.30	0.37	0.45	0.54	0.54	0.67	0.81	0.97	1.08	1.22	1.46	1.83	2.19	2.44	2.94	2.94	2.94

Motor Model	Gearbox Model	Gear Ratio	200	250
		r/min	9	7.2
6IDG*-6G	6GBD□MH	kgfcm	30.0	30.0
		N.m	2.94	2.94

50Hz

Motor Model	Gearbox Model	Gear Ratio	3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120	150	180
		r/min	500	417	300	250	200	166	150	120	100	83	75	60	50	41	37	30	25	20	16	15	12	10	8
6IDG*-6G	6GBD□MH	kgfcm	1.2	1.4	2.0	2.4	3.0	3.6	3.9	4.9	5.9	7.1	7.1	8.9	10.7	12.8	14.2	16.1	19.3	24.1	28.9	30.0	30.0	30.0	30.0
		N.m	0.12	0.14	0.19	0.23	0.29	0.35	0.39	0.48	0.58	0.70	0.70	0.87	1.05	1.25	1.39	1.57	1.89	2.36	2.83	2.94	2.94	2.94	2.94

Motor Model	Gearbox Model	Gear Ratio	200	250
		r/min	7.5	6
6IDG*-6G	6GBD□MH	kgfcm	30.0	30.0
		N.m	2.94	2.94

1) Enter the phase & voltage code in the place * within the motor model name. 2) Enter the gear ratio in the place of □ within the gearbox model name. 3) A colored background indicates the gear shaft rotation in the same direction as the motor shaft; a white background indicates the rotation in the opposite direction.
4) The rotating speed is calculated by dividing the motor's synchronous speed (50Hz: 1,500r/min, 60Hz: 1,800r/min) by the gear ratio. The actual speed is 2~20% less than the displayed value, depending on the size of the load.

Motor Images

6IDD□-6	6IDD□-6-T	6IDG□-6G+6GBD□MH

Dimensions

MOTOR ONLY

● MOTOR MODEL: 6ID□□-6(-T) (NO FAN)

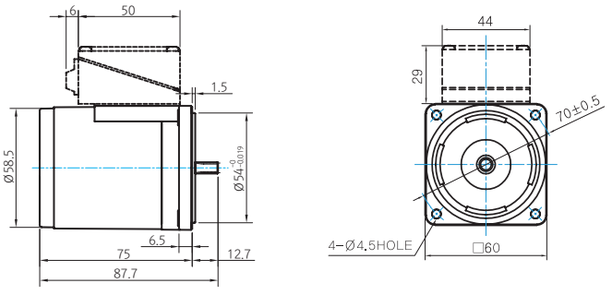

● MOTOR OUTPUT SHAFT

MODEL	SPEC
D-CUT TYPE	
6IDD□-6	

GEARED MOTOR

G TYPE GEARBOX

● MOTOR MODEL:
6IDG□-6G (NO FAN)



● GEARBOX MODEL:
6GBD□MH



● GEARBOX OUTPUT SHAFT

MODEL	SPEC
KEY TYPE	
6GBD□MH	

● 30(41)-Table1

SIZE(mm)	GEAR RATIO
30	6GBD3MH - 6GBD18MH
41	6GBD20MH - 6GBD250MH

WEIGHT

PART		WEIGHT(kg)
MOTOR		0.70
GEAR BOX	6GBD3MH - 6GBD18MH	0.30
	6GBD20MH - 6GBD40MH	0.32
	6GBD50MH - 6GBD250MH	0.34

*The output flange and shaft are sold separately.

Connection Diagrams

Lead Wire Type

[Single Phase]





[Three Phase]



* **CCW Direction:**
Change any two connections among R, S and T.

INPUT \ LEAD WIRE	U	V	W
3Φ 200V-230V (3, G, J)	WHITE	RED	BLACK
3Φ 380V-400V (4, K)	WHITE	BLUE	BLACK
3Φ 415V-440V (5, L)	WHITE	YELLOW	BLACK

Terminal Box Type

[Single Phase]





[Three Phase]



* **CCW Direction:**
Change any two connections among R, S and T.

INPUT \ LEAD WIRE	U	V	W
3Φ 200V-230V (3, G, J)	WHITE	RED	BLACK
3Φ 380V-400V (4, K)	WHITE	BLUE	BLACK
3Φ 415V-440V (5, L)	WHITE	YELLOW	BLACK

1) The direction of motor rotation is as viewed from the shaft end of the motor.
2) CW represents the clockwise direction, while CCW represents the counterclockwise direction.
3) Change the direction of single phase motor rotation only after bringing the motor to a stop. If an attempt is made to change the direction of rotation while the motor is rotating, the motor may ignore the reversing command or change its direction after some delay.

B AC Motors

Induction Motor 6W(□70mm)

6W Induction Motor 6W(□70mm)

Motor Specification

Model 7IDG*-6G(-T): Gear Type Shaft 7IDD*-6(-T): D-Cut Type Shaft		Output	Voltage	Frequency	Poles	Duty	Starting Torque		Rated Load				Capacitor
Lead Wire Type	Terminal Box Type	W	V	Hz			kgfcm	N.m	Speed r/min	Current A	Torque kgfcm	Torque N.m	μF / VAC
7ID◇1(A)-6□	7ID◇1(A)-6□-T	6	1ø 110	60	4	Cont.	0.50	0.050	1600	0.26	0.37	0.037	2.5 / 250
7ID◇B-6□	7ID◇B-6□-T	6	1ø 100	50	4	Cont.	0.55	0.055	1300	0.28	0.45	0.045	3.0 / 250
				60			0.52	0.052	1600	0.24	0.37	0.037	
7ID◇C-6□	7ID◇C-6□-T	6	1ø 200	50	4	Cont.	0.53	0.053	1300	0.17	0.45	0.045	0.8 / 450
				60			0.49	0.049	1600	0.14	0.37	0.037	
7ID◇2(D)-6□	7ID◇2(D)-6□-T	6	1ø 220	60	4	Cont.	0.52	0.052	1600	0.15	0.37	0.037	0.7 / 450
7ID◇E-6□	7ID◇E-6□-T	6	1ø 220	50	4	Cont.	0.56	0.056	1300	0.14	0.45	0.045	0.7 / 450
			1ø 240				0.67	0.067		0.16	0.45	0.045	

1) Enter the phase & voltage code in the place * within the motor model name.
2) Enter the output shaft type of motor in the place ◇ (G: Gear Type / D: D-Cut Type) and D-Cut Type Shaft is for using the motor only.
3) If the motor output shaft type is Gear Type, □ contains the model type name of the gearbox being attached.
4) The phase & voltage code A, B, C, D, E contain a built-in thermal protector.

Max. Permissible Torque at Output Shaft of Gearbox

60Hz

Motor Model	Gearbox Model	Gear Ratio	3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120	150	180
		r/min	600	500	360	300	240	200	180	144	120	100	90	72	60	50	45	36	30	24	20	18	15	12	10
7IDG*-6G	7GBK□BMH	kgfcm	0.9	1.1	1.5	1.8	2.2	2.7	3.0	3.7	4.4	5.3	5.3	6.7	8.0	9.6	10.7	12.1	14.5	18.1	21.7	24.1	28.9	36.2	43.4
		N.m	0.09	0.10	0.14	0.17	0.22	0.26	0.29	0.36	0.43	0.52	0.52	0.65	0.78	0.94	1.05	1.18	1.42	1.77	2.13	2.36	2.83	3.54	4.25

Motor Model	Gearbox Model	Gear Ratio	200
		r/min	9
7IDG*-6G	7GBK□BMH	kgfcm	48.2
		N.m	4.72

50Hz

Motor Model	Gearbox Model	Gear Ratio	3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120	150	180
		r/min	500	417	300	250	200	167	150	120	100	83	75	60	50	42	38	30	25	20	17	15	12.5	10	8
7IDG*-6G	7GBK□BMH	kgfcm	1.1	1.3	1.8	2.2	2.7	3.3	3.6	4.6	5.5	6.6	6.6	8.2	9.8	11.8	13.1	14.8	17.8	22.3	26.7	29.7	35.6	44.5	50.0
		N.m	0.107	0.13	0.18	0.21	0.27	0.32	0.36	0.45	0.54	0.64	0.64	0.80	0.96	1.16	1.29	1.45	1.74	2.18	2.62	2.91	3.49	4.36	4.90

Motor Model	Gearbox Model	Gear Ratio	200
		r/min	7.5
7IDG*-6G	7GBK□BMH	kgfcm	50.0
		N.m	4.90

1) Enter the phase & voltage code in the place * within the motor model name.
2) Enter the gear ratio in the place of □ within the gearbox model name.
3) A colored background indicates the gear shaft rotation in the same direction as the motor shaft : a white background indicates the rotation in the opposite direction.
4) The rotating speed is calculated by dividing the motor's synchronous speed (50Hz: 1,500r/min, 60Hz: 1,800r/min) by the gear ratio. The actual speed is 2~20% less than the displayed value, depending on the size of the load.

Motor Images

7IDD□-6	7IDD□-6-T	7IDG□-6G+7GBK□BMH

Dimensions

MOTOR ONLY

● MOTOR MODEL : **7ID□□-6 (-T) (NO FAN)**

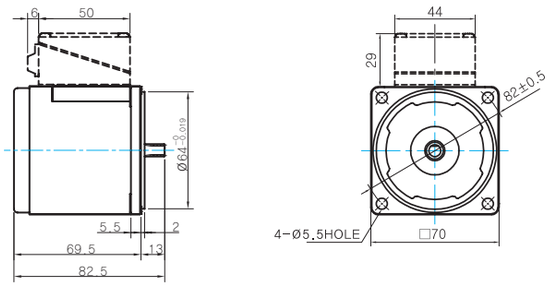

● MOTOR OUTPUT SHAFT

MODEL	SPEC
D-CUT TYPE	
7IDD □-6	

GEARED MOTOR

G TYPE GEARBOX

● MOTOR MODEL : **7IDG□-6G(NO FAN)**

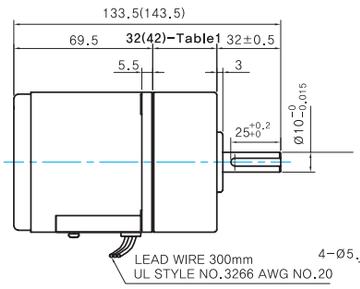

● GEARBOX MODEL : **7GBK□BMH**



● GEARBOX OUTPUT SHAFT

MODEL	SPEC
KEY TYPE	
7GBK□BMH	

● KEY SPEC

GEARBOX


WEIGHT

PART		WEIGHT(kg)
MOTOR		0.83
GEAR BOX	7GBK3BMH - 7GBK18BMH	0.38
	7GBK20BMH - 7GBK40BMH	0.48
	7GBK50BMH - 7GBK200BMH	0.53

*The output flange and shaft are sold separately.

● 32(42)-Table1

SIZE(mm)	GEAR RATIO
32	7GBK3BMH - 7GBK18BMH
42	7GBK20BMH - 7GBK200BMH

Connection Diagrams

Lead Wire Type	Terminal Box Type
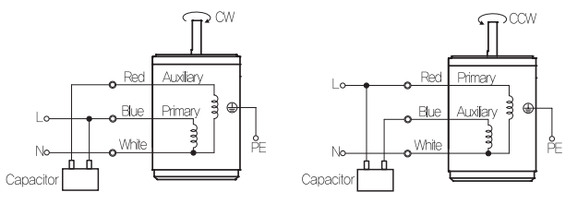	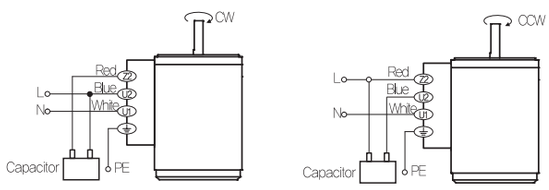

1) The direction of motor rotation is as viewed from the shaft end of the motor.
2) CW represents the clockwise direction, while CCW represents the counterclockwise direction.
3) Change the direction of single phase motor rotation only after bringing the motor to a stop. If an attempt is made to change the direction of rotation while the motor is rotating, the motor may ignore the reversing command or change its direction after some delay.

B AC Motors

Induction Motor 10W(□70mm)

10W Induction Motor 10W(□70mm)

Motor Specification

Model 7IDG*-10G(-T): Gear Type Shaft 7IDD*-10(-T): D-Cut Type Shaft		Output	Voltage	Frequency	Poles	Duty	Starting Torque		Rated Load				Capacitor
Lead Wire Type	Terminal Box Type	W	V	Hz			kgfcm	N.m	Speed r/min	Current A	Torque kgfcm	Torque N.m	μF / VAC
7ID◇1(A)-10□	7ID◇1(A)-10□-T	10	1ø 110	60	4	Cont.	0.58	0.058	1550	0.29	0.63	0.063	3.0 / 250
7ID◇B-10□	7ID◇B-10□-T	10	1ø 100	50	4	Cont.	0.68	0.068	1200	0.31	0.81	0.081	3.5 / 250
				60			0.65	0.065	1550	0.27	0.63	0.063	
7ID◇C-10□	7ID◇C-10□-T	10	1ø 200	50	4	Cont.	0.69	0.069	1250	0.18	0.78	0.078	1.0 / 450
				60			0.66	0.066	1550	0.16	0.63	0.063	
7ID◇2(D)-10□	7ID◇2(D)-10□-T	10	1ø 220	60	4	Cont.	0.78	0.078	1550	0.18	0.63	0.063	1.0 / 450
7ID◇E-10□	7ID◇E-10□-T	10	1ø 220	50	4	Cont.	0.63	0.063	1200	0.16	0.81	0.081	0.8 / 450
			1ø 240				0.76	0.076		0.18	0.81	0.081	

1) Enter the phase & voltage code in the place * within the motor model name.
2) Enter the output shaft type of motor in the place ◇ (G: Gear Type / D: D-Cut Type). and D-Cut Type Shaft is for using the motor only.
3) If the motor output shaft type is Gear Type, □ contains the model type name of the gearbox being attached.
4) The phase & voltage code A, B, C, D, E contain a built-in thermal protector.

Max. Permissible Torque at Output Shaft of Gearbox

60Hz

Motor Model	Gearbox Model	Gear Ratio	3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120	150	180
		r/min	600	500	360	300	240	200	180	144	120	100	90	72	60	50	45	36	30	24	20	18	15	12	10
7IDG*-10G	7GBK□BMH	kgfcm	1.5	1.8	2.5	3.1	3.8	4.6	5.1	6.4	7.6	9.2	9.2	11.5	13.8	16.5	18.3	20.7	24.9	31.1	37.3	41.5	49.8	50.0	50.0
		N.m	0.15	0.18	0.25	0.30	0.37	0.45	0.50	0.62	0.75	0.90	0.90	1.12	1.35	1.62	1.80	2.03	2.44	3.05	3.66	4.06	4.88	4.90	4.90

Motor Model	Gearbox Model	Gear Ratio	200
		r/min	9
7IDG*-10G	7GBK□BMH	kgfcm	50.0
		N.m	4.90

50Hz

Motor Model	Gearbox Model	Gear Ratio	3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120	150	180
		r/min	500	417	300	250	200	167	150	120	100	83	75	60	50	42	38	30	25	20	17	15	12.5	10	8
7IDG*-10G	7GBK□BMH	kgfcm	2.0	2.4	3.3	3.9	4.9	5.9	6.6	8.2	9.9	11.8	11.9	14.8	17.8	21.3	23.7	26.8	32.1	40.2	48.2	50.0	50.0	50.0	50.0
		N.m	0.19	0.23	0.32	0.39	0.48	0.58	0.64	0.81	0.97	1.16	1.16	1.45	1.74	2.09	2.32	2.62	3.15	3.94	4.72	4.90	4.90	4.90	4.90

Motor Model	Gearbox Model	Gear Ratio	200
		r/min	7.5
7IDG*-10G	7GBK□BMH	kgfcm	50.0
		N.m	4.90

1) Enter the phase & voltage code in the place * within the motor model name.
2) Enter the gear ratio in the place of □ within the gearbox model name.
3) A colored background indicates the gear shaft rotation in the same direction as the motor shaft; a white background indicates the rotation in the opposite direction.
4) The rotating speed is calculated by dividing the motor's synchronous speed (50Hz: 1,500r/min, 60Hz: 1,800r/min) by the gear ratio.The actual speed is 2~20% less than the displayed value, depending on the size of the load.

Motor Images

7IDD□-10	7IDD□-10-T	7IDG□-10G+7GBK□BMH

Dimensions

MOTOR ONLY

● MOTOR MODEL : **7ID□□-10(-T)(NO FAN)**

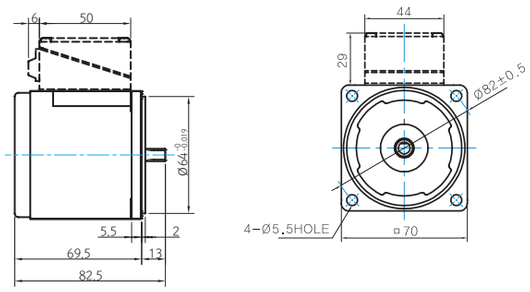

● **MOTOR OUTPUT SHAFT**

MODEL	SPEC
D-CUT TYPE	
7IDD□-10	

GEARED MOTOR

G TYPE GEARBOX

● MOTOR MODEL : **7IDG□-10G(NO FAN)**

● GEARBOX MODEL : **7GBK□BMH**

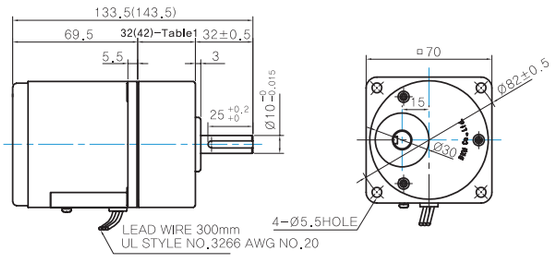

● **GEARBOX OUTPUT SHAFT**

MODEL	SPEC
KEY TYPE	
7GBK□BMH	

● **KEY SPEC**

GEARBOX


WEIGHT

PART		WEIGHT(kg)
MOTOR		0.83
GEAR BOX	7GBK3BMH - 7GBK18BMH	0.38
	7GBK20BMH - 7GBK40BMH	0.48
	7GBK50BMH - 7GBK200BMH	0.53

*The output flange and shaft are sold separately.

● **32(42)-Table1**

SIZE(mm)	GEAR RATIO
32	7GBK3BMH - 7GBK18BMH
42	7GBK20BMH - 7GBK200BMH

Connection Diagrams

Lead Wire Type	Terminal Box Type
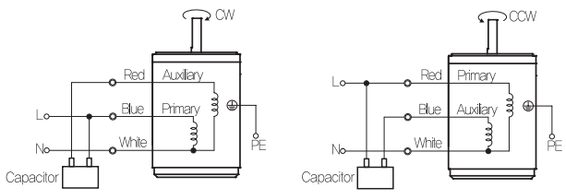	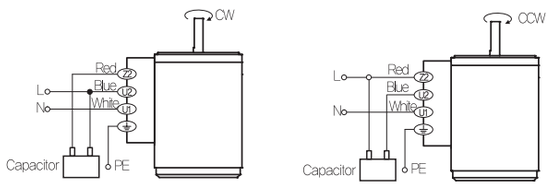

1) The direction of motor rotation is as viewed from the shaft end of the motor.
2) CW represents the clockwise direction, while CCW represents the counterclockwise direction.
3) Change the direction of single phase motor rotation only after bringing the motor to a stop. If an attempt is made to change the direction of rotation while the motor is rotating, the motor may ignore the reversing command or change its direction after some delay.

B AC Motors

Induction Motor 15W(□70mm)

15W Induction Motor 15W(□70mm)

Motor Specification

Model 7IDG*-15G(-T): Gear Type Shaft 7IDD*-15(-T): D-Cut Type Shaft		Output	Voltage	Frequency	Poles	Duty	Starting Torque		Rated Load				Capacitor
Lead Wire Type	Terminal Box Type	W	V	Hz			kgfcm	N.m	Speed r/min	Current A	Torque kgfcm	Torque N.m	μF / VAC
7ID◇1(A)-15□	7ID◇1(A)-15□-T	15	1ø 110	60	4	Cont.	0.70	0.070	1550	0.33	0.94	0.094	3.5 / 250
7ID◇B-15□	7ID◇B-15□-T	15	1ø 100	50	4	Cont.	0.94	0.094	1250	0.36	1.17	0.117	5.0 / 250
				60			0.90	0.090	1550	0.37	0.94	0.094	
7ID◇C-15□	7ID◇C-15□-T	15	1ø 200	50	4	Cont.	0.98	0.098	1250	0.20	1.17	0.117	1.2 / 450
				60			0.92	0.092	1550	0.19	0.94	0.094	
7ID◇2(D)-15□	7ID◇2(D)-15□-T	15	1ø 220	60	4	Cont.	1.02	0.102	1600	0.19	0.91	0.091	1.2 / 450
7ID◇E-15□	7ID◇E-15□-T	15	1ø 220	50	4	Cont.	0.94	0.094	1200	0.17	1.22	0.122	1.0 / 450
			1ø 240				1.12	0.112		0.19	1.22	0.122	
7ID◇3(G)-15□	7ID◇3(G)-15□-T	15	3ø 220	50	4	Cont.	3.20	0.320	1300	0.27	1.13	0.113	–
				60			2.30	0.230	1550	0.22	0.94	0.094	
			3ø 230	50	4	Cont.	3.60	0.360	1300	0.28	1.13	0.113	
				60			2.50	0.250	1550	0.24	0.94	0.094	

1) Enter the phase & voltage code in the place * within the motor model name. 2) Enter the output shaft type of motor in the place ◇ (G: Gear Type / D: D-Cut Type). and D-Cut Type Shaft is for using the motor only. 3) If the motor output shaft type is Gear Type, □ contains the model type name of the gearbox being attached. 4) The phase & voltage code A, B, C, D, E, G contain a built-in thermal protector.

Max. Permissible Torque at Output Shaft of Gearbox

60Hz

Motor Model	Gearbox Model	Gear Ratio	3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120	150	180
		r/min	600	500	360	300	240	200	180	144	120	100	90	72	60	50	45	36	30	24	20	18	15	12	10
7IDG*-15G	7GBK□BMH	kgfcm	2.2	2.7	3.7	4.4	5.5	6.7	7.4	9.2	11.1	13.3	13.3	16.7	20.0	24.0	26.7	30.1	36.2	45.2	50.0	50.0	50.0	50.0	50.0
		N.m	0.22	0.26	0.36	0.43	0.54	0.65	0.72	0.91	1.09	1.30	1.31	1.63	1.96	2.35	2.61	2.95	3.54	4.43	4.90	4.90	4.90	4.90	4.90

Motor Model	Gearbox Model	Gear Ratio	200
		r/min	9
7IDG*-15G	7GBK□BMH	kgfcm	50.0
		N.m	4.90

50Hz

Motor Model	Gearbox Model	Gear Ratio	3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120	150	180
		r/min	500	417	300	250	200	167	150	120	100	83	75	60	50	42	38	30	25	20	17	15	12.5	10	8
7IDG*-15G	7GBK□BMH	kgfcm	3.0	3.6	4.9	5.9	7.4	8.9	9.9	12.3	14.8	17.8	17.8	22.2	26.7	32.0	35.6	40.2	48.2	50.0	50.0	50.0	50.0	50.0	50.0
		N.m	0.29	0.35	0.48	0.58	0.72	0.87	0.97	1.21	1.45	1.74	1.74	2.18	2.61	3.14	3.48	3.94	4.72	4.90	4.90	4.90	4.90	4.90	4.90

Motor Model	Gearbox Model	Gear Ratio	200
		r/min	7.5
7IDG*-15G	7GBK□BMH	kgfcm	50.0
		N.m	4.90

1) Enter the phase & voltage code in the place * within the motor model name. 2) Enter the gear ratio in the place of □ within the gearbox model name. 3) A colored background indicates the gear shaft rotation in the same direction as the motor shaft ; a white background indicates the rotation in the opposite direction.
4) The rotating speed is calculated by dividing the motor's synchronous speed (50Hz: 1,500r/min, 60Hz: 1,800r/min) by the gear ratio. The actual speed is 2~20% less than the displayed value, depending on the size of the load.

Motor Images

7IDD□-15	7IDD□-15-T	7IDG□-15G+7GBK□BMH

Dimensions

MOTOR ONLY

● MOTOR MODEL: 7ID□□−15(−T) (NO FAN)

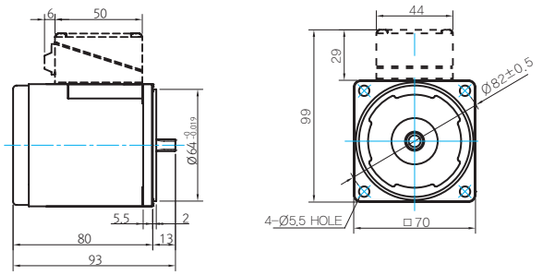

● MOTOR OUTPUT SHAFT

MODEL	SPEC
D-CUT TYPE	
7IDD□−15	

GEARED MOTOR

G TYPE GEARBOX

● MOTOR MODEL: 7IDG□−15G (NO FAN)

● GEARBOX MODEL: 7GBK□BMH

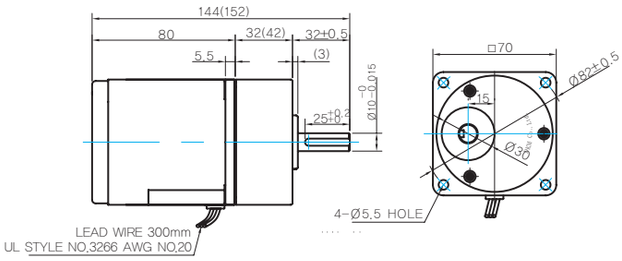

● GEARBOX OUTPUT SHAFT

MODEL	SPEC
KEY TYPE	
7GBK□BMH	

● KEY SPEC

GEARBOX



WEIGHT

PART		WEIGHT(kg)
MOTOR		1.10
GEAR BOX	7GBK3BMH - 7GBK18BMH	0.38
	7GBK20BMH - 7GBK40BMH	0.48
	7GBK50BMH - 7GBK200BMH	0.53

*The output flange and shaft are sold separately.

● 32(42)−Table1

SIZE(mm)	GEAR RATIO
32	7GBK3BMH − 7GBK18BMH
42	7GBK20BMH − 7GBK200BMH

Connection Diagrams

Lead Wire Type

[Single Phase]





[Three Phase]



* **CCW Direction:** Change any two connections among R, S and T.

INPUT \ LEAD WIRE	U	V	W
3Φ 200V-230V (3, G, J)	WHITE	RED	BLACK
3Φ 380V-400V (4, K)	WHITE	BLUE	BLACK
3Φ 415V-440V (5, L)	WHITE	YELLOW	BLACK

Terminal Box Type

[Single Phase]





[Three Phase]



* **CCW Direction:** Change any two connections among R, S and T.

INPUT \ LEAD WIRE	U	V	W
3Φ 200V-230V (3, G, J)	WHITE	RED	BLACK
3Φ 380V-400V (4, K)	WHITE	BLUE	BLACK
3Φ 415V-440V (5, L)	WHITE	YELLOW	BLACK

1) The direction of motor rotation is as viewed from the shaft end of the motor. 2) CW represents the clockwise direction, while CCW represents the counterclockwise direction. 3) Change the direction of single phase motor rotation only after bringing the motor to a stop. If an attempt is made to change the direction of rotation while the motor is rotating, the motor may ignore the reversing command or change its direction after some delay.

15W Induction Motor 15W(□80mm)

Motor Specification

Model (8IDG*-15□(-T): Gear Type Shaft; 8IDD*-15(-T): D-Cut Type Shaft)		Output	Voltage	Frequency	Poles	Duty	Starting Torque		Rated Load				Capacitor
Lead Wire Type	Terminal Box Type	W	V	Hz			kgfcm	N.m	Speed r/min	Current A	Torque kgfcm	Torque N.m	μF / VAC
8ID◇1(A)-15□	8ID◇1(A)-15□-T	15	1ø 110	60	4	Cont.	0.95	0.095	1600	0.54	0.91	0.091	3.5 / 250
8ID◇B-15□	8ID◇B-15□-T	15	1ø 100	50	4	Cont.	1.15	0.115	1350	0.52	1.08	0.108	5.0 / 250
				60			1.10	0.110	1600	0.47	0.91	0.091	
8ID◇C-15□	8ID◇C-15□-T	15	1ø 200	50	4	Cont.	1.20	0.120	1350	0.23	1.08	0.108	1.2 / 450
				60			1.15	0.115	1600	0.22	0.91	0.091	
8ID◇2(D)-15□	8ID◇2(D)-15□-T	15	1ø 220	60	4	Cont.	1.25	0.125	1600	0.23	0.91	0.091	1.2 / 450
8ID◇E-15□	8ID◇E-15□-T	15	1ø 220	50	4	Cont.	1.05	0.105	1300	0.23	1.12	0.112	1.0 / 450
			1ø 240				1.27	0.127		0.25	1.12	0.112	
8ID◇3(G)-15□	8ID◇3(G)-15□-T	15	3ø 220	50	4	Cont.	7.61	0.761	1350	0.29	1.08	0.108	-
				60			6.15	0.615	1600	0.26	0.91	0.091	
			3ø 230	50	4	Cont.	8.25	0.825	1350	0.32	1.08	0.108	
				60			6.72	0.672	1600	0.28	0.91	0.091	
8ID◇J-15□	8ID◇J-15□-T	15	3ø 200	50	4	Cont.	7.50	0.750	1350	0.28	1.08	0.108	-
				60			5.95	0.595	1600	0.25	0.91	0.091	
			3ø 220	50	4	Cont.	7.61	0.761	1350	0.29	1.08	0.108	
				60			6.15	0.615	1600	0.26	0.91	0.091	
8ID◇4(K)-15□	8ID◇4(K)-15□-T	15	3ø 380	50	4	Cont.	5.70	0.570	1350	0.12	1.08	0.108	-
				60			4.53	0.453	1600	0.11	0.91	0.091	
			3ø 400	50	4	Cont.	6.26	0.626	1350	0.13	1.08	0.108	
				60			5.03	0.503	1600	0.12	0.91	0.091	
8ID◇5(L)-15□	8ID◇5(L)-15□-T	15	3ø 415	50	4	Cont.	6.68	0.668	1350	0.14	1.08	0.108	-
				60			5.40	0.540	1600	0.12	0.91	0.091	
			3ø 440	50	4	Cont.	7.39	0.739	1350	0.15	1.08	0.108	
				60			6.02	0.602	1600	0.13	0.91	0.091	

1) Enter the phase & voltage code in the place * within the motor model name.
2) Enter the output shaft type of motor in the place ◇ (G: Gear Type / D: D-Cut Type). and D-Cut Type Shaft is for using the motor only.
3) If the motor output shaft type is Gear Type, □ contains the model type name of the gearbox being attached.
4) The phase & voltage code A, B, C, D, E, G, J, K, L contain a built-in thermal protector.
5) It is not possible to use an inverter for three phase 380~440V motor. When the inverter is used, the insulation of winding coil becomes hot and may cause damage to the motor.

Max. Permissible Torque at Output Shaft of Gearbox

60Hz

Motor Model	Gearbox Model	Gear Ratio	3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120
		r/min	600	500	360	300	240	200	180	144	120	100	90	72	60	50	45	36	30	24	20	18	15
8IDG*-15G	8GBK□BMH	kgfcm	2.2	2.7	3.7	4.4	5.5	6.7	7.4	9.2	11.1	13.3	13.3	16.7	20.0	24.0	26.7	30.1	36.2	45.2	54.2	60.3	72.3
		N.m	0.22	0.26	0.36	0.43	0.54	0.65	0.72	0.91	1.09	1.30	1.31	1.63	1.96	2.35	2.61	2.95	3.54	4.43	5.32	5.91	7.09

Motor Model	Gearbox Model	Gear Ratio	150	180	200	250	300	360
		r/min	12	10	9	7	6	5
8IDG*-15G	8GBK□BMH	kgfcm	80.0	80.0	80.0	80.0	80.0	80.0
		N.m	7.84	7.84	7.84	7.84	7.84	7.84

Motor Model	Gearbox Model	Gear Ratio	10	12	15	18	25	30	36	50	60
		r/min	180	150	120	100	72	60	50	36	30
8IDG*-15W	8WD□BL/□BR/□BRL	kgfcm	7.5	8.8	10.5	12.2	16.0	18.1	21.0	27.4	30.1
		N.m	0.73	0.86	1.03	1.19	1.57	1.77	2.06	2.68	2.95

50Hz

Motor Model	Gearbox Model	Gear Ratio	3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120
		r/min	500	417	300	250	200	167	150	120	100	83	75	60	50	42	37.5	30	25	20	17	15	12.5
8IDG*-15G	8GBK□BMH	kgfcm	2.6	3.2	4.4	5.3	6.6	7.9	8.8	11.0	13.1	15.8	15.8	19.8	23.7	28.4	31.6	35.7	42.9	53.6	64.3	71.4	80.0
		N.m	0.26	0.31	0.43	0.52	0.64	0.77	0.86	1.07	1.29	1.55	1.55	1.94	2.32	2.79	3.10	3.50	4.20	5.25	6.30	7.00	7.84

Motor Model	Gearbox Model	Gear Ratio	150	180	200	250	300	360
		r/min	10	8	7.5	6	5	4
8IDG*-15G	8GBK□BMH	kgfcm	80.0	80.0	80.0	80.0	80.0	80.0
		N.m	7.84	7.84	7.84	7.84	7.84	7.84

Motor Model	Gearbox Model	Gear Ratio	10	12	15	18	25	30	36	50	60
		r/min	150	125	100	83	60	50	42	30	25
8IDG*-15W	8WD□BL/□BR/□BRL	kgfcm	8.9	10.4	12.5	14.4	18.9	21.4	24.9	32.5	35.7
		N.m	0.87	1.02	1.22	1.41	1.86	2.10	2.44	3.18	3.50

1) Enter the phase & voltage code in the place * within the motor model name. 2) Enter the gear ratio in the place of □ within the gearbox model name. 3) A colored background indicates the gear shaft rotation in the same direction as the motor shaft ; a white background indicates the rotation in the opposite direction. 4) The rotating speed is calculated by dividing the motor's synchronous speed (50Hz: 1,500r/min, 60Hz: 1,800r/min) by the gear ratio. The actual speed is 2~20% less than the displayed value, depending on the size of the load.

Dimensions

MOTOR ONLY

● MOTOR MODEL: 8ID□□-15(-T) (NO FAN)

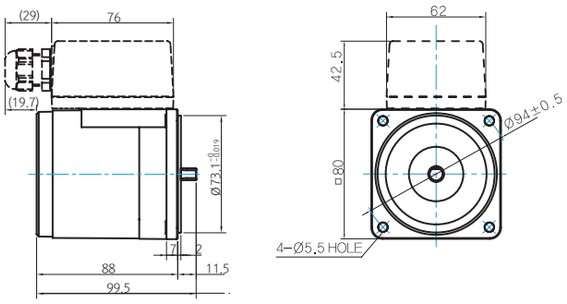

● MOTOR OUTPUT SHAFT

MODEL	SPEC
D-CUT TYPE	
8IDD□-15	

INTER-DECIMAL GEARBOX

● MODEL: 8XD10□□



GEARED MOTOR

G TYPE GEARBOX

● MOTOR MODEL:
8IDG□-15G (NO FAN)



● GEARBOX MODEL:
8GBK□BMH



● GEARHEAD OUTPUT SHAFT

MODEL	SPEC
KEY TYPE	
8GBK□BMH	

● 32(42.5)-Table1

SIZE(mm)	GEAR RATIO
32	8GBK3BMH - 8GBK18BMH
42.5	8GBK20BMH - 8GBK360BMH

● KEY SPEC

GEARBOX



W TYPE GEARBOX

● MOTOR MODEL:
8IDG□-15W (NO FAN)

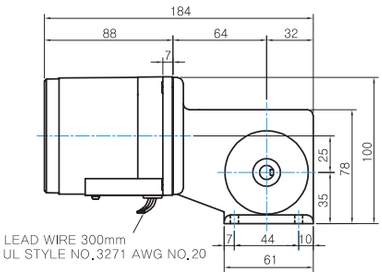

● GEARBOX MODEL:
8WD□BL/BR/BRL



● KEY SPEC

GEARBOX



WEIGHT

PART		WEIGHT(kg)
MOTOR		1.56
GEAR BOX	8GBK3BMH - 8GBK18BMH	0.56
	8GBK20BMH - 8GBK40BMH	0.65
	8GBK50BMH - 8GBK360BMH	0.72
	8WD□BL/BR/BRL	0.68
	8XD10○○	0.45

*The output flange and shaft are sold separately.

Motor Images

8IDD□-15	8IDD□-15-T	8IDG□-15G+8GBK□BMH	8IDG□-15W+8WD□BL

B AC Motors

Induction Motor 15W(□80mm)

Connection Diagrams

Lead Wire Type

[Single Phase]





[Three Phase]



* **CCW Direction:**
Change any two connections among R, S and T.

INPUT \ LEAD WIRE	U	V	W
3Φ 200V~230V (3, G, J)	WHITE	RED	BLACK
3Φ 380V~400V (4, K)	WHITE	BLUE	BLACK
3Φ 415V~440V (5, L)	WHITE	YELLOW	BLACK

Terminal Box Type

[Single Phase]





[Three Phase]



* **CCW Direction:**
Change any two connections among R, S and T.

INPUT \ LEAD WIRE	U	V	W
3Φ 200V~230V (3, G, J)	WHITE	RED	BLACK
3Φ 380V~400V (4, K)	WHITE	BLUE	BLACK
3Φ 415V~440V (5, L)	WHITE	YELLOW	BLACK

1) The direction of motor rotation is as viewed from the shaft end of the motor.
2) CW represents the clockwise direction, while CCW represents the counterclockwise direction.
3) Change the direction of single phase motor rotation only after bringing the motor to a stop.
If an attempt is made to change the direction of rotation while the motor is rotating, the motor may ignore the reversing command or change its direction after some delay.

25W Induction Motor 25W(□80mm)

Motor Specification

Model 8IDG*-25□(-T): Gear Type Shaft 8IDD*-25(-T): D-Cut Type Shaft		Output	Voltage	Frequency	Poles	Duty	Starting Torque		Rated Load				Capacitor
									Speed	Current	Torque		
Lead Wire Type	Terminal Box Type	W	V	Hz			kgfcm	N.m	r/min	A	kgfcm	N.m	μF / VAC
8ID◇1(A)-25□	8ID◇1(A)-25□-T	25	1ø 110	60	4	Cont.	1.63	0.163	1600	0.55	1.52	0.152	6.0 / 250
8ID◇B-25□	8ID◇B-25□-T	25	1ø 100	50	4	Cont.	1.45	0.145	1250	0.62	1.95	0.195	6.0 / 250
				60			1.35	0.135	1550	0.55	1.57	0.157	
8ID◇C-25□	8ID◇C-25□-T	25	1ø 200	50	4	Cont.	1.45	0.145	1250	0.26	1.95	0.195	1.5 / 450
				60			1.40	0.140	1550	0.25	1.57	0.157	
8ID◇2(D)-25□	8ID◇2(D)-25□-T	25	1ø 220	60	4	Cont.	1.59	0.159	1550	0.27	1.57	0.157	1.5 / 450
8ID◇E-25□	8ID◇E-25□-T	25	1ø 220	50	4	Cont.	1.57	0.157	1250	0.23	1.95	0.195	1.5 / 450
			1ø 240				1.87	0.187		0.25	1.95	0.195	
8ID◇3(G)-25□	8ID◇3(G)-25□-T	25	3ø 220	50	4	Cont.	7.61	0.761	1350	0.29	1.80	0.180	-
				60			6.15	0.615	1600	0.26	1.52	0.152	
			3ø 230	50	4	Cont.	8.25	0.825	1350	0.32	1.80	0.180	
				60			6.72	0.672	1600	0.28	1.52	0.152	
8ID◇J-25□	8ID◇J-25□-T	25	3ø 200	50	4	Cont.	7.50	0.750	1300	0.30	1.87	0.187	-
				60			5.95	0.595	1550	0.27	1.57	0.157	
			3ø 220	50	4	Cont.	7.61	0.761	1350	0.29	1.80	0.180	
				60			6.15	0.615	1600	0.26	1.52	0.152	
8ID◇4(K)-25□	8ID◇4(K)-25□-T	25	3ø 380	50	4	Cont.	5.70	0.570	1300	0.13	1.87	0.187	-
				60			4.53	0.453	1550	0.12	1.57	0.157	
			3ø 400	50	4	Cont.	6.26	0.626	1300	0.14	1.87	0.187	
				60			5.03	0.503	1550	0.13	1.57	0.157	
8ID◇5(L)-25□	8ID◇5(L)-25□-T	25	3ø 415	50	4	Cont.	6.68	0.668	1300	0.15	1.87	0.187	-
				60			5.40	0.540	1550	0.13	1.57	0.157	
			3ø 440	50	4	Cont.	7.39	0.739	1300	0.16	1.87	0.187	
				60			6.02	0.602	1550	0.14	1.57	0.157	

1) Enter the phase & voltage code in the place * within the motor model name. 2) Enter the output shaft type of motor in the place ◇ (G: Gear Type / D: D-Cut Type). and D-Cut Type Shaft is for using the motor only. 3) If the motor output shaft type is Gear Type, □ contains the model type name of the gearbox being attached. 4) The phase & voltage code A, B, C, D, E, G, J, K, L contain a built-in thermal protector. 5) It is not possible to use an inverter for three phase 380~440V motor. When the inverter is used, the insula becomes hot and may cause damage to the motor.

Max. Permissible Torque at Output Shaft of Gearbox

60Hz

Motor Model	Gearbox Model	Gear Ratio	3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120
		r/min	600	500	360	300	240	200	180	144	120	100	90	72	60	50	45	36	30	24	20	18	15
8IDG*-25G	8GBK□BMH	kgfcm	3.7	4.4	6.2	7.4	9.2	11.1	12.3	15.4	18.5	22.2	22.2	27.8	33.3	40.0	44.4	50.2	60.3	80.0	80.0	80.0	80.0
		N.m	0.36	0.43	0.60	0.72	0.91	1.09	1.21	1.51	1.81	2.17	2.18	2.72	3.27	3.92	4.35	4.92	5.91	7.84	7.84	7.84	7.84

Motor Model	Gearbox Model	Gear Ratio	150	180	200	250	300	360
		r/min	12	10	9	7	6	5
8IDG*-25G	8GBK□BMH	kgfcm	80.0	80.0	80.0	80.0	80.0	80.0
		N.m	7.84	7.84	7.84	7.84	7.84	7.84

Motor Model	Gearbox Model	Gear Ratio	10	12	15	18	25	30	36	50	60
		r/min	180	150	120	100	72	60	50	36	30
8IDG*-25W	8WD□BL/□BR/□BRL	kgfcm	12.5	14.6	17.6	20.3	26.6	30.1	35.1	45.7	50.2
		N.m	1.22	1.43	1.72	1.99	2.61	2.95	3.44	4.47	4.92

50Hz

Motor Model	Gearbox Model	Gear Ratio	3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120
		r/min	500	417	300	250	200	167	150	120	100	83	75	60	50	42	37.5	30	25	20	17	15	12.5
8IDG*-25G	8GBK□BMH	kgfcm	4.4	5.3	7.3	8.8	11.0	13.1	14.6	18.3	21.9	26.3	26.3	32.9	39.5	47.4	52.7	59.5	80.0	80.0	80.0	80.0	80.0
		N.m	0.43	0.52	0.72	0.86	1.07	1.29	1.43	1.79	2.15	2.58	2.58	3.23	3.87	4.65	5.16	5.83	7.84	7.84	7.84	7.84	7.84

Motor Model	Gearbox Model	Gear Ratio	150	180	200	250	300	360
		r/min	10	8	7.5	6	5	4
8IDG*-25G	8GBK□BMH	kgfcm	80.0	80.0	80.0	80.0	80.0	80.0
		N.m	7.84	7.84	7.84	7.84	7.84	7.84

Motor Model	Gearbox Model	Gear Ratio	10	12	15	18	25	30	36	50	60
		r/min	150	125	100	83	60	50	42	30	25
8IDG*-25W	8WD□BL/□BR/□BRL	kgfcm	14.8	17.3	20.8	24.0	31.6	35.7	41.6	54.1	59.5
		N.m	1.45	1.70	2.04	2.35	3.09	3.50	4.07	5.30	5.83

1) Enter the phase & voltage code in the place * within the motor model name. 2) Enter the gear ratio in the place of □ within the gearbox model name.
3) A colored background indicates the gear shaft rotation in the same direction as the motor shaft : a white background indicates the rotation in the opposite direction.
4) The rotating speed is calculated by dividing the motor's synchronous speed (50Hz: 1,500r/min, 60Hz: 1,800r/min) by the gear ratio. The actual speed is 2~20% less than the displayed value, depending on the size of the load.

B AC Motors

Induction Motor 25W(□80mm)

Dimensions

MOTOR ONLY

● MOTOR MODEL: 8ID□□-25(-T) (NO FAN)

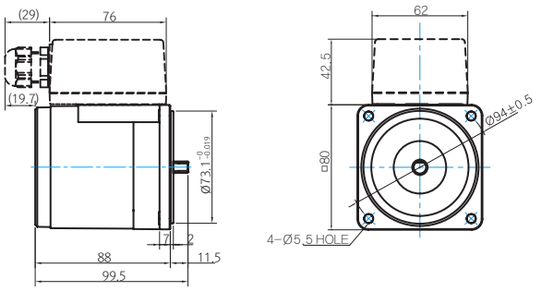

● MOTOR OUTPUT SHAFT

MODEL	SPEC
D-CUT TYPE	
8IDD□-25	

INTER-DECIMAL GEARBOX

● MODEL: 8XD10□□



GEARED MOTOR

G TYPE GEARBOX

● MOTOR MODEL:
8IDG□-25G (NO FAN)



● GEARBOX MODEL:
8GBK□BMH



● GEARBOX OUTPUT SHAFT

MODEL	SPEC
KEY TYPE	
8GBK□BMH	

● KEY SPEC

GEARBOX



● 32(42.5)-Table1

SIZE(mm)	GEAR RATIO
32	8GBK3BMH – 8GBK18BMH
42.5	8GBK20BMH – 8GBK360BMH

W TYPE GEARBOX

● MOTOR MODEL:
8IDG□-25W (NO FAN)

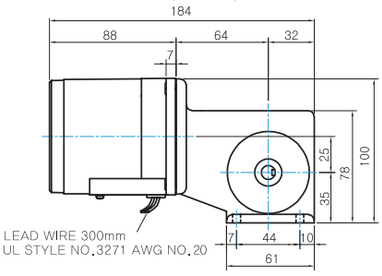

● GEARBOX MODEL:
8WD□BL/BR/BRL



● KEY SPEC

GEARBOX



WEIGHT

PART		WEIGHT(kg)
MOTOR		1.56
GEAR BOX	8GBK3BMH - 8GBK18BMH	0.56
	8GBK20BMH - 8GBK40BMH	0.65
	8GBK50BMH - 8GBK360BMH	0.72
	8WD□BL/BR/BRL	0.68
	8XD10○○	0.45

*The output flange and shaft are sold separately.

Motor Images

8IDD□-25	8IDD□-25-T	8IDG□-25G+8GBK□BMH	8IDG□-25W+8WD□BL

Connection Diagrams

Lead Wire Type

[Single Phase]





[Three Phase]



* **CCW Direction:**
Change any two connections among R, S and T.

INPUT \ LEAD WIRE	U	V	W
3Φ 200V-230V (3, G, J)	WHITE	RED	BLACK
3Φ 380V-400V (4, K)	WHITE	BLUE	BLACK
3Φ 415V-440V (5, L)	WHITE	YELLOW	BLACK

Terminal Box Type

[Single Phase]





[Three Phase]



* **CCW Direction:**
Change any two connections among R, S and T.

INPUT \ LEAD WIRE	U	V	W
3Φ 200V-230V (3, G, J)	WHITE	RED	BLACK
3Φ 380V-400V (4, K)	WHITE	BLUE	BLACK
3Φ 415V-440V (5, L)	WHITE	YELLOW	BLACK

1) The direction of motor rotation is as viewed from the shaft end of the motor.
2) CW represents the clockwise direction, while CCW represents the counterclockwise direction.
3) Change the direction of single phase motor rotation only after bringing the motor to a stop. If an attempt is made to change the direction of rotation while the motor is rotating, the motor may ignore the reversing command or change its direction after some delay.

B AC Motors

Induction Motor 40W(□80mm)

40W Induction Motor 40W(□80mm)

Motor Specification

Model 8IDG*-40F□(-T): Gear Type Shaft 8IDD*-40F(-T): D-Cut Type Shaft		Output	Voltage	Frequency	Poles	Duty	Starting Torque		Rated Load				Capacitor
Lead Wire Type	Terminal Box Type	W	V	Hz			kgfcm	N.m	Speed r/min	Current A	Torque kgfcm	Torque N.m	μF / VAC
8ID◇1(A)-40F□	8ID◇1(A)-40F□-T	40	1ø 110	60	4	Cont.	2.15	0.215	1550	0.65	2.52	0.252	8.0 / 250
8ID◇B-40□	8ID◇B-40□-T	40	1ø 100	50	4	Cont.	2.35	0.235	1200	0.73	3.25	0.325	10.0 / 250
				60			2.30	0.230	1500	0.76	2.60	0.260	
8ID◇C-40□	8ID◇C-40□-T	40	1ø 200	50	4	Cont.	2.35	0.235	1200	0.33	3.25	0.325	2.5 / 450
				60			2.30	0.230	1500	0.36	2.60	0.260	
8ID◇2(D)-40F□	8ID◇2(D)-40F□-T	40	1ø 220	60	4	Cont.	2.15	0.215	1500	0.33	2.60	0.260	2.0 / 450
8ID◇E-40F□	8ID◇E-40F□-T	40	1ø 220	50	4	Cont.	2.15	0.215	1200	0.33	3.25	0.325	2.0 / 450
			1ø 240				2.60	0.260		1250	0.33	3.12	

1) Enter the phase & voltage code in the place * within the motor model name. 2) Enter the output shaft type of motor in the place ◇ (G: Gear Type / D: D-Cut Type), and D-Cut Type Shaft is for using the motor only. 3) If the motor output shaft type is Gear Type, □ contains the model type name of the gearbox being attached. 4) The phase & voltage code A, B, C, D, E contain a built-in thermal protector.

Max. Permissible Torque at Output Shaft of Gearbox

60Hz

Motor Model	Gearbox Model	Gear Ratio	3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120
		r/min	600	500	360	300	240	200	180	144	120	100	90	72	60	50	45	36	30	24	20	18	15
8IDG*-40FG	8GBK□BMH	kgfcm	6.1	7.3	10.2	12.2	15.3	18.4	20.4	25.5	30.6	36.7	36.8	46.0	55.2	66.2	73.6	80.0	80.0	80.0	80.0	80.0	80.0
		N.m	0.60	0.72	1.00	1.20	1.50	1.80	2.00	2.50	3.00	3.60	3.61	4.51	5.41	6.49	7.21	7.84	7.84	7.84	7.84	7.84	7.84

Motor Model	Gearbox Model	Gear Ratio	150	180	200	250	300	360
		r/min	12	10	9	7	6	5
8IDG*-40FG	8GBK□BMH	kgfcm	80.0	80.0	80.0	80.0	80.0	80.0
		N.m	7.84	7.84	7.84	7.84	7.84	7.84

Motor Model	Gearbox Model	Gear Ratio	10	12	15	18	25	30	36	50	60
		r/min	180	150	120	100	72	60	50	36	30
8IDG*-40FW	8WD□BL/□BR/□BRL	kgfcm	20.7	24.2	29.1	33.6	44.1	49.9	58.1	60.0	60.0
		N.m	2.03	2.37	2.85	3.29	4.32	4.89	5.69	5.88	5.88

50Hz

Motor Model	Gearbox Model	Gear Ratio	3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120
		r/min	500	417	300	250	200	167	150	120	100	83	75	60	50	42	37.5	30	25	20	17	15	12.5
8IDG*-40FG	8GBK□BMH	kgfcm	7.6	9.1	12.6	15.2	19.0	22.7	25.3	31.6	37.9	45.5	45.6	56.9	68.3	80.0	80.0	80.0	80.0	80.0	80.0	80.0	80.0
		N.m	0.74	0.89	1.24	1.49	1.86	2.23	2.48	3.10	3.71	4.46	4.46	5.58	6.70	7.84	7.84	7.84	7.84	7.84	7.84	7.84	7.84

Motor Model	Gearbox Model	Gear Ratio	150	180	200	250	300	360
		r/min	10	8	7.5	6	5	4
8IDG*-40FG	8GBK□BMH	kgfcm	80.0	80.0	80.0	80.0	80.0	80.0
		N.m	7.84	7.84	7.84	7.84	7.84	7.84

Motor Model	Gearbox Model	Gear Ratio	10	12	15	18	25	30	36	50	60
		r/min	150	125	100	83	60	50	42	30	25
8IDG*-40FW	8WD□BL/□BR/□BRL	kgfcm	25.6	30.0	36.0	41.6	54.6	60.0	60.0	60.0	60.0
		N.m	2.51	2.94	3.53	4.07	5.35	5.88	5.88	5.88	5.88

1) Enter the phase & voltage code in the place * within the motor model name. 2) Enter the gear ratio in the place of □ within the gearbox model name. 3) A colored background indicates the gear shaft rotation in the same direction as the motor shaft ; a white background indicates the rotation in the opposite direction. 4) The rotating speed is calculated by dividing the motor's synchronous speed (50Hz: 1,500r/min, 60Hz: 1,800r/min) by the gear ratio. The actual speed is 2~20% less than the displayed value, depending on the size of the load.

Connection Diagrams

Lead Wire Type	Terminal Box Type

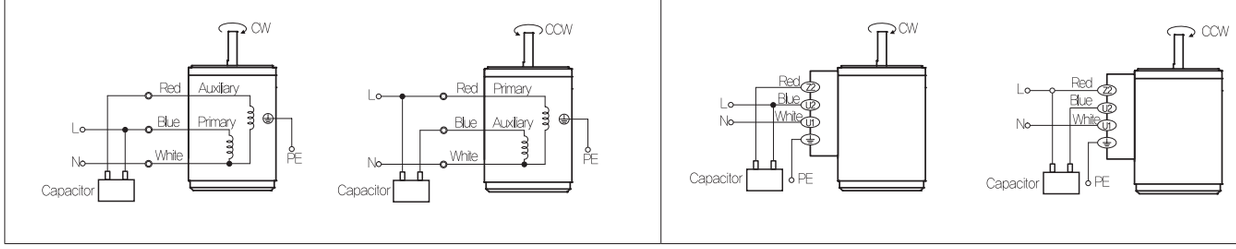

1) The direction of motor rotation is as viewed from the shaft end of the motor. 2) CW represents the clockwise direction, while CCW represents the counterclockwise direction.
3) Change the direction of single phase motor rotation only after bringing the motor to a stop. If an attempt is made to change the direction of rotation while the motor is rotating, the motor may ignore the reversing command or change its direction after some delay.

Dimensions

MOTOR ONLY

● MOTOR MODEL: 8ID□□-40F(-T)

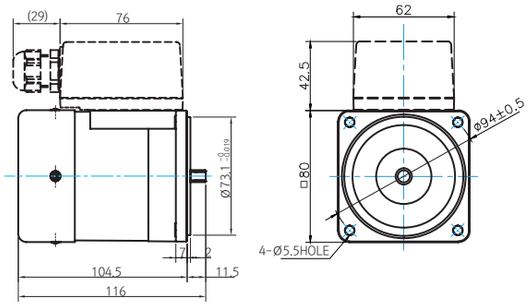

● MOTOR OUTPUT SHAFT

MODEL	SPEC
D-CUT TYPE	
8IDD□-40F	

INTER-DECIMAL GEARBOX

● MODEL: 8XD10□□

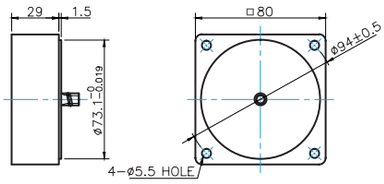

GEARED MOTOR

G TYPE GEARBOX

● MOTOR MODEL : 8IDG□-40FG



● GEARBOX MODEL : 8GBK□BMH



● GEARBOX OUTPUT SHAFT

MODEL	SPEC
KEY TYPE	
8GBK□BMH	

● 32(42.5)-Table1

SIZE(mm)	GEAR RATIO
32	8GBK3BMH - 8GBK18BMH
42.5	8GBK20BMH - 8GBK360BMH

● Key Spec



W TYPE GEARBOX

● MOTOR MODEL : 8IDG□-40FW

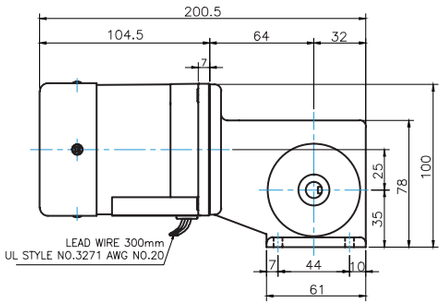

● GEARBOX MODEL : 8WD□BL/BR/BRL



● Key Spec



WEIGHT

PART		WEIGHT(kg)
MOTOR		1.66
GEAR BOX	8GBK3BMH - 8GBK18BMH	0.56
	8GBK20BMH - 8GBK40BMH	0.65
	8GBK50BMH - 8GBK360BMH	0.72
	8WD□BL/BR/BRL	0.68
	8XD10○○	0.45

*The output flange and shaft are sold separately.

Motor Images

8IDD□-40F	8IDD□-40F-T	8IDG□-40FG+8GBK□BMH	8IDG□-40FW+8WD□BL

B AC Motors

Induction Motor 40W(□90mm)

40W Induction Motor 40W(□90mm)

Motor Specification

Model 9IDG*-40□(-T): Gear Type Shaft 9IDD*-40(-T): D-Cut Type Shaft 9IDK*-40(-T): Key Type Shaft Lead Wire Type	Terminal Box Type	Output W	Voltage V	Frequency Hz	Poles	Duty	Starting Torque kgfcm	Starting Torque N.m	Rated Load Speed r/min	Rated Load Current A	Rated Load Torque kgfcm	Rated Load Torque N.m	Capacitor μF / VAC
9ID◇1(A)-40□	9ID◇1(A)-40□-T	40	1ø 110	60	4	Cont.	2.60	0.260	1600	0.80	2.44	0.244	10.0 / 250
9ID◇B-40□	9ID◇B-40□-T	40	1ø 100	50	4	Cont.	2.20	0.220	1250	0.89	3.12	0.312	10.0 / 250
				60			2.15	0.215	1550	0.81	2.52	0.252	
9ID◇C-40□	9ID◇C-40□-T	40	1ø 200	50	4	Cont.	2.90	0.299	1300	0.49	3.00	0.300	3.0 / 450
				60			2.75	0.275	1600	0.43	2.44	0.244	
9ID◇2(D)-40□	9ID◇2(D)-40□-T	40	1ø 220	60	4	Cont.	2.60	0.260	1600	0.45	2.44	0.244	2.5 / 450
9ID◇E-40□	9ID◇E-40□-T	40	1ø 220	50	4	Cont.	2.10	0.210	1300	0.33	3.00	0.300	2.0 / 450
			1ø 240				2.60	0.260		0.36	3.00	0.300	
9ID◇3(G)-40□	9ID◇3(G)-40□-T	40	3ø 220	50	4	Cont.	9.90	0.990	1350	0.33	2.89	0.289	–
				60			7.90	0.790	1600	0.31	2.44	0.244	
			3ø 230	50	4	Cont.	10.80	1.080	1350	0.35	2.89	0.289	
				60			8.50	0.850	1600	0.33	2.44	0.244	
9ID◇J-40□	9ID◇J-40□-T	40	3ø 200	50	4	Cont.	9.60	0.960	1300	0.34	3.00	0.300	–
				60			7.40	0.740	1550	0.31	2.52	0.252	
			3ø 220	50	4	Cont.	9.90	0.990	1350	0.33	2.89	0.289	
				60			7.90	0.790	1600	0.31	2.44	0.244	
9ID◇4(K)-40□	9ID◇4(K)-40□-T	40	3ø 380	50	4	Cont.	10.20	1.020	1350	0.19	2.89	0.289	–
				60			8.00	0.800	1600	0.18	2.44	0.244	
			3ø 400	50	4	Cont.	11.10	1.110	1350	0.20	2.89	0.289	
				60			8.80	0.880	1600	0.19	2.44	0.244	
9ID◇5(L)-40□	9ID◇5(L)-40□-T	40	3ø 415	50	4	Cont.	10.00	1.000	1350	0.17	2.89	0.289	–
				60			8.00	0.800	1600	0.16	2.44	0.244	
			3ø 440	50	4	Cont.	11.10	1.110	1350	0.18	2.89	0.289	
				60			8.90	0.890	1600	0.17	2.44	0.244	

Max. Permissible Torque at Output Shaft of Gearbox

1) Enter the phase & voltage code in the place * within the motor model name. 2) Enter the output shaft type of motor in the place ◇ (G: Gear Type / D: D-Cut Type / K: Key Type), and D-Cut Type / Key Type Shaft are for using the motor only. 3) If the motor output shaft type is Gear Type, □ contains the model type name of the gearbox being attached. 4) The phase & voltage code A, B, C, D, E, G, J, K, L contain a built-in thermal protector. 5) It is not possible to use an inverter for three phase 380~440V motor. When the inverter is used, the insulation of winding coil becomes hot and may cause damage to the motor.

60Hz

Motor Model	Gearbox Model	Gear Ratio	2	3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100
		r/min	900	600	500	360	300	240	200	180	144	120	100	90	72	60	50	45	36	30	24	20	18
9IDG*-40G	9GBK□BMH	kgfcm	3.9	5.9	7.1	9.9	11.8	14.8	17.8	19.7	24.7	29.6	35.5	35.6	44.4	53.3	64.0	71.1	80.4	96.4	100.0	100.0	100.0
		N.m	0.39	0.58	0.70	0.97	1.16	1.45	1.74	1.93	2.42	2.90	3.48	3.48	4.35	5.23	6.27	6.97	7.87	9.45	9.80	9.80	9.80

Motor Model	Gearbox Model	Gear Ratio	120	150	180	200
		r/min	15	12	10	9
9IDG*-40G	9GBK□BMH	kgfcm	100.0	100.0	100.0	100.0
		N.m	9.80	9.80	9.80	9.80

Motor Model	Gearbox Model	Gear Ratio	10	12	15	18	25	30	36	50	60
		r/min	180	150	120	100	72	60	50	36	30
9IDG*-40W	9WD□BL/□BR/□BRL	kgfcm	20.0	23.4	28.1	32.4	42.6	48.2	56.1	73.1	80.4
		N.m	1.96	2.29	2.76	3.18	4.18	4.72	5.50	7.16	7.87

Motor Model	Gearbox Model	Gear Ratio	2	3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120	150	180	200
		r/min	900	600	500	360	300	240	200	180	144	120	100	90	72	60	50	45	36	30	24	20	18	15	12	10	9
9IDG*-40P	9PBK□BH 9PFK□BH	kgfcm	3.9	5.9	7.1	9.9	11.8	14.8	17.8	19.7	22.2	26.7	32.0	35.6	40.2	48.2	57.9	64.3	80.4	96.4	107.7	129.3	143.7	172.4	200.0	200.0	200.0
		N.m	0.39	0.58	0.70	0.97	1.16	1.45	1.74	1.93	2.18	2.61	3.14	3.48	3.94	4.72	5.67	6.30	7.87	9.45	10.56	12.67	14.08	16.90	19.60	19.60	19.60

50Hz

Motor Model	Gearbox Model	Gear Ratio	2	3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100
		r/min	750	500	417	300	250	200	167	150	120	100	83	75	60	50	42	38	30	25	20	17	15
9IDG*-40G	9GBK□BMH	kgfcm	4.7	7.0	8.4	11.7	14.0	17.5	21.0	23.4	29.2	35.1	42.1	42.1	52.7	63.2	75.8	84.3	95.2	100.0	100.0	100.0	100.0
		N.m	0.46	0.69	0.82	1.15	1.37	1.72	2.06	2.29	2.86	3.44	4.12	4.13	5.16	6.19	7.43	8.26	9.33	9.80	9.80	9.80	9.80

Motor Model	Gearbox Model	Gear Ratio	120	150	180	200
		r/min	13	10	8	7
9IDG*-40G	9GBK□BMH	kgfcm	100.0	100.0	100.0	100.0
		N.m	9.80	9.80	9.80	9.80

Motor Model	Gearbox Model	Gear Ratio	10	12	15	18	25	30	36	50	60
		r/min	150	125	100	83	60	50	42	30	25
9IDG*-40W	9WD□BL/□BR/□BRL	kgfcm	23.7	27.7	33.3	38.4	50.5	57.1	66.5	86.6	95.2
		N.m	2.32	2.72	3.27	3.77	4.95	5.60	6.52	8.48	9.33

Motor Model	Gearbox Model	Gear Ratio	2	3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120	150	180	200
		r/min	750	500	417	300	250	200	167	150	120	100	83	75	60	50	42	37.5	30	25	20	17	15	12.5	10	8	7.5
9IDG*-40P	9PBK□BH 9PFK□BH	kgfcm	4.7	7.0	8.4	11.7	14.0	17.5	21.0	23.4	26.3	31.6	37.9	42.1	47.6	57.1	68.6	76.2	95.2	114.3	127.7	153.2	170.3	200.0	200.0	200.0	200.0
		N.m	0.46	0.69	0.82	1.15	1.37	1.72	2.06	2.29	2.58	3.10	3.72	4.13	4.67	5.60	6.72	7.47	9.33	11.20	12.51	15.02	16.69	19.60	19.60	19.60	19.60

1) Enter the phase & voltage code in the place * within the motor model name. 2) Enter the gear ratio in the place of □ within the gearbox model name. 3) A colored background indicates the gear shaft rotation in the same direction as the motor shaft ; a white background indicates the rotation in the opposite direction. 4) The rotating speed is calculated by dividing the motor's synchronous speed (50Hz: 1,500r/min, 60Hz: 1,800r/min) by the gear ratio. The actual speed is 2~20% less than the displayed value, depending on the size of the load.

Dimensions

MOTOR ONLY

● MOTOR MODEL: 9ID□□-40(-T) (NO FAN)

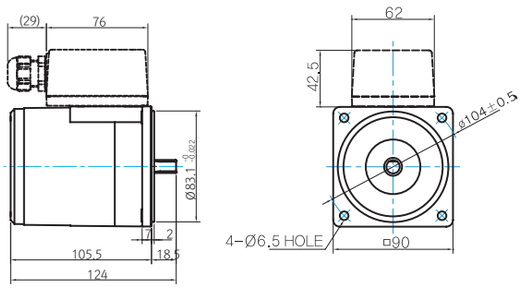

● MOTOR OUTPUT SHAFT

MODEL	SPEC
D-CUT TYPE	
9IDD□-40	
KEY TYPE	
9IDK□-40	

INTER-DECIMAL GEARBOX

● MODEL: 9XD10□□



● KEY SPEC



GEARED MOTOR

G TYPE GEARBOX

● MOTOR MODEL:
9IDG□-40G (NO FAN)



● GEARBOX MODEL:
9GBK□BMH



● GEARBOX OUTPUT SHAFT

MODEL	SPEC
KEY TYPE	
9GBK□BMH	

● 42(60)-Table1

SIZE(mm)	GEAR RATIO
42	9GBK2BMH – 9GBK18BMH
60	9GBK20BMH – 9GBK200BMH

● Key Spec



P TYPE GEARBOX

● MOTOR MODEL :
9IDG□-40P (NO FAN)



● GEARBOX MODEL :
9PBK□BH



● GEARBOX MODEL :
9PFK□BH

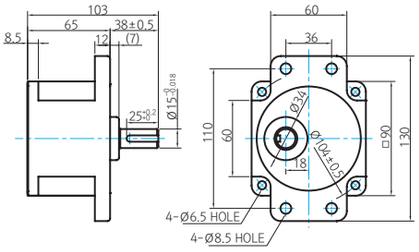

● GEARBOX OUTPUT SHAFT

MODEL	SPEC
KEY TYPE	
9PBK□BH 9PFK□BH	

● KEY SPEC



W TYPE GEARBOX

● MOTOR MODEL:
9IDG□-40W (NO FAN)

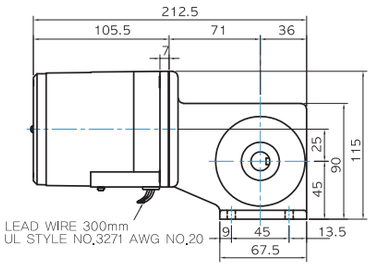

● GEARBOX MODEL:
9WD□BL/BR/BRL



● KEY SPEC



WEIGHT

PART		WEIGHT(kg)
MOTOR		2.45
GEAR BOX	9GBK2BMH – 9GBK18BMH	0.78
	9GBK20BMH – 9GBK40BMH	1.10
	9GBK50BMH – 9GBK200BMH	1.20
	9PB(F)K2BH – 9PB(F)K10BH	1.28
	9PB(F)K12.5BH – 9PB(F)K20BH	1.30
	9PB(F)K25BH – 9PB(F)K60BH	1.45
	9PB(F)K75BH – 9PB(F)K200BH	1.47
	9WD□BL/BR/BRL	1.00
	9XD10○○	0.60

*The output flange and shaft are sold separately.

B AC Motors

Induction Motor 40W(□90mm)

Motor Images

9IDD□-40	9IDD□-40-T	9IDG□-40G+9GBK□BMH	9IDG□-40P+9PBK□BH

9IDG□-40W+9WD□BL

Connection Diagrams

Lead Wire Type

[Single Phase]





[Three Phase]



* **CCW Direction:**
Change any two connections among R, S and T.

INPUT \ LEAD WIRE	U	V	W
3Φ 200V~230V (3, G, J)	WHITE	RED	BLACK
3Φ 380V~400V (4, K)	WHITE	BLUE	BLACK
3Φ 415V~440V (5, L)	WHITE	YELLOW	BLACK

Terminal Box Type

[Single Phase]





[Three Phase]



* **CCW Direction:**
Change any two connections among R, S and T.

INPUT \ LEAD WIRE	U	V	W
3Φ 200V~230V (3, G, J)	WHITE	RED	BLACK
3Φ 380V~400V (4, K)	WHITE	BLUE	BLACK
3Φ 415V~440V (5, L)	WHITE	YELLOW	BLACK

1) The direction of motor rotation is as viewed from the shaft end of the motor.
2) CW represents the clockwise direction, while CCW represents the counterclockwise direction.
3) Change the direction of single phase motor rotation only after bringing the motor to a stop. If an attempt is made to change the direction of rotation while the motor is rotating, the motor may ignore the reversing command or change its direction after some delay.

60W Induction Motor 60W(□ 90mm)

Motor Specification

Model 9IDG*-60F□(-T): Gear Type Shaft 9IDD*-60F(-T): D-Cut Type Shaft 9IDK*-60F(-T): Key Type Shaft Lead Wire Type	Terminal Box Type	Output W	Voltage V	Frequency Hz	Poles	Duty	Starting Torque kgfcm	Starting Torque N.m	Rated Load Speed r/min	Rated Load Current A	Rated Load Torque kgfcm	Rated Load Torque N.m	Capacitor μF / VAC
9ID◇1(A)-60F□	9ID◇1(A)-60F□-T	60	1ø 110	60	4	Cont.	4.30	0.430	1600	1.30	3.65	0.365	16.0 / 250
9ID◇B-60F□	9ID◇B-60F□-T	60	1ø 100	50	4	Cont.	4.80	0.480	1300	1.40	4.50	0.450	20.0 / 250
				60			4.60	0.460	1600	1.40	3.65	0.365	
9ID◇C-60F□	9ID◇C-60F□-T	60	1ø 200	50	4	Cont.	4.70	0.470	1300	0.71	4.50	0.450	5.0 / 450
				60			4.50	0.450	1600	0.69	3.65	0.365	
9ID◇2(D)-60F□	9ID◇2(D)-60F□-T	60	1ø 220	60	4	Cont.	4.20	0.420	1600	0.68	3.65	0.365	4.0 / 450
9ID◇E-60F□	9ID◇E-60F□-T	60	1ø 220	50	4	Cont.	3.90	0.390	1300	0.48	4.50	0.450	3.5 / 450
			1ø 240				4.80	0.480		0.54	4.50	0.450	
9ID◇3(G)-60F□	9ID◇3(G)-60F□-T	60	3ø 220	50	4	Cont.	17.20	1.720	1350	0.59	4.33	0.433	–
				60			13.80	1.380	1600	0.53	3.65	0.365	
			3ø 230	50	4	Cont.	18.80	1.880	1350	0.62	4.33	0.433	
				60			15.00	1.500	1600	0.56	3.65	0.365	
9ID◇J-60F□	9ID◇J-60F□-T	60	3ø 200	50	4	Cont.	16.50	1.650	1300	0.57	4.50	0.450	–
				60			13.00	1.300	1550	0.52	3.77	0.377	
			3ø 220	50	4	Cont.	17.20	1.720	1350	0.59	4.33	0.433	
				60			13.80	1.380	1600	0.53	3.65	0.365	
9ID◇4(K)-60F□	9ID◇4(K)-60F□-T	60	3ø 380	50	4	Cont.	16.70	1.670	1350	0.31	4.33	0.433	–
				60			13.40	1.340	1600	0.28	3.65	0.365	
			3ø 400	50	4	Cont.	18.30	1.830	1350	0.34	4.33	0.433	
				60			14.70	1.470	1600	0.30	3.65	0.365	
9ID◇5(L)-60F□	9ID◇5(L)-60F□-T	60	3ø 415	50	4	Cont.	16.70	1.670	1350	0.29	4.33	0.433	–
				60			13.40	1.340	1600	0.26	3.65	0.365	
			3ø 440	50	4	Cont.	18.50	1.850	1350	0.31	4.33	0.433	
				60			15.00	1.500	1600	0.28	3.65	0.365	

Max. Permissible Torque at Output Shaft of Gearbox

1) Enter the phase & voltage code in the place * within the motor model name. 2) Enter the output shaft type of motor in the place ◇ (G: Gear Type / D: D-Cut Type / K: Key Type). and D-Cut Type / Key Type Shaft are for using the motor only. 3) If the motor output shaft type is Gear Type, □ contains the model type name of the gearbox being attached. 4) The phase & voltage code A, B, C, D, E, G, J, K, L contain a built-in thermal protector. 5) It is not possible to use an inverter for three phase 380~440V motor. When the inverter is used, the insulation of winding coil becomes hot and may cause damage to the motor.

60Hz

Motor Model	Gearbox Model	Gear Ratio	2	3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120	150	180	200
		r/min	900	600	500	360	300	240	200	180	144	120	100	90	72	60	50	45	36	30	24	20	18	15	12	10	9
9IDG*-60FP	9PBK□BH 9PFK□BH	kgfcm	5.9	8.9	10.7	14.8	17.8	22.2	26.6	29.6	33.3	40.0	48.0	53.3	60.3	72.3	86.8	96.4	120.5	144.6	161.6	193.9	200.0	200.0	200.0	200.0	200.0
		N.m	0.58	0.87	1.04	1.45	1.74	2.17	2.61	2.90	3.27	3.92	4.70	5.23	5.91	7.09	8.50	9.45	11.81	14.17	15.84	19.01	19.60	19.60	19.60	19.60	19.60
9IDG*-60FH	9HBK□BH 9HFK□BH	kgfcm	–	8.9	10.7	14.8	17.8	22.2	26.6	29.6	33.3	40.0	48.0	53.3	60.3	72.3	86.8	96.4	120.5	144.6	161.6	193.9	215.5	258.6	300.0	300.0	300.0
		N.m		0.87	1.04	1.45	1.74	2.17	2.61	2.90	3.27	3.92	4.70	5.23	5.91	7.09	8.50	8.50	9.45	11.81	14.17	15.84	19.01	21.12	25.34	29.40	29.40

Motor Model	Gearbox Model	Gear Ratio	10	12	15	18	25	30	36	50	60
		r/min	180	150	120	100	72	60	50	36	30
9IDG*-60FW	9WD□BL/□BR/□BRL	kgfcm	30.0	35.1	42.2	48.7	63.9	72.3	84.2	109.6	120.5
		N.m	2.94	3.44	4.13	4.77	6.26	7.09	8.25	10.74	11.81

Motor Model	Gearbox Model	Gear Ratio	5	7.5	10	15	20	25	30	40	50	60	80
		r/min	360	240	180	120	90	72	60	45	36	30	22
9IDG*-60FWH	9WHD□-030	kgfcm	12.7	18.4	23.7	33.3	42.1	48.2	56.1	69.0	78.9	87.7	102.9
		N.m	1.25	1.80	2.32	3.26	4.12	4.72	5.50	6.76	7.73	8.59	10.08

50Hz

Motor Model	Gearbox Model	Gear Ratio	2	3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120	150	180	200
		r/min	750	500	417	300	250	200	167	150	120	100	83	75	60	50	42	37.5	30	25	20	17	15	12.5	10	8	7.5
9IDG*-60FP	9PBK□BH 9PFK□BH	kgfcm	7.0	10.5	12.6	17.5	21.0	26.3	31.6	35.1	39.5	47.4	56.9	63.2	71.4	85.7	102.9	114.3	142.9	171.4	191.6	200.0	200.0	200.0	200.0	200.0	200.0
		N.m	0.69	1.03	1.24	1.72	2.06	2.58	3.09	3.44	3.87	4.65	5.57	6.19	7.00	8.40	10.08	11.20	14.00	16.80	18.77	19.60	19.60	19.60	19.60	19.60	19.60
9IDG*-60FH	9HBK□BH 9HFK□BH	kgfcm	–	10.5	12.6	17.5	21.0	26.3	31.6	35.1	39.5	47.4	56.9	63.2	71.4	85.7	102.9	114.3	142.9	171.4	191.6	229.9	255.4	300.0	300.0	300.0	300.0
		N.m		1.03	1.24	1.72	2.06	2.58	3.09	3.44	3.87	4.65	5.57	6.19	7.00	8.40	10.08	11.20	14.00	16.80	18.77	22.53	25.03	29.40	29.40	29.40	29.40

Motor Model	Gearbox Model	Gear Ratio	10	12	15	18	25	30	36	50	60
		r/min	150	125	100	83	60	50	42	30	25
9IDG*-60FW	9WD□BL/□BR/□BRL	kgfcm	35.5	41.6	50.0	57.7	75.8	85.7	99.7	129.9	122.4
		N.m	3.48	4.07	4.90	5.65	7.42	8.40	9.77	12.73	12.00

Motor Model	Gearbox Model	Gear Ratio	5	7.5	10	15	20	25	30	40	50	60	80
		r/min	300	200	150	100	75	60	50	38	30	25	18
9IDG*-60FWH	9WHD□-030	kgfcm	15.1	21.8	28.1	39.5	49.9	57.1	66.5	81.7	93.5	103.9	121.9
		N.m	1.48	2.14	2.75	3.87	4.89	5.60	6.52	8.01	9.16	10.18	11.95

1) Enter the phase & voltage code in the place * within the motor model name. 2) Enter the gear ratio in the place of □ within the gearbox model name. 3) A colored background indicates the gear shaft rotation in the same direction as the motor shaft ; a white background indicates the rotation in the opposite direction. 4) The rotating speed is calculated by dividing the motor's synchronous speed (50Hz: 1,500r/min, 60Hz: 1,800r/min) by the gear ratio. The actual speed is 2~20% less than the displayed value, depending on the size of the load.

B AC Motors

Induction Motor 60W(□90mm)

Dimensions

MOTOR ONLY

● MOTOR MODEL:
9ID□□-60F(-T) (GENERAL FAN)

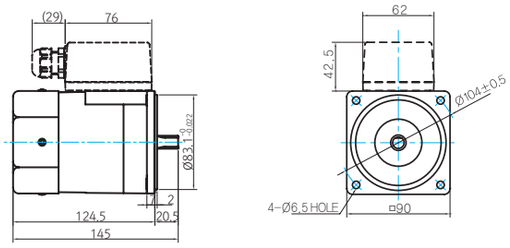

● MOTOR OUTPUT SHAFT

MODEL	SPEC
D-CUT TYPE	
9IDD□-60F	
KEY TYPE	
9IDK□-60F	

● KEY SPEC

MOTOR



INTER-DECIMAL GEARBOX

● MODEL:
9XD10□□



GEARED MOTOR

P TYPE GEARBOX

● MOTOR MODEL:
9IDG□-60FP (GENERAL FAN)



● GEARBOX MODEL:
9PBK□BH



● GEARBOX MODEL:
9PFK□BH

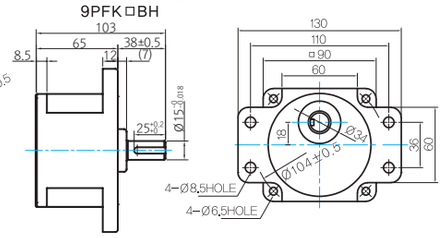

● GEARBOX OUTPUT SHAFT

MODEL	SPEC
KEY TYPE	
9PBK□BH 9PFK□BH	

● KEY SPEC

GEARBOX



H TYPE GEARBOX

● MOTOR MODEL:
9IDG□-60FH (GENERAL FAN)

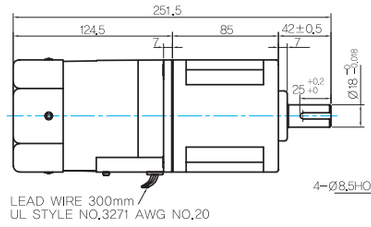

● GEARBOX MODEL:
9HBK□BH



● GEARBOX MODEL:
9HFK□BH

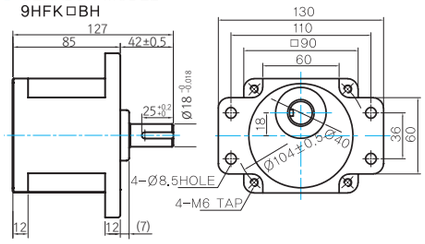

● GEARBOX OUTPUT SHAFT

MODEL	SPEC
KEY TYPE	
9HBK□BH 9HFK□BH	

● KEY SPEC

GEARBOX



W TYPE GEARBOX

● MOTOR MODEL:
9IDG□-60FW (GENERAL FAN)

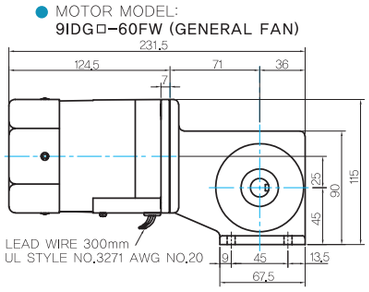

● GEARBOX MODEL:
9WD□BL/BR/BRL



● KEY SPEC

GEARBOX



WH TYPE GEARBOX

● MOTOR MODEL:
9IDG□-60FWH (GENERAL FAN)

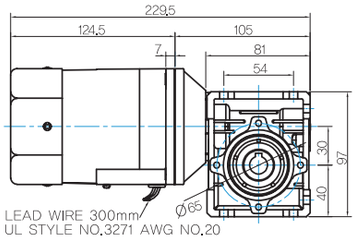

● GEARBOX MODEL:
9WHD□-030





● SHAFT



Unidirectional Bi-directional

● FLANGE

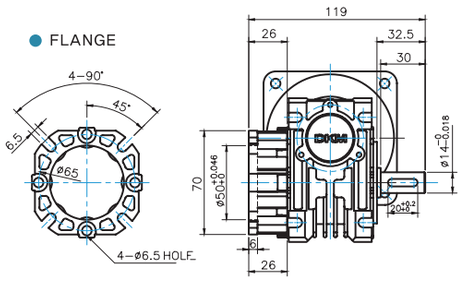

● KEY SPEC

GEARBOX



WEIGHT

PART		WEIGHT(kg)
MOTOR		2.65
GEAR BOX	9PB(F)K2BH - 9PB(F)K10BH	1.28
	9PB(F)K12.5BH - 9PB(F)K20BH	1.30
	9PB(F)K25BH - 9PB(F)K60BH	1.45
	9PB(F)K75BH - 9PB(F)K200BH	1.47
	9HB(F)K3BH - 9HB(F)K10BH	1.62
	9HB(F)K12.5BH - 9HB(F)K20BH	1.68
	9HB(F)K25BH - 9HB(F)K60BH	1.73
	9HB(F)K75BH - 9HB(F)K200BH	1.78
	9WD□BL/BR/BRL	1.00
	9WHD□-030	1.20
	9XD10○○	0.60

*The output flange and shaft are sold separately.

Motor Images

9IDD□-60F	9IDD□-60F-T	9IDG□-60FP+9PBK□BH	9IDG□-60FP+9PFK□BH
9IDG□-60FH+9HBK□BH	**9IDG□-60FH+9HFK□BH**	**9IDG□-60FW+9WD□BL**	**9IDG□-60FWH+9WHD□-030**

B AC Motors

Induction Motor 60W(□ 90mm)

Connection Diagrams

Lead Wire Type

[Single Phase]





[Three Phase]



* **CCW Direction:**
Change any two connections among R, S and T.

INPUT \ LEAD WIRE	U	V	W
3Φ 200V~230V (3, G, J)	WHITE	RED	BLACK
3Φ 380V~400V (4, K)	WHITE	BLUE	BLACK
3Φ 415V~440V (5, L)	WHITE	YELLOW	BLACK

Terminal Box Type

[Single Phase]





[Three Phase]



* **CCW Direction:**
Change any two connections among R, S and T.

INPUT \ LEAD WIRE	U	V	W
3Φ 200V~230V (3, G, J)	WHITE	RED	BLACK
3Φ 380V~400V (4, K)	WHITE	BLUE	BLACK
3Φ 415V~440V (5, L)	WHITE	YELLOW	BLACK

1) The direction of motor rotation is as viewed from the shaft end of the motor.
2) CW represents the clockwise direction, while CCW represents the counterclockwise direction.
3) Change the direction of single phase motor rotation only after bringing the motor to a stop. If an attempt is made to change the direction of rotation while the motor is rotating, the motor may ignore the reversing command or change its direction after some delay.

Induction Motor 90W(□ 90mm)

90W Induction Motor 90W(□ 90mm)

Motor Specification

Model (9IDG*-90F□(-T): Gear Type Shaft, 9IDD*-90F(-T): D-Cut Type Shaft, 9IDK*-90F(-T): Key Type Shaft)		Output	Voltage	Frequency	Poles	Duty	Starting Torque		Rated Load				Capacitor
Lead Wire Type	Terminal Box Type	W	V	Hz			kgfcm	N.m	Speed r/min	Current A	Torque kgfcm	Torque N.m	μF / VAC
9ID◇1(A)-90F□	9ID◇1(A)-90F□-T	90	1ø 110	60	4	Cont.	5.00	0.500	1600	1.80	5.48	0.548	20.0 / 250
9ID◇B-90F□	9ID◇B-90F□-T	90	1ø 100	50	4	Cont.	5.90	0.590	1300	1.80	6.74	0.674	25.0 / 250
				60			5.40	0.540	1600	1.85	5.48	0.548	
9ID◇C-90F□	9ID◇C-90F□-T	90	1ø 200	50	4	Cont.	5.70	0.570	1300	1.10	6.74	0.674	6.0 / 450
				60			5.20	0.520	1600	0.94	5.48	0.548	
9ID◇2(D)-90F□	9ID◇2(D)-90F□-T	90	1ø 220	60	4	Cont.	5.00	0.500	1600	1.00	5.48	0.548	5.0 / 450
9ID◇E-90F□	9ID◇E-90F□-T	90	1ø 220	50	4	Cont.	5.30	0.530	1300	0.70	6.74	0.674	5.0 / 450
			1ø 240				6.30	0.630		0.76	6.74	0.674	
9ID◇3(G)-90F□	9ID◇3(G)-90F□-T	90	3ø 220	50	4	Cont.	20.50	2.050	1350	0.65	6.49	0.649	-
				60			16.20	1.620	1600	0.60	5.48	0.548	
			3ø 230	50	4	Cont.	22.00	2.200	1350	0.68	6.49	0.649	
				60			17.60	1.760	1600	0.63	5.48	0.548	
9ID◇J-90F□	9ID◇J-90F□-T	90	3ø 200	50	4	Cont.	18.50	1.850	1300	0.65	6.74	0.674	-
				60			14.00	1.400	1550	0.60	5.66	0.566	
			3ø 220	50	4	Cont.	20.50	2.050	1350	0.65	6.49	0.649	
				60			16.20	1.620	1600	0.60	5.48	0.548	
9ID◇4(K)-90F□3	9ID◇4(K)-90F□-T	90	3ø 380	50	4	Cont.	20.00	2.000	1350	0.35	6.49	0.649	-
				60			15.70	1.570	1600	0.33	5.48	0.548	
			3ø 400	50	4	Cont.	21.80	2.180	1350	0.37	6.49	0.649	
				60			17.30	1.730	1600	0.35	5.48	0.548	
9ID◇5(L)-90F□	9ID◇5(L)-90F□-T	90	3ø 415	50	4	Cont.	20.50	2.050	1350	0.33	6.49	0.649	-
				60			16.20	1.620	1600	0.31	5.48	0.548	
			3ø 440	50	4	Cont.	22.70	2.270	1350	0.36	6.49	0.649	
				60			18.10	1.810	1600	0.33	5.48	0.548	

Max. Permissible Torque at Output Shaft of Gearbox

1) Enter the phase & voltage code in the place * within the motor model name. 2) Enter the output shaft type of motor in the place ◇ (G: Gear Type / D: D-Cut Type / K: Key Type), and D-Cut Type / Key Type Shaft are for using the motor only. 3) If the motor output shaft type is Gear Type, □ contains the model type name of the gearbox being attached. 4) The phase & voltage code A, B, C, D, E, G, J, K, L contain a built-in thermal protector. 5) It is not possible to use an inverter for three phase 380~440V motor. When the inverter is used, the insulation of winding coil becomes hot and may cause damage to the motor.

60Hz

Motor Model	Gearbox Model	Gear Ratio	2	3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120	150	180	200
		r/min	900	600	500	360	300	240	200	180	144	120	100	90	72	60	50	45	36	30	24	20	18	15	12	10	9
9IDG*-90FP	9PBK□BH 9PFK□BH	kgfcm	8.9	13.3	16.0	22.2	26.6	33.3	39.9	44.4	50.0	60.0	72.0	80.0	90.4	108.5	130.2	144.6	180.8	200.0	200.0	200.0	200.0	200.0	200.0	200.0	200.0
		N.m	0.87	1.30	1.57	2.17	2.61	3.26	3.91	4.35	4.90	5.88	7.06	7.84	8.86	10.63	12.76	14.17	17.72	19.60	19.60	19.60	19.60	19.60	19.60	19.60	19.60
9IDG*-90FH	9HBK□BH 9HFK□BH	kgfcm	-	13.3	16.0	22.2	26.6	33.3	39.9	44.4	50.0	60.0	72.0	80.0	90.4	108.5	130.2	144.6	180.8	217.0	242.4	290.9	300.0	300.0	300.0	300.0	300.0
		N.m		1.30	1.57	2.17	2.61	3.26	3.91	4.35	4.90	5.88	7.06	7.84	8.86	10.63	12.76	14.17	17.72	21.26	23.76	28.51	29.40	29.40	29.40	29.40	29.40

Motor Model	Gearbox Model	Gear Ratio	10	12	15	18	25	30	36	50	60
		r/min	180	150	120	100	72	60	50	36	30
9IDG*-90FW	9WD□BL/□BR/□BRL	kgfcm	44.9	52.6	63.3	73.0	95.9	108.5	126.2	142.9	122.4
		N.m	4.40	5.15	6.20	7.15	9.40	10.63	12.37	14.00	12.00

Motor Model	Gearbox Model	Gear Ratio	5	7.5	10	15	20	25	30	40	50	60	80
		r/min	360	240	180	120	90	72	60	45	36	30	22
9IDG*-90FWH	9WHD □-030	kgfcm	19.1	27.6	35.5	50.0	63.1	72.3	84.2	103.4	118.3	131.5	132.7
		N.m	1.87	2.71	3.48	4.90	6.19	7.09	8.25	10.14	11.60	12.89	13.00

Motor Model	Gearbox Model	Gear Ratio	15	20	25	30	40	50	60	80	100	120	160	200	225	240
		r/min	120	90	72	60	45	36	30	22.5	18	15	11.3	9	8	7.5
9IDG*-90FHC	9HC□-◇	kgfcm	60.0	80.0	100.0	120.0	160.0	200.0	240.0	320.0	399.9	479.9	639.9	799.9	899.9	959.9
		N.m	5.88	7.84	9.80	11.76	15.68	19.60	23.52	31.36	39.19	47.03	62.71	78.39	88.19	94.07

50Hz

Motor Model	Gearbox Model	Gear Ratio	2	3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120	150	180	200
		r/min	750	500	417	300	250	200	167	150	120	100	83	75	60	50	42	37.5	30	25	20	17	15	12.5	10	8	7.5
9IDG*-90FP	9PBK□BH 9PFK□BH	kgfcm	10.5	15.8	18.9	26.3	31.6	39.4	47.3	52.6	59.3	71.1	85.3	94.8	107.1	128.6	154.3	171.4	200.0	200.0	200.0	200.0	200.0	200.0	200.0	200.0	200.0
		N.m	1.03	1.55	1.86	2.58	3.09	3.87	4.64	5.15	5.81	6.97	8.36	9.29	10.50	12.60	15.12	16.80	19.60	19.60	19.60	19.60	19.60	19.60	19.60	19.60	19.60
9IDG*-90FH	9HBK□BH 9HFK□BH	kgfcm	-	15.8	18.9	26.3	31.6	39.4	47.3	52.6	59.3	71.1	85.3	94.8	107.1	128.6	154.3	171.4	214.3	257.1	287.3	300.0	300.0	300.0	300.0	300.0	300.0
		N.m		1.55	1.86	2.58	3.09	3.87	4.64	5.15	5.81	6.97	8.36	9.29	10.50	12.60	15.12	16.80	21.00	25.20	28.16	29.40	29.40	29.40	29.40	29.40	29.40

Motor Model	Gearbox Model	Gear Ratio	10	12	15	18	25	30	36	50	60
		r/min	150	125	100	83	60	50	42	30	25
9IDG*-90FW	9WD□BL/□BR/□BRL	kgfcm	53.2	62.3	75.0	86.5	113.6	128.6	149.6	142.9	122.4
		N.m	5.22	6.11	7.35	8.48	11.14	12.60	14.66	14.00	12.00

Motor Model	Gearbox Model	Gear Ratio	5	7.5	10	15	20	25	30	40	50	60	80
		r/min	300	200	150	100	75	60	50	38	30	25	18
9IDG*-90FWH	9WHD □-030	kgfcm	22.6	32.7	42.1	59.2	74.8	85.7	99.7	122.6	140.3	155.8	132.7
		N.m	2.21	3.21	4.12	5.80	7.33	8.40	9.77	12.01	13.75	15.27	13.00

Motor Model	Gearbox Model	Gear Ratio	15	20	25	30	40	50	60	80	100	120	160	200	225	240
		r/min	100	75	60	50	37.5	30	25	18.8	15	12.5	9.4	7.5	6.7	6.3
9IDG*-90FHC	9HC□-◇	kgfcm	71.1	94.8	118.5	142.2	189.6	237.0	284.4	379.2	474.0	568.8	758.4	948.0	1066.5	1137.6
		N.m	6.97	9.29	11.61	13.94	18.58	23.23	27.87	37.16	46.45	55.74	74.33	92.91	104.52	111.49

1) Enter the phase & voltage code in the place * within the motor model name. 2) Enter the gear ratio in the place of □ within the gearbox model name. 3) A colored background indicates the gear shaft rotation in the same direction as the motor shaft ; a white background indicates the rotation in the opposite direction. 4) The rotating speed is calculated by dividing the motor's synchronous speed (50Hz: 1,500r/min, 60Hz: 1,800r/min) by the gear ratio. The actual speed is 2~20% less than the displayed value, depending on the size of the load.

B AC Motors

Induction Motor 90W(□90mm)

Dimensions

MOTOR ONLY

● MOTOR MODEL:
9ID□□-90F(-T)(GENERAL FAN)

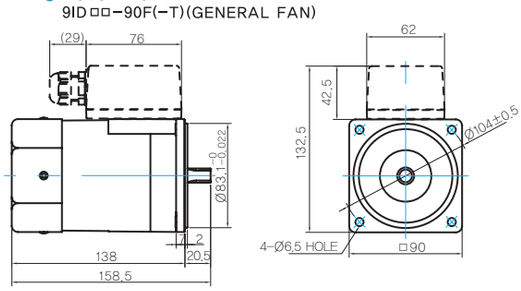

● MOTOR OUTPUT SHAFT

MODEL	SPEC
D-CUT TYPE 9IDD□-90F	
KEY TYPE 9IDK□-90F	

● KEY SPEC

MOTOR



INTER-DECIMAL GEARBOX

● MODEL: 9XD10□□



GEARED MOTOR

P TYPE GEARBOX

● MOTOR MODEL:
9IDG□-90FP(GENERAL FAN)

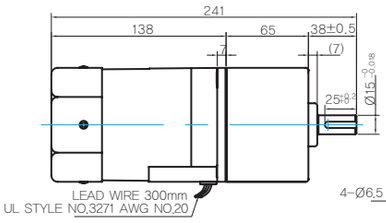

● GEARBOX MODEL:
9PBK□BH



● GEARBOX MODEL:
9PFK□BH

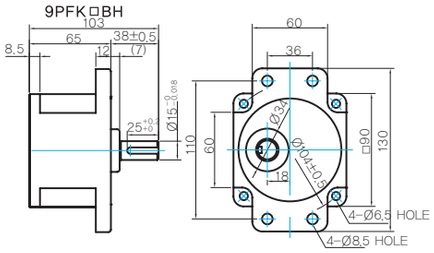

● GEARBOX OUTPUT SHAFT

MODEL	SPEC
KEY TYPE 9PBK□BH 9PFK□BH	

● KEY SPEC

GEARBOX



H TYPE GEARBOX

● MOTOR MODEL:
9IDG□-90FH (GENERAL FAN)

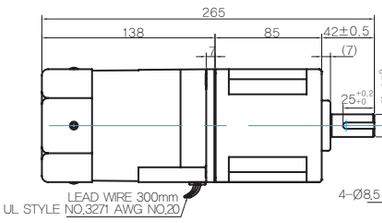

● GEARBOX MODEL:
9HBK□BH



● GEARBOX MODEL:
9HFK□BH

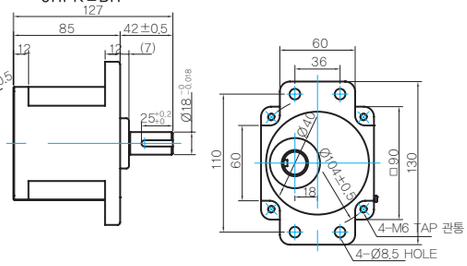

● GEARBOX OUTPUT SHAFT

MODEL	SPEC
KEY TYPE 9HBK□BH 9HFK□BH	

● KEY SPEC

GEARBOX



W TYPE GEARBOX

● MOTOR MODEL:
9IDG□-90FW(GENERAL FAN)

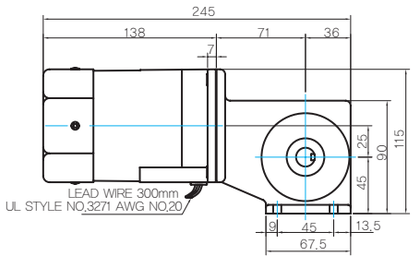

● GEARBOX MODEL:
9WD□BL/BR/BRL



● KEY SPEC

GEARBOX



WH TYPE GEARBOX

● MOTOR MODEL:
9IDG□-90FWH (GENERAL FAN)

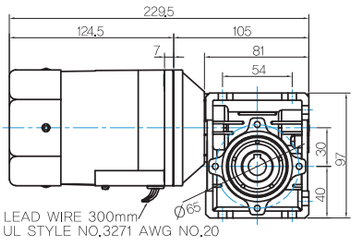

● GEARBOX MODEL:
9WHD□-030





● SHAFT



● FLANGE





● KEY SPEC



HC TYPE GEARBOX

● MOTOR MODEL :
9IDG□-90FHC (GENERAL FAN)

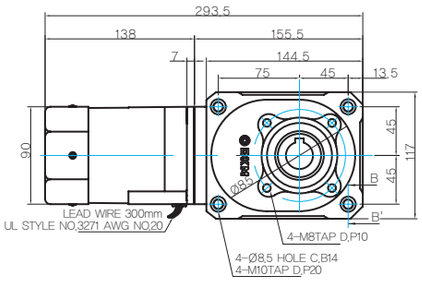

● GEARBOX MODEL:
9HC(15 ~ 60)□



● SHAFT

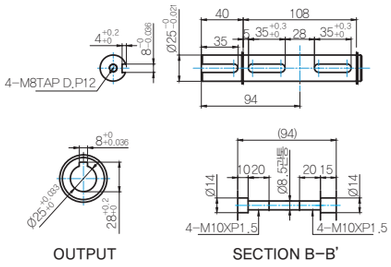

● MOTOR MODEL :
9IDG□-90FHC (GENERAL FAN)

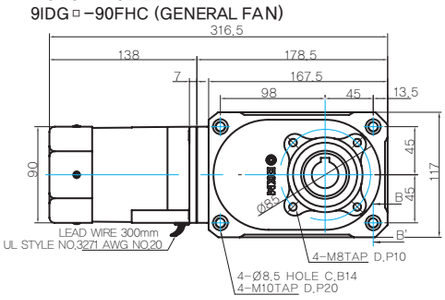

● GEARBOX MODEL :
9HC(80 ~ 240)□



● KEY SPEC



WEIGHT

PART		WEIGHT(kg)
MOTOR		3.05
GEAR BOX	9PB(F)K2BH - 9PB(F)K10BH	1.28
	9PB(F)K12.5BH - 9PB(F)K20BH	1.30
	9PB(F)K25BH - 9PB(F)K60BH	1.45
	9PB(F)K75BH - 9PB(F)K200BH	1.47
	9HB(F)K3BH - 9HB(F)K10BH	1.62
	9HB(F)K12.5BH - 9HB(F)K20BH	1.68
	9HB(F)K25BH - 9HB(F)K60BH	1.73
	9HB(F)K75BH - 9HB(F)K200BH	1.78
	9WD□BL/BR/BRL	1.00
	9WHD□-030	1.20
	9HC15-◇	4.05
	9HC20-◇ - 9HC60-◇	4.10
	9HC80-◇ - 9HC240-◇	4.75
	9XD10○○	0.60

*The output flange and shaft are sold separately.

B AC Motors

Induction Motor 90W(□90mm)

Motor Images

9IDD□-90F	9IDD□-90F-T	9IDG□-90FP+9PBK□BH	9IDG□-90FP+9PFK□BH

9IDG□-90FH+9HBK□BH	9IDG□-90FH+9HFK□BH	9IDG□-90FW+9WD□BL	9IDG□-90FWH+9WHD□-030

9IDG□-90FHC+9HC□□

Connection Diagrams

Lead Wire Type

[Single Phase]





[Three Phase]



* **CCW Direction:**
Change any two connections among R, S and T.

INPUT \ LEAD WIRE	U	V	W
3Φ 200V~230V (3, G, J)	WHITE	RED	BLACK
3Φ 380V~400V (4, K)	WHITE	BLUE	BLACK
3Φ 415V~440V (5, L)	WHITE	YELLOW	BLACK

Terminal Box Type

[Single Phase]





[Three Phase]



* **CCW Direction:**
Change any two connections among R, S and T.

INPUT \ LEAD WIRE	U	V	W
3Φ 200V~230V (3, G, J)	WHITE	RED	BLACK
3Φ 380V~400V (4, K)	WHITE	BLUE	BLACK
3Φ 415V~440V (5, L)	WHITE	YELLOW	BLACK

1) The direction of motor rotation is as viewed from the shaft end of the motor.
2) CW represents the clockwise direction, while CCW represents the counterclockwise direction.
3) Change the direction of single phase motor rotation only after bringing the motor to a stop. If an attempt is made to change the direction of rotation while the motor is rotating, the motor may ignore the reversing command or change its direction after some delay.

120W Induction Motor 120W(□ 90mm)

Motor Specification

Model (9IDG*-120F□(-T): Gear Type Shaft, 9IDD*-120F(-T): D-Cut Type Shaft, 9IDK*-120F(-T): Key Type Shaft)		Output	Voltage	Frequency	Poles	Duty	Starting Torque		Rated Load				Capacitor
Lead Wire Type	Terminal Box Type	W	V	Hz			kgfcm	N.m	Speed r/min	Current A	Torque kgfcm	Torque N.m	μF / VAC
9ID◇1(A)-120F□	9ID◇1(A)-120F□-T	120	1ø 110	60	4	Cont.	6.50	0.650	1600	2.00	7.31	0.731	25.0 / 250
9ID◇2(D)-120F□	9ID◇2(D)-120F□-T	120	1ø 220	60	4	Cont.	6.20	0.620	1600	1.04	7.31	0.731	6.0 / 450
9ID◇E-120F□	9ID◇E-120F□-T	120	1ø 220	50	4	Cont.	6.40	0.640	1250	0.90	9.35	0.935	6.0 / 450
			1ø 240				7.50	0.750		1.00	9.35	0.935	
9ID◇3(G)-120F□	9ID◇3(G)-120F□-T	120	3ø 220	50	4	Cont.	24.40	2.440	1300	0.88	8.99	0.899	–
				60			20.00	2.000	1600	0.71	7.31	0.731	
			3ø 230	50	4	Cont.	27.00	2.700	1350	0.86	8.66	0.866	
				60			21.70	2.170	1600	0.76	7.31	0.731	
9ID◇4(K)-120F□	9ID◇4(K)-120F□-T	120	3ø 380	50	4	Cont.	24.30	2.430	1300	0.50	8.99	0.899	–
				60			19.90	1.990	1600	0.41	7.31	0.731	
			3ø 400	50	4	Cont.	27.10	2.710	1350	0.49	8.66	0.866	
				60			21.90	2.190	1600	0.43	7.31	0.731	
9ID◇5(L)-120F□	9ID◇5(L)-120F□-T	120	3ø 415	50	4	Cont.	24.30	2.430	1300	0.47	8.99	0.899	–
				60			19.90	1.990	1600	0.37	7.31	0.731	
			3ø 440	50	4	Cont.	27.50	2.750	1350	0.47	8.66	0.866	
				60			22.20	2.220	1600	0.40	7.31	0.731	

1) Enter the phase & voltage code in the place * within the motor model name. 2) Enter the output shaft type of motor in the place ◇ (G: Gear Type / D: D-Cut Type / K: Key Type). and D-Cut Type / Key Type Shaft are for using the motor only. 3) If the motor output shaft type is Gear Type, □ contains the model type name of the gearbox being attached. 4) The phase & voltage code A, D, E, G, K, L contain a built-in thermal protector. 5) It is not possible to use an inverter for three phase 380~440V motor. When

Max. Permissible Torque at Output Shaft of Gearbox

60Hz

Motor Model	Gearbox Model	Gear Ratio	2	3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120	150	180	200
		r/min	900	600	500	360	300	240	200	180	144	120	100	90	72	60	50	45	36	30	24	20	18	15	12	10	9
9IDG*-120FP	9PBK□BH	kgfcm	11.8	17.8	21.3	29.6	35.5	44.4	53.3	59.2	66.7	80.0	96.0	106.7	120.5	144.6	173.6	192.9	200.0	200.0	200.0	200.0	200.0	200.0	200.0	200.0	200.0
	9PFK□BH	N.m	1.16	1.74	2.09	2.90	3.48	4.35	5.22	5.80	6.53	7.84	9.41	10.45	11.81	14.17	17.01	18.90	19.60	19.60	19.60	19.60	19.60	19.60	19.60	19.60	19.60
9IDG*-120FH	9HBK□BH	kgfcm	–	17.8	21.3	29.6	35.5	44.4	53.3	59.2	66.7	80.0	96.0	106.7	120.5	144.6	173.6	192.9	241.1	289.3	300.0	300.0	300.0	300.0	300.0	300.0	300.0
	9HFK□BH	N.m		1.74	2.09	2.90	3.48	4.35	5.22	5.80	6.53	7.84	9.41	10.45	11.81	14.17	17.01	18.90	23.62	28.35	29.40	29.40	29.40	29.40	29.40	29.40	29.40

Motor Model	Gearbox Model	Gear Ratio	10	12	15	18	25	30	36	50	60
		r/min	180	150	120	100	72	60	50	36	30
9IDG*-120FW	9WD□BL/□BR/□BRL	kgfcm	59.9	70.1	84.4	97.3	127.8	144.6	153.1	142.9	122.4
		N.m	5.87	6.87	8.27	9.54	12.53	14.17	15.00	14.00	12.00

Motor Model	Gearbox Model	Gear Ratio	5	7.5	10	15	20	25	30	40	50	60	80
		r/min	360	240	180	120	90	72	60	45	36	30	22
9IDG*-120FWH	9WHD□-030	kgfcm	25.4	36.8	47.3	66.6	84.2	96.4	112.2	137.9	157.8	163.3	132.7
		N.m	2.49	3.61	4.64	6.53	8.25	9.45	11.00	13.52	15.46	16.00	13.00

Motor Model	Gearbox Model	Gear Ratio	15	20	25	30	40	50	60	80	100	120	160	200	225	240
		r/min	120	90	72	60	45	36	30	22.5	18	15	11.3	9	8	7.5
9IDG*-120FHC	9HC□-◇	kgfcm	80.0	106.7	133.3	160.0	213.3	266.6	320.0	426.6	533.3	639.9	853.2	1066.5	1199.8	1279.8
		N.m	7.84	10.45	13.06	15.68	20.90	26.13	31.36	41.81	52.26	62.71	83.62	104.52	117.58	125.42

50Hz

Motor Model	Gearbox Model	Gear Ratio	2	3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120	150	180	200
		r/min	750	500	417	300	250	200	167	150	120	100	83	75	60	50	42	37.5	30	25	20	17	15	12.5	10	8	7.5
9IDG*-120FP	9PBK□BH	kgfcm	14.0	21.0	25.2	35.1	42.1	52.6	63.1	70.1	79.0	94.8	113.8	126.4	142.9	171.4	200.0	200.0	200.0	200.0	200.0	200.0	200.0	200.0	200.0	200.0	200.0
	9PFK□BH	N.m	1.37	2.06	2.47	3.44	4.12	5.15	6.19	6.87	7.74	9.29	11.15	12.39	14.00	16.80	19.60	19.60	19.60	19.60	19.60	19.60	19.60	19.60	19.60	19.60	19.60
9IDG*-120FH	9HBK□BH	kgfcm	–	21.0	25.2	35.1	42.1	52.6	63.1	70.1	79.0	94.8	113.8	126.4	142.9	171.4	205.7	228.6	285.7	300.0	300.0	300.0	300.0	300.0	300.0	300.0	300.0
	9HFK□BH	N.m		2.06	2.47	3.44	4.12	5.15	6.19	6.87	7.74	9.29	11.15	12.39	14.00	16.80	20.16	22.40	28.00	29.40	29.40	29.40	29.40	29.40	29.40	29.40	29.40

Motor Model	Gearbox Model	Gear Ratio	10	12	15	18	25	30	36	50	60
		r/min	150	125	100	83	60	50	42	30	25
9IDG*-120FW	9WD□BL/□BR/□BRL	kgfcm	71.0	83.1	100.0	115.3	151.5	170.0	153.1	142.9	122.4
		N.m	6.96	8.15	9.80	11.30	14.85	16.66	15.00	14.00	12.00

Motor Model	Gearbox Model	Gear Ratio	5	7.5	10	15	20	25	30	40	50	60	80
		r/min	300	200	150	100	75	60	50	38	30	25	18
9IDG*-120FWH	9WHD□-030	kgfcm	30.1	43.6	56.1	79.0	99.7	114.3	133.0	163.5	173.5	163.3	132.7
		N.m	2.95	4.28	5.50	7.74	9.77	11.20	13.03	16.02	17.00	16.00	13.00

Motor Model	Gearbox Model	Gear Ratio	15	20	25	30	40	50	60	80	100	120	160	200	225	240
		r/min	100	75	60	50	37.5	30	25	18.8	15	12.5	9.4	7.5	6.7	6.3
9IDG*-120FHC	9HC□-◇	kgfcm	94.8	126.4	158.0	189.6	252.8	316.0	379.2	505.6	632.0	758.4	1011.2	1264.0	1422.0	1516.8
		N.m	9.29	12.39	15.48	18.58	24.78	30.97	37.16	49.55	61.94	74.33	99.10	123.88	139.36	148.65

1) Enter the phase & voltage code in the place * within the motor model name. 2) Enter the gear ratio in the place of □ within the gearbox model name.
3) A colored background indicates the gear shaft rotation in the same direction as the motor shaft ; a white background indicates the rotation in the opposite direction.
4) The rotating speed is calculated by dividing the motor's synchronous speed (50Hz: 1,500r/min, 60Hz: 1,800r/min) by the gear ratio. The actual speed is 2~20% less than the displayed value, depending on the size of the load.

B AC Motors

Induction Motor 120W(□ 90mm)

Dimensions

MOTOR ONLY

● MOTOR MODEL:
9ID□□-120F(-T) (GENERAL FAN)

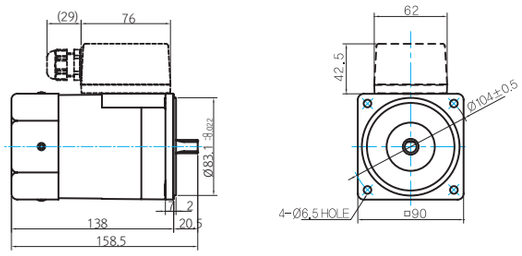

● MOTOR OUTPUT SHAFT

MODEL	SPEC
D-CUT TYPE	
9IDD□-120F	
KEY TYPE	
9IDK□-120F	

● KEY SPEC

MOTOR



INTER-DECIMAL GEARBOX

● MODEL:
9XD10□□



GEARED MOTOR

P TYPE GEARBOX

● MOTOR MODEL:
9IDG□-120FP (GENERAL FAN)

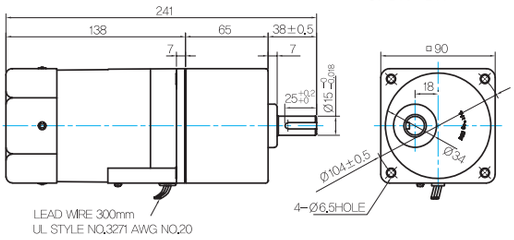

● GEARBOX MODEL:
9PBK□BH

● GEARBOX MODEL:
9PFK□BH

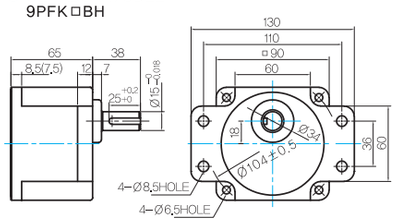

● GEARBOX OUTPUT SHAFT

MODEL	SPEC
KEY TYPE	
9PBK□BH 9PFK□BH	

● KEY SPEC

GEARBOX



H TYPE GEARBOX

● MOTOR MODEL:
9IDG□-120FH (GENERAL FAN)

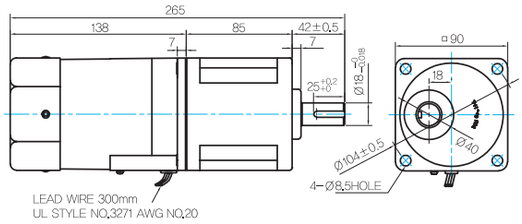

● GEARBOX MODEL:
9HBK□BH

● GEARBOX MODEL:
9HFK□BH

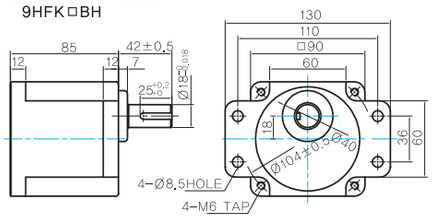

● GEARBOX OUTPUT SHAFT

MODEL	SPEC
KEY TYPE	
9HBK□BH 9HFK□BH	

● KEY SPEC

GEARBOX



W TYPE GEARBOX

● MOTOR MODEL:
9IDG□-120FW (GENERAL FAN)

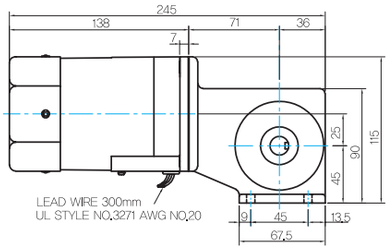

● GEARBOX MODEL:
9WD□BL/BR/BRL



● KEY SPEC

GEARBOX



WH TYPE GEARBOX

● MOTOR MODEL:
9IDG□-120FWH (GENERAL FAN)

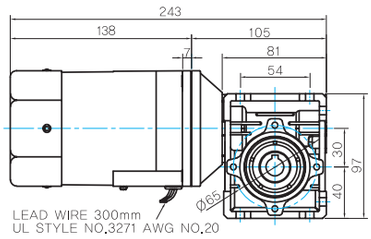

● GEARBOX MODEL:
9WHD□-030





● SHAFT



Unidirectional Bi-directional

● FLANGE

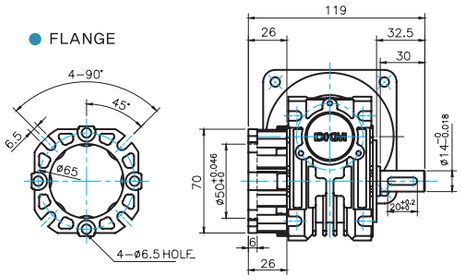

● KEY SPEC



HC TYPE GEARBOX

● MOTOR MODEL :
9IDG□-120FHC (GENERAL FAN)

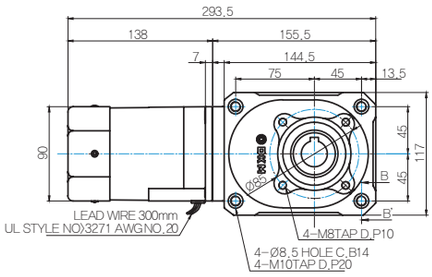

● GEARBOX MODEL:
9HC(15 ~ 60)□



● SHAFT

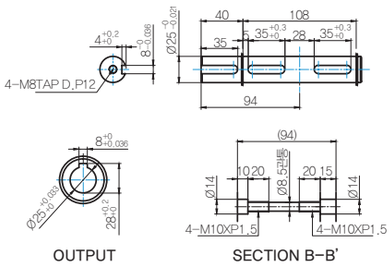

● MOTOR MODEL :
9IDG□-120FHC (GENERAL FAN)

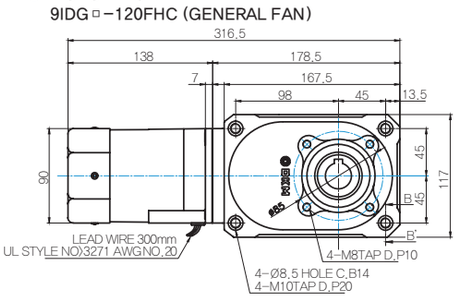

● GEARBOX MODEL :
9HC(80 ~ 240)□



● KEY SPEC



WEIGHT

PART		WEIGHT(kg)
MOTOR		3.05
GEAR BOX	9PB(F)K2BH - 9PB(F)K10BH	1.28
	9PB(F)K12.5BH - 9PB(F)K20BH	1.30
	9PB(F)K25BH - 9PB(F)K60BH	1.45
	9PB(F)K75BH - 9PB(F)K200BH	1.47
	9HB(F)K3BH - 9HB(F)K10BH	1.62
	9HB(F)K12.5BH - 9HB(F)K20BH	1.68
	9HB(F)K25BH - 9HB(F)K60BH	1.73
	9HB(F)K75BH - 9HB(F)K200BH	1.78
	9WD□BL/BR/BRL	1.00
	9WHD□-030	1.20
	9HC15-◇	4.05
	9HC20-◇ - 9HC60-◇	4.10
	9HC80-◇ - 9HC240-◇	4.75
	9XD10○○	0.60

*The output flange and shaft are sold separately.

B AC Motors

Induction Motor 120W(□90mm)

Motor Images

9IDD□-120F	9IDD□-120F-T	9IDG□-120FP+9PBK□BH	9IDG□-120FP+9PFK□BH

9IDG□-120FH+9HBK□BH	9IDG□-120FH+9HFK□BH	9IDG□-120FW+9WD□BL	9IDG□-120FWH+9WHD□-030

9IDG□-120FHC+9HC□□

Connection Diagrams

Lead Wire Type

[Single Phase]





[Three Phase]



* **CCW Direction:**
Change any two connections among R, S and T.

INPUT \ LEAD WIRE	U	V	W
3Φ 200V~230V (3, G, J)	WHITE	RED	BLACK
3Φ 380V~400V (4, K)	WHITE	BLUE	BLACK
3Φ 415V~440V (5, L)	WHITE	YELLOW	BLACK

Terminal Box Type

[Single Phase]





[Three Phase]



* **CCW Direction:**
Change any two connections among R, S and T.

INPUT \ LEAD WIRE	U	V	W
3Φ 200V~230V (3, G, J)	WHITE	RED	BLACK
3Φ 380V~400V (4, K)	WHITE	BLUE	BLACK
3Φ 415V~440V (5, L)	WHITE	YELLOW	BLACK

1) The direction of motor rotation is as viewed from the shaft end of the motor.
2) CW represents the clockwise direction, while CCW represents the counterclockwise direction.
3) Change the direction of single phase motor rotation only after bringing the motor to a stop. If an attempt is made to change the direction of rotation while the motor is rotating, the motor may ignore the reversing command or change its direction after some delay.

150W Induction Motor 150W(□ 90mm)

Motor Specification

Model 9IDG*-150F□(-T): Gear Type Shaft 9IDD*-150F(-T): D-Cut Type Shaft 9IDK*-150F(-T): Key Type Shaft Lead Wire Type	Terminal Box Type	Output W	Voltage V	Frequency Hz	Poles	Duty	Starting Torque kgfcm	Starting Torque N.m	Rated Load Speed r/min	Rated Load Current A	Rated Load Torque kgfcm	Rated Load Torque N.m	Capacitor μF / VAC
9ID◇3(G)-150F□	9ID◇3(G)-150F□-T	150	3ø 220	50	4	Cont.	25.70	2.570	1300	0.94	11.24	1.124	–
				60			20.50	2.050	1550	0.84	9.43	0.943	
			3ø 230	50	4	Cont.	27.50	2.750	1300	1.02	11.24	1.124	
				60			22.20	2.220	1550	0.89	9.43	0.943	
9ID◇4(K)-150F□	9ID◇4(K)-150F□-T	150	3ø 380	50	4	Cont.	25.10	2.510	1300	0.53	11.24	1.124	–
				60			20.00	2.000	1550	0.48	9.43	0.943	
			3ø 400	50	4	Cont.	27.30	2.730	1300	0.57	11.24	1.124	
				60			22.00	2.200	1550	0.50	9.43	0.943	
9ID◇5(L)-150F□	9ID◇5(L)-150F□-T	150	3ø 415	50	4	Cont.	25.00	2.500	1300	0.51	11.24	1.124	–
				60			22.10	2.210	1550	0.45	9.43	0.943	
			3ø 440	50	4	Cont.	27.20	2.720	1300	0.55	11.24	1.124	
				60			22.40	2.240	1550	0.48	9.43	0.943	

1) Enter the phase & voltage code in the place * within the motor model name. 2) Enter the output shaft type of motor in the place ◇ (G: Gear Type / D: D-Cut Type / K: Key Type), and D-Cut Type / Key Type Shaft are for using the motor only. 3) If the motor output shaft type is Gear Type, □ contains the model type name of the gearbox being attached. 4) The phase & voltage code G, K, L contain a built-in thermal protector. 5) It is not possible to use an inverter for three phase 380~440V motor. When the inverter is used, the insulation of winding coil becomes hot and may cause damage to the motor.

Max. Permissible Torque at Output Shaft of Gearbox

60Hz

Motor Model	Gearbox Model	Gear Ratio	3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120	150	180	200
		r/min	600	500	360	300	240	200	180	144	120	100	90	72	60	50	45	36	30	24	20	18	15	12	10	9
9IDG*-150FH	9HBK□BH	kgfcm	22.9	27.5	38.2	45.8	57.3	68.7	76.3	86.0	103.2	123.9	137.6	155.5	186.6	224.0	248.8	300.0	300.0	300.0	300.0	300.0	300.0	300.0	300.0	300.0
	9HFK□BH	N.m	2.24	2.69	3.74	4.49	5.61	6.73	7.48	8.43	10.11	12.14	13.49	15.24	18.29	21.95	24.39	29.40	29.40	29.40	29.40	29.40	29.40	29.40	29.40	29.40

Motor Model	Gearbox Model	Gear Ratio	5	7.5	10	15	20	25	30	40	50	60	80	100
		r/min	360	240	180	120	90	72	60	45	36	30	22	18
9IDG*-150FWH	9WHD□-030	kgfcm	32.8	47.5	61.1	86.0	108.6	124.4	144.8	178.0	173.5	163.3	132.7	–
		N.m	3.21	4.66	5.99	8.42	10.64	12.19	14.19	17.44	17.00	16.00	13.00	–
	9WHD□-040	kgfcm	–	–	–	–	–	–	–	–	230.0	257.9	295.0	270.0
		N.m	–	–	–	–	–	–	–	–	22.54	25.27	28.91	26.46

Motor Model	Gearbox Model	Gear Ratio	15	20	25	30	40	50	60	80	100	120	160	200	225	240
		r/min	120	90	72	60	45	36	30	22.5	18	15	11.3	9	8	7.5
9IDG*-150FHC	9HC□-◇	kgfcm	103.2	137.6	172.0	206.4	275.2	344.0	412.9	550.5	688.1	825.7	1100.9	1376.2	1548.2	1651.4
		N.m	10.11	13.49	16.86	20.23	26.97	33.72	40.46	53.95	67.43	80.92	107.89	134.86	151.72	161.84

50Hz

Motor Model	Gearbox Model	Gear Ratio	3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120	150	180	200
		r/min	500	417	300	250	200	167	150	120	100	83	75	60	50	42	37.5	30	25	20	17	15	12.5	10	8	7.5
9IDG*-150FH	9HBK□BH	kgfcm	27.3	32.8	45.5	54.6	68.3	81.9	91.0	102.6	123.1	147.7	164.1	185.4	222.5	267.0	296.7	300.0	300.0	300.0	300.0	300.0	300.0	300.0	300.0	300.0
	9HFK□BH	N.m	2.68	3.21	4.46	5.35	6.69	8.03	8.92	10.05	12.06	14.47	16.08	18.17	21.81	26.17	29.08	29.40	29.40	29.40	29.40	29.40	29.40	29.40	29.40	29.40

Motor Model	Gearbox Model	Gear Ratio	5	7.5	10	15	20	25	30	40	50	60	80	100
		r/min	300	200	150	100	75	60	50	38	30	25	18	15
9IDG*-150FWH	9WHD□-030	kgfcm	39.1	56.6	72.8	102.5	129.5	148.3	172.6	183.7	173.5	163.3	132.7	–
		N.m	3.83	5.55	7.14	10.04	12.69	14.54	16.92	18.00	17.00	16.00	13.00	–
	9WHD□-040	kgfcm	–	–	–	–	–	–	–	–	274.2	307.5	295.0	270.0
		N.m	–	–	–	–	–	–	–	–	26.87	30.13	28.91	26.46

Motor Model	Gearbox Model	Gear Ratio	15	20	25	30	40	50	60	80	100	120	160	200	225	240
		r/min	100	75	60	50	37.5	30	25	18.8	15	12.5	9.4	7.5	6.7	6.3
9IDG*-150FHC	9HC□-◇	kgfcm	123.1	164.1	205.1	246.1	328.2	410.2	492.2	656.3	820.4	984.5	1312.7	1640.8	1800.0	1800.0
		N.m	12.06	16.08	20.10	24.12	32.16	40.20	48.24	64.32	80.40	96.48	128.64	160.80	176.40	176.40

1) Enter the phase & voltage code in the place * within the motor model name. 2) Enter the gear ratio in the place of □ within the gearbox model name.
3) A colored background indicates the gear shaft rotation in the same direction as the motor shaft ; a white background indicates the rotation in the opposite direction.
4) The rotating speed is calculated by dividing the motor's synchronous speed (50Hz: 1,500r/min, 60Hz: 1,800r/min) by the gear ratio.
The actual speed is 2~20% less than the displayed value, depending on the size of the load.

B AC Motors

Induction Motor 150W(□90mm)

Dimensions

MOTOR ONLY

● MOTOR MODEL:
9ID□□-150F(-T) (GENERAL FAN)

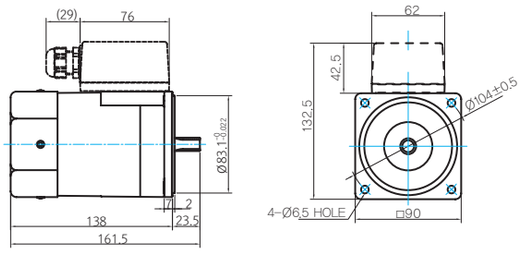

● MOTOR OUTPUT SHAFT

MODEL	SPEC
D-CUT TYPE	
9IDD□-150F	
KEY TYPE	
9IDK□-150F	

● KEY SPEC

MOTOR



GEARED MOTOR

H TYPE GEARBOX

● MOTOR MODEL:
9IDG□-150FH (GENERAL FAN)

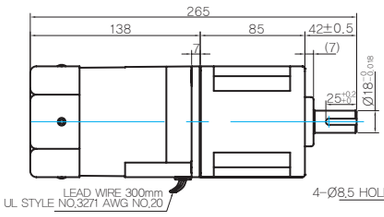

● GEARBOX MODEL:
9HBK□BH



● GEARBOX MODEL: 9HFK□BH

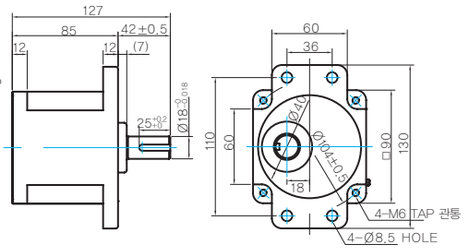

● GEARBOX OUTPUT SHAFT

MODEL	SPEC
KEY TYPE	
9HBK□BH 9HFK□BH	

● KEY SPEC

GEARBOX



WH TYPE GEARBOX

● MOTOR MODEL:
9IDG□-150FWH (GENERAL FAN)

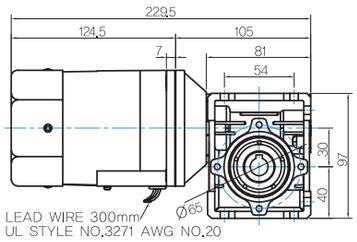

● GEARBOX MODEL:
9WHD□-030



● SHAFT

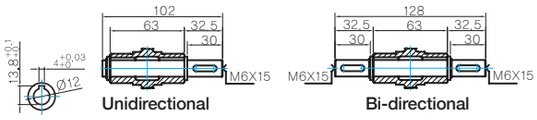

● KEY SPEC

GEARBOX



● FLANGE





● MOTOR MODEL:
9IDG□-150FWH (GENERAL FAN)

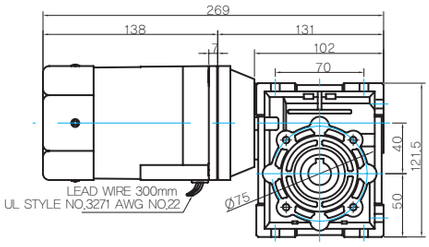

● GEARBOX MODEL:
9WHD□-040



● SHAFT

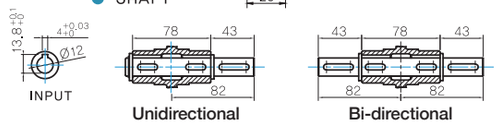

● FLANGE

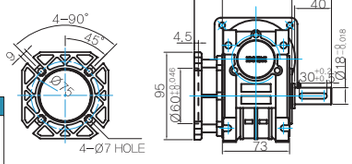

● KEY SPEC

GEARBOX



HC TYPE GEARBOX

● MOTOR MODEL :
9IDG□-150FHC (GENERAL FA N)

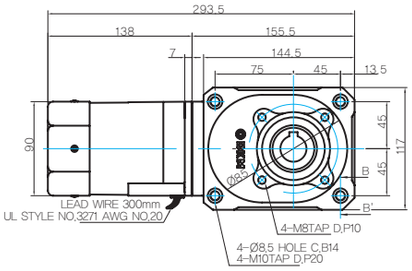

● GEARBOX MODEL:
9HC(15 ~ 60)□



● SHAFT

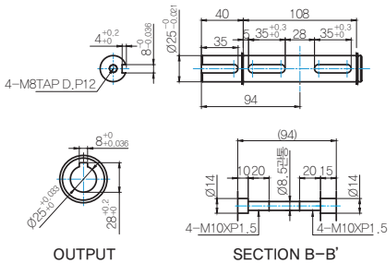

● MOTOR MODEL :
9IDG□-150FHC (GENERAL FA N)

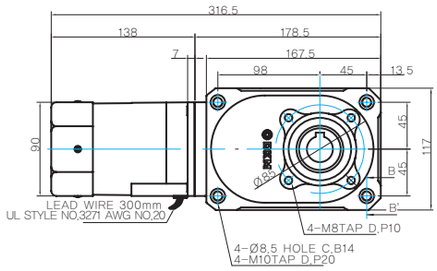

● GEARBOX MODEL :
9HC(80 ~ 240)□



● KEY SPEC

GEARBOX



WEIGHT

PART		WEIGHT(kg)
MOTOR		3.05
GEAR BOX	9HB(F)K3BH - 9HB(F)K10BH	1.62
	9HB(F)K12.5BH - 9HB(F)K20BH	1.68
	9HB(F)K25BH - 9HB(F)K60BH	1.73
	9HB(F)K75BH - 9HB(F)K200BH	1.78
	9WHD□-030	1.20
	9WHD□-040	2.10
	9HC15-◇	4.05
	9HC20-◇ - 9HC60-◇	4.10
	9HC80-◇ - 9HC240-◇	4.75
	9XD10○○	0.60

*The output flange and shaft are sold separately.

Motor Images

9IDD□-150F	9IDD□-150F-T	9IDG□-150FH+9HBK□BH	9IDG□-150FH+9HFK□BH	9IDG□-150FWH+9WHD□	9IDG□-150FHC+9HC□□

Connection Diagrams

Lead Wire Type



INPUT \ LEAD WIRE	U	V	W
3Φ 200V~230V (3, G, J)	WHITE	RED	BLACK
3Φ 380V~400V (4, K)	WHITE	BLUE	BLACK
3Φ 415V~440V (5, L)	WHITE	YELLOW	BLACK

* CCW Direction:
Change any two connections among R, S and T.

Terminal Box Type



INPUT \ LEAD WIRE	U	V	W
3Φ 200V~230V (3, G, J)	WHITE	RED	BLACK
3Φ 380V~400V (4, K)	WHITE	BLUE	BLACK
3Φ 415V~440V (5, L)	WHITE	YELLOW	BLACK

* CCW Direction:
Change any two connections among R, S and T.

1) The direction of motor rotation is as viewed from the shaft end of the motor.
2) CW represents the clockwise direction, while CCW represents the counterclockwise direction.

180W Induction Motor 180W(□90mm)

Motor Specification

Model 9IDG*-180F□(-T): Gear Type Shaft 9IDD*-180F(-T): D-Cut Type Shaft 9IDK*-180F(-T): Key Type Shaft		Output	Voltage	Frequency	Poles	Duty	Starting Torque		Rated Load				Capacitor
Lead Wire Type	Terminal Box Type	W	V	Hz			kgfcm	N.m	Speed r/min	Current A	Torque kgfcm	Torque N.m	μF / VAC
9ID◇1(A)-180F□	9ID◇1(A)-180F□-T	180	1ø 110	60	4	Cont.	7.40	0.740	1600	3.00	10.96	1.096	30.0 / 250
9ID◇2(D)-180F□	9ID◇2(D)-180F□-T	180	1ø 220	60	4	Cont.	7.80	0.780	1600	1.50	10.96	1.096	8.0 / 450
9ID◇E-180F□	9ID◇E-180F□-T	180	1ø 220	50	4	Cont.	8.10	0.810	1250	1.50	14.03	1.403	8.0 / 450
			1ø 240				9.70	0.970	1300	1.60	13.49	1.349	

1) Enter the phase & voltage code in the place * within the motor model name. 2) Enter the output shaft type of motor in the place ◇ (G: Gear Type / D: D-Cut Type / K: Key Type). and D-Cut Type / Key Type Shaft are for using the motor only.
3) If the motor output shaft type is Gear Type, □ contains the model type name of the gearbox being attached.
4) The phase & voltage code A, D, E contain a built-in thermal protector.

Max. Permissible Torque at Output Shaft of Gearbox

60Hz

Motor Model	Gearbox Model	Gear Ratio	3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120	150	180	200
		r/min	600	500	360	300	240	200	180	144	120	100	90	72	60	50	45	36	30	24	20	18	15	12	10	9
9IDG*-180FH	9HBK□BH	kgfcm	26.6	32.0	44.4	53.3	66.6	79.9	88.8	100.0	120.0	144.0	160.0	180.8	217.0	260.4	289.3	300.0	300.0	300.0	300.0	300.0	300.0	300.0	300.0	300.0
	9HFK□BH	N.m	2.61	3.13	4.35	5.22	6.52	7.83	8.70	9.80	11.76	14.11	15.68	17.72	21.26	25.51	28.35	29.40	29.40	29.40	29.40	29.40	29.40	29.40	29.40	29.40

Motor Model	Gearbox Model	Gear Ratio	5	7.5	10	15	20	25	30	40	50	60	80	100
		r/min	360	240	180	120	90	72	60	45	36	30	22	18
9IDG*-180FWH	9WHD□-030	kgfcm	38.1	55.2	71.0	99.9	126.2	144.6	168.3	183.7	173.5	163.3	132.7	–
		N.m	3.74	5.41	6.96	9.79	12.37	14.17	16.49	18.00	17.00	16.00	13.00	–
	9WHD□-040	kgfcm	–	–	–	–	–	–	–	–	267.4	299.8	295.0	270.0
		N.m	–	–	–	–	–	–	–	–	26.20	29.38	28.91	26.46

Motor Model	Gearbox Model	Gear Ratio	15	20	25	30	40	50	60	80	100	120	160	200	225	240
		r/min	120	90	72	60	45	36	30	22.5	18	15	11.3	9	8	7.5
9IDG*-180FHC	9HC□-◇	kgfcm	120.0	160.0	200.0	240.0	320.0	399.9	479.9	639.9	799.9	959.9	1279.8	1599.8	1799.8	1800.0
		N.m	11.76	15.68	19.60	23.52	31.36	39.19	47.03	62.71	78.39	94.07	125.42	156.78	176.38	176.40

50Hz

Motor Model	Gearbox Model	Gear Ratio	3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120	150	180	200
		r/min	500	417	300	250	200	167	150	120	100	83	75	60	50	42	37.5	30	25	20	17	15	12.5	10	8	7.5
9IDG*-180FH	9HBK□BH	kgfcm	32.8	39.3	54.6	65.5	81.9	98.3	109.2	123.1	147.7	177.2	196.9	222.5	267.0	300.0	300.0	300.0	300.0	300.0	300.0	300.0	300.0	300.0	300.0	300.0
	9HFK□BH	N.m	3.21	3.85	5.35	6.42	8.03	9.63	10.71	12.06	14.47	17.37	19.30	21.81	26.17	29.40	29.40	29.40	29.40	29.40	29.40	29.40	29.40	29.40	29.40	29.40

Motor Model	Gearbox Model	Gear Ratio	5	7.5	10	15	20	25	30	40	50	60	80	100
		r/min	300	240	180	120	90	72	60	45	36	30	22	18
9IDG*-180FWH	9WHD□-030	kgfcm	46.9	68.0	87.4	123.0	155.4	178.0	204.1	183.7	173.5	163.3	132.7	–
		N.m	4.60	6.66	8.56	12.05	15.23	17.45	20.00	18.00	17.00	16.00	13.00	–
	9WHD□-040	kgfcm	–	–	–	–	–	–	–	–	329.1	330.0	295.0	270.0
		N.m	–	–	–	–	–	–	–	–	32.25	32.34	28.91	26.46

Motor Model	Gearbox Model	Gear Ratio	15	20	25	30	40	50	60	80	100	120	160	200	225	240
		r/min	100	75	60	50	37.5	30	25	18.8	15	12.5	9.4	7.5	6.7	6.3
9IDG*-180FHC	9HC□-◇	kgfcm	147.7	196.9	246.1	295.3	393.8	492.2	590.7	787.6	984.5	1181.4	1575.2	1800.0	1800.0	1800.0
		N.m	14.47	19.30	24.12	28.94	38.59	48.24	57.89	77.18	96.48	115.78	154.37	176.40	176.40	176.40

1) Enter the phase & voltage code in the place * within the motor model name.
2) Enter the gear ratio in the place of □ within the gearbox model name.
3) A colored background indicates the gear shaft rotation in the same direction as the motor shaft; a white background indicates the rotation in the opposite direction.
4) The rotating speed is calculated by dividing the motor's synchronous speed (50Hz: 1,500r/min, 60Hz: 1,800r/min) by the gear ratio.
The actual speed is 2~20% less than the displayed value, depending on the size of the load.

Dimensions

MOTOR ONLY

● MOTOR MODEL:
9ID□□-180F(-T) (GENERAL FAN)

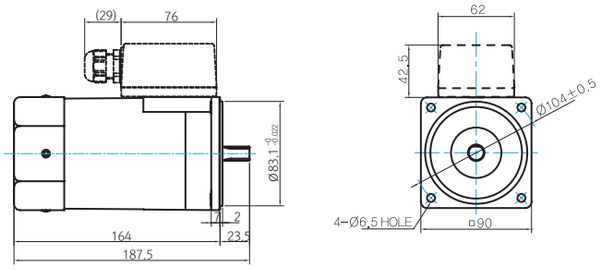

● MOTOR OUTPUT SHAFT

MODEL	SPEC
D-CUT TYPE	
9IDD□-180F	
KEY TYPE	
9IDK□-180F	

● KEY SPEC

MOTOR



GEARED MOTOR

H TYPE GEARBOX

● MOTOR MODEL:
9IDG□-180FH (GENERAL FAN)

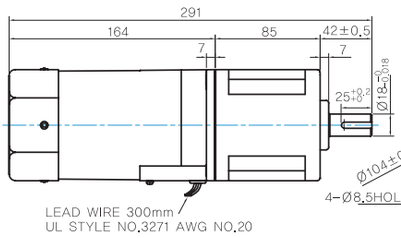

● GEARBOX MODEL:
9HBK□BH



● GEARBOX MODEL:
9HFK□BH

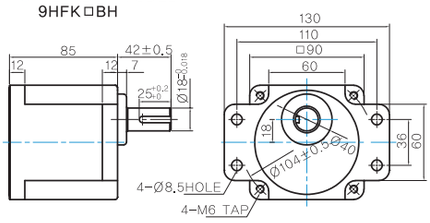

● GEARBOX OUTPUT SHAFT

MODEL	SPEC
KEY TYPE	
9HBK□BH 9HFK□BH	

● KEY SPEC

GEARBOX



WH TYPE GEARBOX

● MOTOR MODEL:
9IDG□-180FWH (GENERAL FAN)

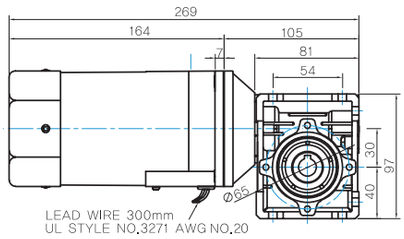

● GEARBOX MODEL:
9WHD□-030



● SHAFT

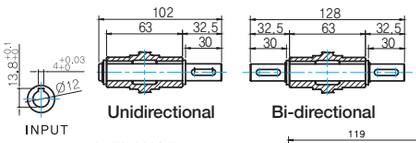

● FLANGE

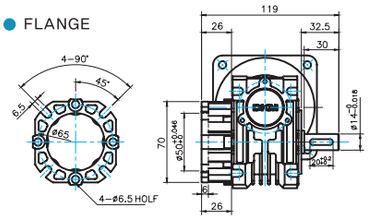

● MOTOR MODEL:
9IDG□-180FWH (GENERAL FAN)

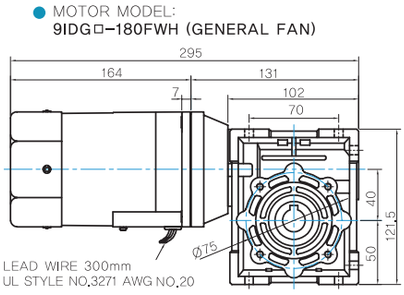

● GEARBOX MODEL:
9WHD□-040

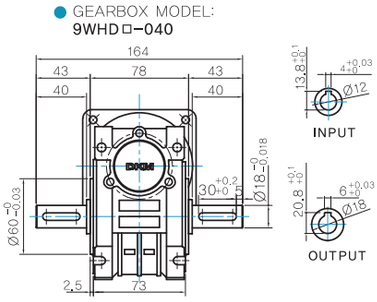

● KEY SPEC

GEARBOX



● FLANGE



● KEY SPEC

GEARBOX



● SHAFT

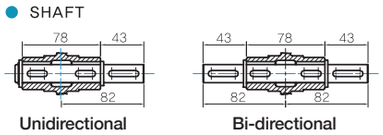

B AC Motors

Induction Motor 180W(□ 90mm)

HC TYPE GEARBOX

- MOTOR MODEL : 9IDG□-180FHC (GENERAL FAN)

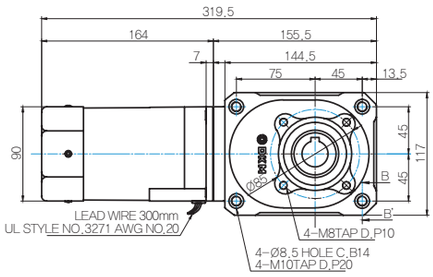

- GEARBOX MODEL: 9HC(15 ~ 60)□



- SHAFT

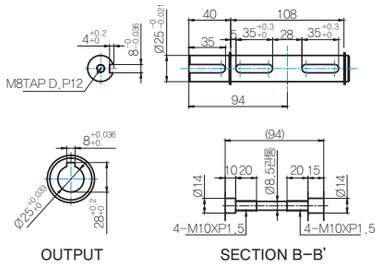

- MOTOR MODEL : 9IDG□-180FHC (GENERAL FAN)

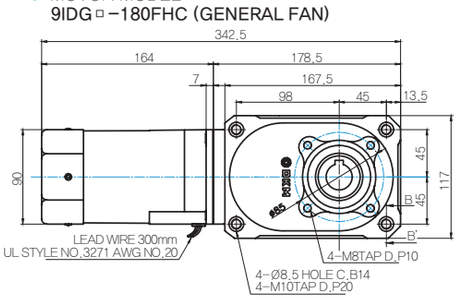

- GEARBOX MODEL : 9HC(80 ~ 240)□



- KEY SPEC

GEARBOX



WEIGHT

PART		WEIGHT(kg)
MOTOR		3.05
GEAR BOX	9HB(F)K3BH - 9HB(F)K10BH	1.62
	9HB(F)K12.5BH - 9HB(F)K20BH	1.68
	9HB(F)K25BH - 9HB(F)K60BH	1.73
	9HB(F)K75BH - 9HB(F)K200BH	1.78
	9WHD□-030	1.20
	9WHD□-040	2.10
	9HC15-◇	4.05
	9HC20-◇ - 9HC60-◇	4.10
	9HC80-◇ - 9HC240-◇	4.75
	9XD10○○	0.60

*The output flange and shaft are sold separately.

Motor Images

9IDD□-150F	9IDD□-150F-T	9IDG□-150FH+9HBK□BH	9IDG□-150FH+9HFK□BH	9IDG□-150FWH+9WHD□	9IDG□-180FHC+9HC□□

Connection Diagrams

Lead Wire Type	Terminal Box Type
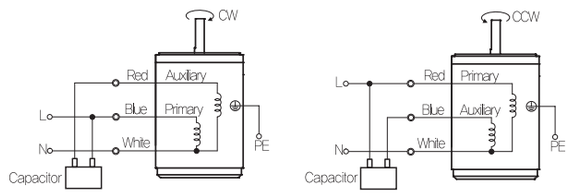	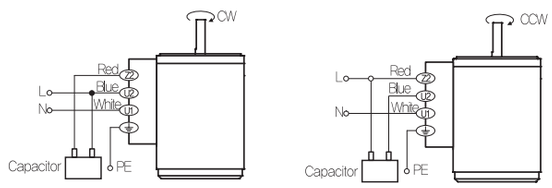

1) The direction of motor rotation is as viewed from the shaft end of the motor. 2) CW represents the clockwise direction, while CCW represents the counterclockwise direction. 3) Change the direction of single phase motor rotation only after bringing the motor to a stop. If an attempt is made to change the direction of rotation while the motor is rotating, the motor may ignore the reversing command or change its direction after some delay.

200W Induction Motor 200W(□90mm)

Motor Specification

Model (9IDG*-200F□(-T): Gear Type Shaft, 9IDD*-200F(-T): D-Cut Type Shaft, 9IDK*-200F(-T): Key Type Shaft) Lead Wire Type	Terminal Box Type	Output W	Voltage V	Frequency Hz	Poles	Duty	Starting Torque kgfcm	Starting Torque N.m	Rated Load Speed r/min	Rated Load Current A	Rated Load Torque kgfcm	Rated Load Torque N.m	Capacitor μF / VAC
9ID◇3(G)-200F□	9ID◇3(G)-200F□-T	200	3ø 220	50	4	Cont.	36.10	3.610	1300	1.27	14.98	1.498	–
				60			30.10	3.010	1550	1.17	12.57	1.257	
			3ø 230	50	4	Cont.	39.70	3.970	1300	1.33	14.98	1.498	
				60			32.60	3.260	1550	1.21	12.57	1.257	
9ID◇4(K)-200F□	9ID◇4(K)-200F□-T	200	3ø 380	50	4	Cont.	39.70	3.970	1300	0.74	14.98	1.498	–
				60			31.10	3.110	1550	0.67	12.57	1.257	
			3ø 400	50	4	Cont.	41.20	4.120	1300	0.81	14.98	1.498	
				60			35.10	3.510	1550	0.70	12.57	1.257	
9ID◇5(L)-200F□	9ID◇5(L)-200F□-T	200	3ø 415	50	4	Cont.	38.40	3.840	1300	0.70	14.98	1.498	–
				60			31.10	3.110	1550	0.62	12.57	1.257	
			3ø 440	50	4	Cont.	42.00	4.200	1300	0.76	14.98	1.498	
				60			34.60	3.460	1550	0.66	12.57	1.257	

1) Enter the phase & voltage code in the place * within the motor model name. 2) Enter the output shaft type of motor in the place ◇ (G: Gear Type / D: D-Cut Type / K: Key Type), and D-Cut Type / Key Type Shaft are for using the motor only. 3) If the motor output shaft type is Gear Type, □ contains the model type name of the gearbox being attached. 4) The phase & voltage code G, K, L contain a built-in thermal protector. 5) It is not possible to use an inverter for three phase 380~440V motor. When the inverter is used, the insulation of winding coil becomes hot and may cause damage to the motor.

Max. Permissible Torque at Output Shaft of Gearbox

60Hz

Motor Model	Gearbox Model	Gear Ratio	3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120	150	180	200
		r/min	600	500	360	300	240	200	180	144	120	100	90	72	60	50	45	36	30	24	20	18	15	12	10	9
9IDG*-200FH	9HBK□BH	kgfcm	30.5	36.6	50.9	61.1	76.3	91.6	101.8	114.7	137.6	165.1	183.5	207.4	248.8	298.6	300.0	300.0	300.0	300.0	300.0	300.0	300.0	300.0	300.0	300.0
	9HFK□BH	N.m	2.99	3.59	4.99	5.99	7.48	8.98	9.98	11.24	13.49	16.18	17.98	20.32	24.39	29.26	29.40	29.40	29.40	29.40	29.40	29.40	29.40	29.40	29.40	29.40

Motor Model	Gearbox Model	Gear Ratio	5	7.5	10	15	20	25	30	40	50	60	80	100
		r/min	360	240	180	120	90	72	60	45	36	30	22	18
9IDG*-200FWH	9WHD□-030	kgfcm	43.7	63.3	81.4	114.6	144.8	165.9	193.0	183.7	173.5	163.3	132.7	–
		N.m	4.29	6.21	7.98	11.23	14.19	16.26	18.92	18.00	17.00	16.00	13.00	–
	9WHD□-040	kgfcm	–	–	–	–	–	–	–	–	306.7	330.0	295.0	270.0
		N.m	–	–	–	–	–	–	–	–	30.05	32.34	28.91	26.46

Motor Model	Gearbox Model	Gear Ratio	15	20	25	30	40	50	60	80	100	120	160	200	225	240
		r/min	120	90	72	60	45	36	30	22.5	18	15	11.3	9	8	7.5
9IDG*-200FHC	9HC□-◇	kgfcm	137.6	183.5	229.4	275.2	367.0	458.7	550.5	734.0	917.4	1100.9	1467.9	1800.0	1800.0	1800.0
		N.m	13.49	17.98	22.48	26.97	35.96	44.95	53.95	71.93	89.91	107.89	143.86	176.40	176.40	176.40

50Hz

Motor Model	Gearbox Model	Gear Ratio	3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120	150	180	200
		r/min	500	417	300	250	200	167	150	120	100	83	75	60	50	42	37.5	30	25	20	17	15	12.5	10	8	7.5
9IDG*-200FH	9HBK□BH	kgfcm	36.4	43.7	60.7	72.8	91.0	109.2	121.4	136.7	164.1	196.9	218.8	247.2	296.7	300.0	300.0	300.0	300.0	300.0	300.0	300.0	300.0	300.0	300.0	300.0
	9HFK□BH	N.m	3.57	4.28	5.95	7.14	8.92	10.71	11.89	13.40	16.08	19.30	21.44	24.23	29.08	29.40	29.40	29.40	29.40	29.40	29.40	29.40	29.40	29.40	29.40	29.40

Motor Model	Gearbox Model	Gear Ratio	5	7.5	10	15	20	25	30	40	50	60	80	100
		r/min	300	200	150	100	75	60	50	38	30	25	18	15
9IDG*-200FWH	9WHD□-030	kgfcm	52.1	75.5	97.1	136.7	172.6	183.7	204.1	183.7	173.5	163.3	132.7	–
		N.m	5.11	7.40	9.52	13.39	16.92	18.00	20.00	18.00	17.00	16.00	13.00	–
	9WHD□-040	kgfcm	–	–	–	–	–	–	–	–	350.0	330.0	295.0	270.0
		N.m	–	–	–	–	–	–	–	–	34.30	32.34	28.91	26.46

Motor Model	Gearbox Model	Gear Ratio	15	20	25	30	40	50	60	80	100	120	160	200	225	240
		r/min	100	75	60	50	37.5	30	25	18.8	15	12.5	9.4	7.5	6.7	6.3
9IDG*-200FHC	9HC□-◇	kgfcm	164.1	218.8	273.5	328.2	437.6	546.9	656.3	875.1	1093.9	1312.7	1750.2	1800.0	1800.0	1800.0
		N.m	16.08	21.44	26.80	32.16	42.88	53.60	64.32	85.76	107.20	128.64	171.52	176.40	176.40	176.40

1) Enter the phase & voltage code in the place * within the motor model name. 2) Enter the gear ratio in the place of □ within the gearbox model name.
3) A colored background indicates the gear shaft rotation in the same direction as the motor shaft; a white background indicates the rotation in the opposite direction.
4) The rotating speed is calculated by dividing the motor's synchronous speed (50Hz: 1,500r/min, 60Hz: 1,800r/min) by the gear ratio. The actual speed is 2~20% less than the displayed value, depending on the size of the load.

B AC Motors

Induction Motor 200W(□90mm)

Dimensions

MOTOR ONLY

● MOTOR MODEL:
9ID□□-200F(-T) (GENERAL FAN)

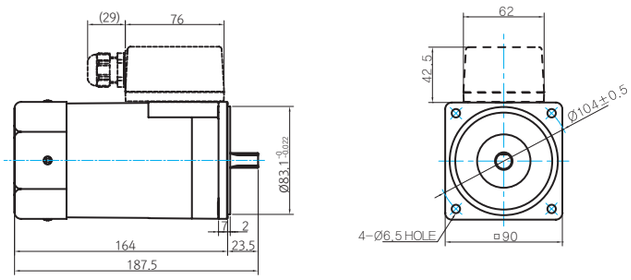

● MOTOR OUTPUT SHAFT

MODEL	SPEC
D-CUT TYPE	
9IDD□-200F	
KEY TYPE	
9IDK□-200F	

● KEY SPEC



GEARED MOTOR

H TYPE GEARBOX

● MOTOR MODEL:
9IDG□-200FH (GENERAL FAN)

● GEARBOX MODEL:
9HBK□BH

● GEARBOX MODEL:
9HFK□BH

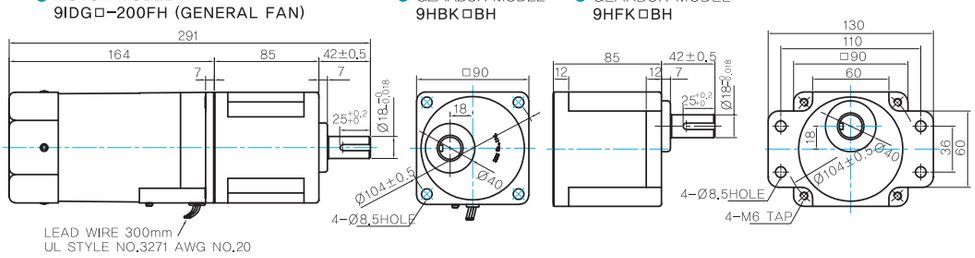

● GEARBOX OUTPUT SHAFT

MODEL	SPEC
KEY TYPE	
9HBK□BH 9HFK□BH	



WH TYPE GEARBOX

● MOTOR MODEL:
9IDG□-200FWH (GENERAL FAN)

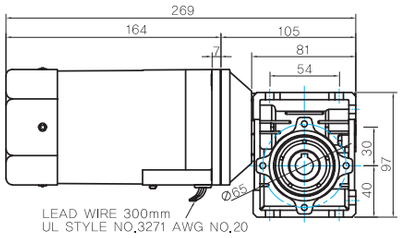

● GEARBOX MODEL:
9WHD□-030



● SHAFT

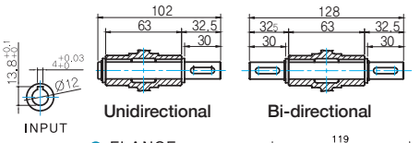

● FLANGE

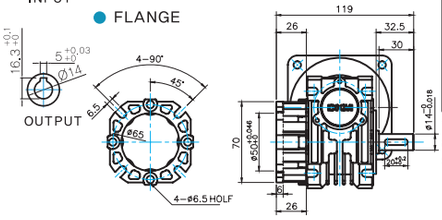

● KEY SPEC



*The output flange and shaft are sold separately.

● MOTOR MODEL:
9IDG□-200FWH (GENERAL FAN)

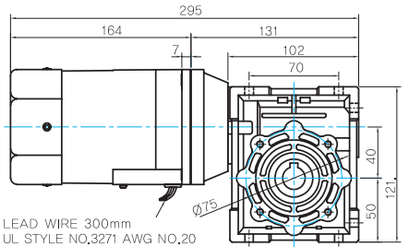

● GEARBOX MODEL:
9WHD□-040



● SHAFT

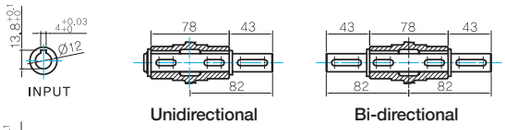

● FLANGE



● KEY SPEC



HC TYPE GEARBOX

● MOTOR MODEL :
9IDG□-200FHC (GENERAL FAN)

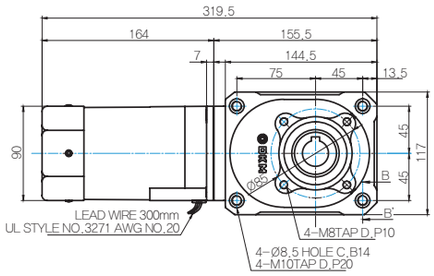

● GEARBOX MODEL:
9HC(15 ~ 60)□



● SHAFT

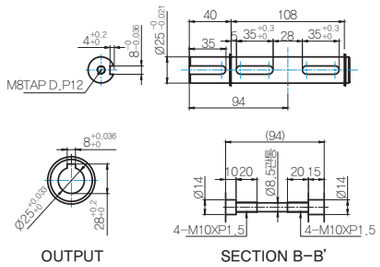

● MOTOR MODEL :
9IDG□-200FHC (GENERAL FAN)

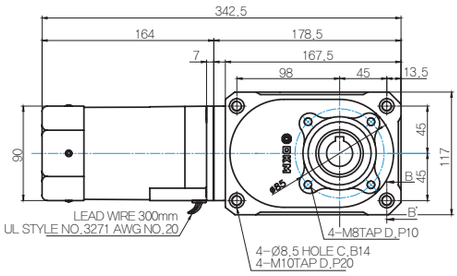

● GEARBOX MODEL :
9HC(80 ~ 240)□



● KEY SPEC

GEARBOX



WEIGHT

PART		WEIGHT(kg)
MOTOR		3.05
GEAR BOX	9HB(F)K3BH - 9HB(F)K10BH	1.62
	9HB(F)K12.5BH - 9HB(F)K20BH	1.68
	9HB(F)K25BH - 9HB(F)K60BH	1.73
	9HB(F)K75BH - 9HB(F)K200BH	1.78
	9WHD□-030	1.20
	9WHD□-040	2.10
	9HC15-◇	4.05
	9HC20-◇ - 9HC60-◇	4.10
	9HC80-◇ - 9HC240-◇	4.75
	9XD10○○	0.60

*The output flange and shaft are sold separately.

Motor Images

9IDD□-200F	9IDD□-200F-T	9IDG□-200FH+9HBK□BH	9IDG□-200FH+9HFK□BH	9IDG□-200FWH+9WHD□	9IDG□-200FHC+9HC□□

Connection Diagrams

Lead Wire Type



INPUT \ LEAD WIRE	U	V	W
3Φ 200V-230V (3, G, J)	WHITE	RED	BLACK
3Φ 380V-400V (4, K)	WHITE	BLUE	BLACK
3Φ 415V-440V (5, L)	WHITE	YELLOW	BLACK

* CCW Direction:
Change any two connections among R, S and T.

Terminal Box Type



INPUT \ LEAD WIRE	U	V	W
3Φ 200V-230V (3, G, J)	WHITE	RED	BLACK
3Φ 380V-400V (4, K)	WHITE	BLUE	BLACK
3Φ 415V-440V (5, L)	WHITE	YELLOW	BLACK

* CCW Direction:
Change any two connections among R, S and T.

1) The direction of motor rotation is as viewed from the shaft end of the motor.
2) CW represents the clockwise direction, while CCW represents the counterclockwise direction.

Induction Motor 250W(□104mm)

250W

Induction
Motor
250W(□104mm)

Motor Specification

Model 10IDGE-250F□-T: Gear Type Shaft 10IDDE-250F-T: D-Cut Type Shaft 10IDKE-250F-T: Key Type Shaft Terminal Box Type	Output W	Voltage V	Frequency Hz	Poles	Duty	Starting Torque kgfcm	Starting Torque N.m	Rated Load Speed r/min	Rated Load Current A	Rated Load Torque kgfcm	Rated Load Torque N.m	Capacitor μF / VAC
10ID◇E-250F□-T	250	1Ø 220	50	4	Cont.	11.00	1.100	1250	2.29	19.48	1.948	13.0/450
		1Ø 240				13.50	1.350	1300	2.17	18.74	1.874	

1) Enter the output shaft type of motor in the place ◇ (G: Gear Type / D: D-Cut Type / K: Key Type). and D-Cut Type / Key Type Shaft are for using the motor only.
2) If the motor output shaft type is Gear Type, □ contains the model type name of the gearbox being attached.
3) The phase & voltage code E contains a built-in thermal protector.

Max. Permissible Torque at Output Shaft of Gearbox

50Hz

Motor Model	Gearbox Model	Gear Ratio	3	5	9	10	15	20	25	30	40	50	60	90	100	120	150	180
		r/min	500	300	167	150	100	75	60	50	37.5	30	25	16.7	15	12.5	10	8.3
10IDGE-250FU-T	10UBK□BH	kgfcm	50.0	80.0	145.0	150.0	220.0	270.0	335.0	400.0	400.0	400.0	400.0	400.0	400.0	400.0	400.0	400.0
		N.m	4.90	7.84	14.21	14.70	21.56	26.46	32.83	39.20	39.20	39.20	39.20	39.20	39.20	39.20	39.20	39.20

Motor Model	Gearbox Model	Gear Ratio	5	7.5	10	15	20	25	30	40
		r/min	300	200	150	100	75	60	50	38
10IDKE-250F-T	10WHD□-040	kgfcm	70.0	100.0	130.0	185.0	240.0	290.0	325.0	305.0
		N.m	6.86	9.80	12.74	18.13	23.52	28.42	31.85	29.89

Motor Model	Gearbox Model	Gear Ratio	15	20	25	30	40	50	60	80	100	120	160	200	225	240
		r/min	100	75	60	50	37.5	30	25	18.8	15	12.5	9.4	7.5	6.7	6.3
10IDGE-250FHC-T	10HC□-◇	kgfcm	213.3	284.4	355.5	426.6	568.8	711.0	853.2	1137.6	1422.0	1706.4	2275.3	2844.1	3000.0	3000.0
		N.m	20.90	27.87	34.84	41.81	55.74	69.68	83.62	111.49	139.36	167.23	222.98	278.72	294.00	294.00

1) Enter the gear ratio in the place of □ within the gearbox model name.
2) A colored background indicates the gear shaft rotation in the same direction as the motor shaft; a white background indicates the rotation in the opposite direction.
3) The rotating speed is calculated by dividing the motor's synchronous speed (50Hz: 1,500r/min, 60Hz: 1,800r/min) by the gear ratio.
The actual speed is 2~20% less than the displayed value, depending on the size of the load.

Dimensions

MOTOR ONLY

● MOTOR MODEL:
10ID□E-250F-T

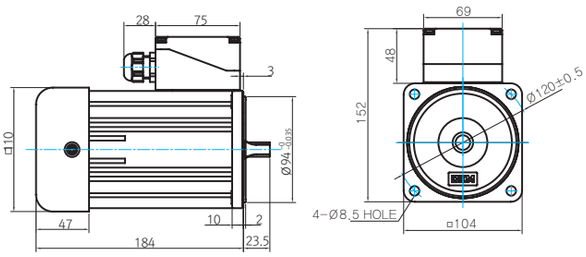

● MOTOR OUTPUT SHAFT

MODEL	SPEC
D-CUT TYPE	
10IDD□-250F	
KEY TYPE	
10IDK□-250F	

● KEY SPEC

MOTOR


GEARED MOTOR

U TYPE GEARBOX

● MOTOR MODEL:
10IDGE-250FU-T

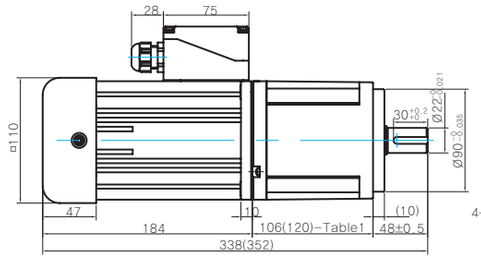

● GEARBOX MODEL:
10UBK□BH



● GEARBOX OUTPUT SHAFT

MODEL	SPEC
KEY TYPE	
10UBK□BH	

● KEY SPEC

GEARBOX


● 106(120)-Table1

SIZE(mm)	GEAR RATIO
106	10UBK3BH – 10UBK60BH
120	10UBK90BH – 10UBK180BH

WH TYPE GEARBOX

● MOTOR MODEL:
10IDKE-250F-T

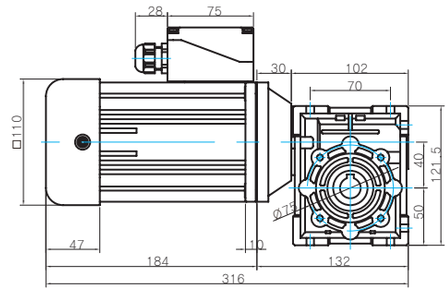

● GEARBOX MODEL:
10WHD□-040



● SHAFT



Unidirectional Bi-directional

● FLANGE

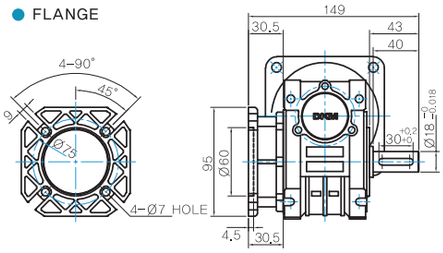

● KEY SPEC

GEARBOX


B AC Motors

Induction Motor 250W(□104mm)

HC TYPE GEARBOX

● GEARBOX MODEL : 10IDGE-250FHC-T (GENERAL FAN)

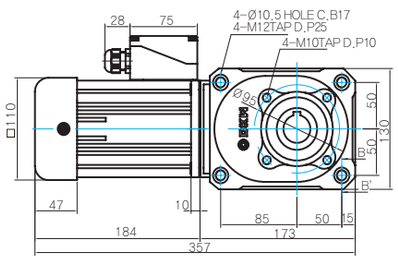

● GEARBOX MODEL : 10HC(15~60)□



● SHAFT

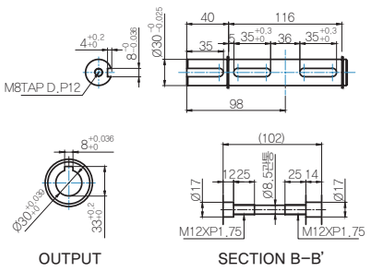

● GEARBOX MODEL : 10IDGE-250FHC-T (GENERAL FAN)

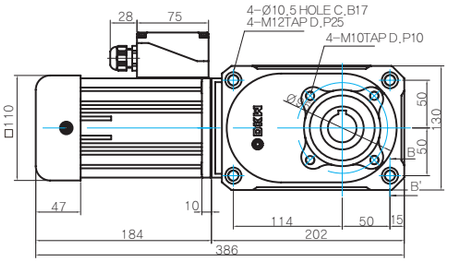

● GEARBOX MODEL : 10HC(80~240)□



● KEY SPEC



WEIGHT

PART		WEIGHT(kg)
MOTOR		6.10
GEAR BOX	10UBK3BH - 10UBK9BH	2.00
	10UBK10BH - 10UBK15BH	2.15
	10UBK20BH - 10UBK60BH	2.30
	10UBK90BH - 10UBK180BH	2.50
	10WHD□-040	2.20
	10HC15-◇	5.50
	10HC20-◇ - 10HC60-◇	5.60
	10HC80-◇ - 10HC240-◇	6.40

*The output flange and shaft are sold separately.

Motor Images

10IDKE-250F-T	10IDGE-250FU-T+10UBK□BH	10IDKE-250F-T+10WHD□-040	10IDGE-250FHC-T+10HC□□

Connection Diagrams

Terminal Box Type

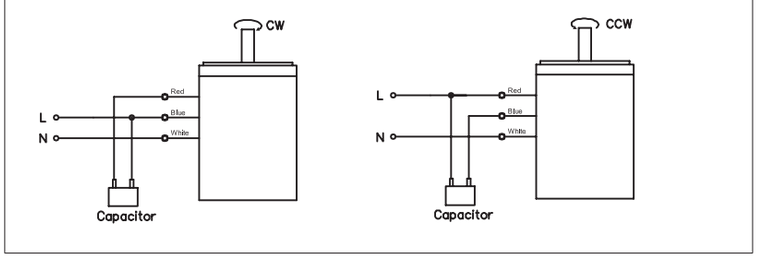

1) The direction of motor rotation is as viewed from the shaft end of the motor.
2) CW represents the clockwise direction, while CCW represents the counterclockwise direction.

300W Induction Motor 300W(□104mm)

Motor Specification

Model 10IDG*-300F□-T: Gear Type Shaft 10IDD*-300F-T: D-Cut Type Shaft 10IDK*-300F-T: Key Type Shaft Terminal Box Type	Output W	Voltage V	Frequency Hz	Poles	Duty	Starting Torque kgfcm	Starting Torque N.m	Rated Load Speed r/min	Rated Load Current A	Rated Load Torque kgfcm	Rated Load Torque N.m	Capacitor μF / VAC
10ID◇D-300F□-T	300	1Ø 220	60	4	Cont.	13.60	1.360	1600	2.52	18.27	1.827	15.0 / 450
10ID◇7-300F□-T	300	3Ø 230	50	4	Cont.	47.00	4.793	1300	1.70	22.48	2.248	–
		3Ø 400				47.00	4.793	1300	1.01	22.48	2.248	
10ID◇8-300F□-T	300	3Ø 440	50	4	Cont.	47.00	4.793	1300	0.88	22.48	2.248	–
			60			35.00	3.500	1550	0.88	18.86	1.886	

1) Enter the phase & voltage code in the place * within the motor model name. 2) Enter the output shaft type of motor in the place ◇ (G: Gear Type / D: D-Cut Type / K: Key Type). and D-Cut Type / Key Type Shaft are for using the motor only. 3) If the motor output shaft type is Gear Type, □ contains the model type name of the gearbox being attached. 4) The phase & voltage code D contains a built-in thermal protector. 5) It is not possible to use an inverter for three phase 380~440V motor. When the inverter is used, the insulation of winding coil becomes hot and may cause damage to the motor.

Max. Permissible Torque at Output Shaft of Gearbox

60Hz

Motor Model	Gearbox Model	Gear Ratio	3	5	9	10	15	20	25	30	40	50	60	90	100	120	150	180
		r/min	600	360	200	180	120	90	72	60	45	36	30	20	18	12.5	12	10
10IDG*-300FU-T	10UBK□BH	kgfcm	45.0	75.0	135.0	140.0	205.0	250.0	300.0	300.0	350.0	350.0	400.0	400.0	400.0	400.0	400.0	400.0
		N.m	4.41	7.35	13.23	13.72	20.09	24.50	29.40	29.40	34.30	34.30	39.20	39.20	39.20	39.20	39.20	39.20

Motor Model	Gearbox Model	Gear Ratio	5	7.5	10	15	20	25	30	40
		r/min	360	240	180	120	90	72	60	45
10IDK*-300F-T	10WHD□-040	kgfcm	65.0	95.0	125.0	175.0	225.0	270.0	300.0	285.0
		N.m	6.37	9.31	12.25	17.15	22.05	26.46	29.40	27.93

Motor Model	Gearbox Model	Gear Ratio	15	20	25	30	40	50	60	80	100	120	160	200	225	240
		r/min	120	90	72	60	45	36	30	22.5	18	15	11.3	9	8	7.5
10IDG*-300FHC-T	10HC□-◇	kgfcm	200.0	266.6	333.3	399.9	533.3	666.6	799.9	1066.5	1333.2	1599.8	2133.1	2666.3	2999.6	3000.0
		N.m	19.60	26.13	32.66	39.19	52.26	65.32	78.39	104.52	130.65	156.78	209.04	261.30	293.96	294.00

50Hz

Motor Model	Gearbox Model	Gear Ratio	3	5	9	10	15	20	25	30	40	50	60	90	100	120	150	180
		r/min	500	300	167	150	100	75	60	50	37.5	30	25	16.7	15	12.5	10	8.3
10IDG*-300FU-T	10UBK□BH	kgfcm	55.0	95.0	170.0	170.0	250.0	300.0	300.0	300.0	350.0	350.0	400.0	400.0	400.0	400.0	400.0	400.0
		N.m	5.39	9.31	16.66	16.66	24.50	29.40	29.40	29.40	34.30	34.30	39.20	39.20	39.20	39.20	39.20	39.20

Motor Model	Gearbox Model	Gear Ratio	5	7.5	10	15	20	25	30	40
		r/min	360	240	180	120	90	72	60	45
10IDK*-300F-T	10WHD□-040	kgfcm	80.0	115.0	150.0	215.0	275.0	335.0	375.0	350.0
		N.m	7.84	11.27	14.70	21.07	26.95	32.83	36.75	34.30

Motor Model	Gearbox Model	Gear Ratio	15	20	25	30	40	50	60	80	100	120	160	200	225	240
		r/min	100	75	60	50	37.5	30	25	18.8	15	12.5	9.4	7.5	6.7	6.3
10IDG*-300FHC-T	10HC□-◇	kgfcm	246.1	328.2	410.2	492.2	656.3	820.4	984.5	1312.7	1640.8	1969.0	2625.3	3000.0	3000.0	3000.0
		N.m	24.12	32.16	40.20	48.24	64.32	80.40	96.48	128.64	160.80	192.96	257.28	294.00	294.00	294.00

1) Enter the phase & voltage code in the place * within the motor model name.
2) Enter the gear ratio in the place of □ within the gearbox model name.
3) A colored background indicates the gear shaft rotation in the same direction as the motor shaft
; a white background indicates the rotation in the opposite direction.
4) The rotating speed is calculated by dividing the motor's synchronous speed (50Hz: 1,500r/min, 60Hz: 1,800r/min) by the gear ratio.
The actual speed is 2~20% less than the displayed value, depending on the size of the load.

B AC Motors

Induction Motor 300W(□104mm)

Dimensions

MOTOR ONLY

● MOTOR MODEL:
10ID□□-300F-T

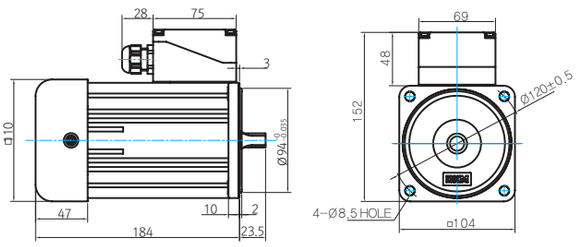

● MOTOR OUTPUT SHAFT

MODEL	SPEC
D-CUT TYPE	
10IDD□-300F	
KEY TYPE	
10IDK□-300F	

● KEY SPEC



GEARED MOTOR

U TYPE GEARBOX

● MOTOR MODEL:
10IDG□-300FU-T

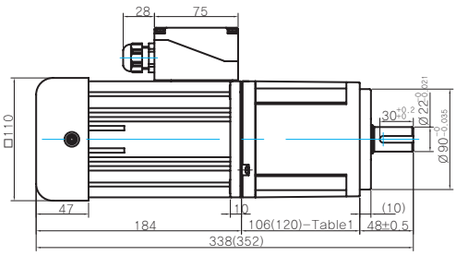

● GEARBOX MODEL:
10UBK□BH



● GEARBOX OUTPUT SHAFT

MODEL	SPEC
KEY TYPE	
10UBK□BH	

● KEY SPEC



● 106(120)-Table1

SIZE(mm)	GEAR RATIO
106	10UBK3BH – 10UBK60BH
120	10UBK90BH – 10UBK180BH

WH TYPE GEARBOX

● MOTOR MODEL:
10IDK□-300F-T

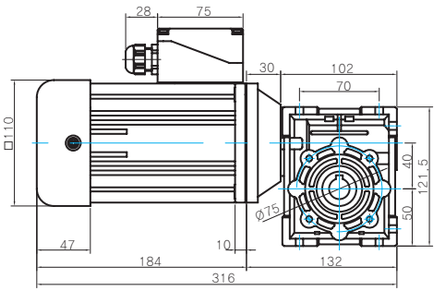

● GEARBOX MODEL:
10WHD□-040



● SHAFT



● FLANGE

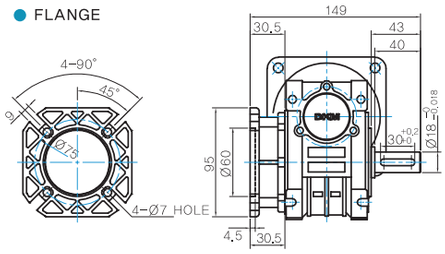

● KEY SPEC



HC TYPE GEARBOX

● GEARBOX MODEL : 10IDG□-300FHC-T (GENERAL FAN)

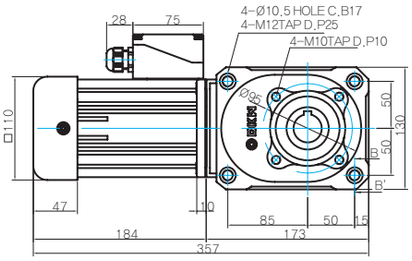

● GEARBOX MODEL : 10HC(15~60)□



● SHAFT

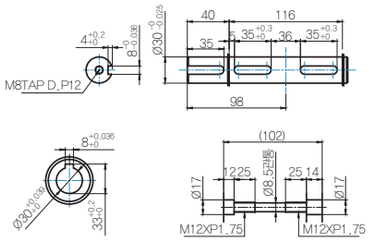

● KEY SPEC



● GEARBOX MODEL : 10IDG□-300FHC-T (GENERAL FAN)

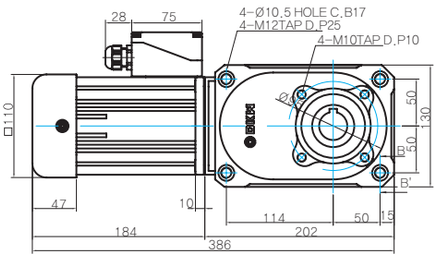

● GEARBOX MODEL : 10HC(80~240)□



WEIGHT

PART		WEIGHT(kg)
MOTOR		6.10
GEAR BOX	10UBK3BH - 10UBK9BH	2.00
	10UBK10BH - 10UBK15BH	2.15
	10UBK20BH - 10UBK60BH	2.30
	10UBK90BH - 10UBK180BH	2.50
	10WHD□-040	2.20
	10HC15-◇	5.50
	10HC20-◇ - 10HC60-◇	5.60
	10HC80-◇ - 10HC240-◇	6.40

*The output flange and shaft are sold separately.

Motor Images

10IDK□-300F-T	10IDG□-300FU-T+10UBK□BH	10IDK□-300F-T+10WHD□-040	10IDG□-300FHC-T+10HC□□

Connection Diagrams

Terminal Box Type

[Single Phase]

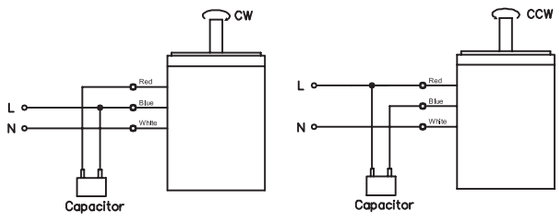

[Three Phase]

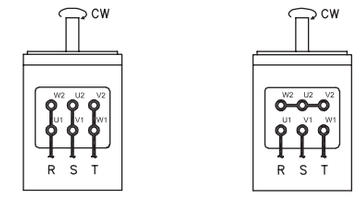

220V / 230V / 440V 380V / 400V

1) The direction of motor rotation is as viewed from the shaft end of the motor.
2) CW represents the clockwise direction, while CCW represents the counterclockwise direction.

Induction Motor 400W(□104mm)

400W Induction Motor 400W(□104mm)

Motor Specification

Model 10IDG6-400F□-T: Gear Type Shaft 10IDD6-400F-T: D-Cut Type Shaft 10IDK6-400F-T: Key Type Shaft Terminal Box Type	Output W	Voltage V	Frequency Hz	Poles	Duty	Starting Torque kgfcm	Starting Torque N.m	Rated Load Speed r/min	Rated Load Current A	Rated Load Torque kgfcm	Rated Load Torque N.m	Capacitor μF / VAC
10ID◇6-400F□-T	400	3Ø 220	60	4	Cont.	47.00	4.793	1600	2.10	24.35	2.435	–
		3Ø 380				47.00	4.793	1600	1.21	24.35	2.435	

1) Enter the output shaft type of motor in the place ◇ (G: Gear Type / D: D-Cut Type / K: Key Type). and D-Cut Type / Key Type Shaft are for using the motor only.
2) If the motor output shaft type is Gear Type, □ contains the model type name of the gearbox being attached.
3) It is not possible to use an inverter for three phase 380~440V motor. When the inverter is used, the insulation of winding coil becomes hot and may cause damage to the motor.

Max. Permissible Torque at Output Shaft of Gearbox

60Hz

Motor Output	Gearbox Model	Gear Ratio	3	5	9	10	15	20	25	30	40	50	60	90	100	120	150	180
		r/min	600	360	200	180	120	90	72	60	45	36	30	20	18	12.5	12	10
10IDG6-400FU-T	10UBK□BH	kgfcm	60.0	100.0	180.0	185.0	275.0	300.0	300.0	300.0	350.0	350.0	400.0	400.0	400.0	400.0	400.0	400.0
		N.m	5.88	9.80	17.64	18.13	26.95	29.40	29.40	29.40	34.30	34.30	39.20	39.20	39.20	39.20	39.20	39.20

Motor Model	Gearbox Model	Gear Ratio	5	7.5	10	15	20	25	30	40
		r/min	360	240	180	120	90	72	60	45
10IDK6-400F-T	10WHD□-040	kgfcm	85.0	125.0	160.0	230.0	295.0	355.0	395.0	375.0
		N.m	8.33	12.25	15.68	22.54	28.91	34.79	38.71	36.75

Motor Model	Gearbox Model	Gear Ratio	15	20	25	30	40	50	60	80	100	120	160	200	225	240
		r/min	120	90	72	60	45	36	30	22.5	18	15	11.3	9	8	7.5
10IDG6-400FHC-T	10HC□-◇	kgfcm	266.6	355.5	444.4	533.3	711.0	888.8	1066.5	1422.0	1777.6	2133.1	2844.1	3000.0	3000.0	3000.0
		N.m	26.13	34.84	43.55	52.26	69.68	87.10	104.52	139.36	174.20	209.04	278.72	294.00	294.00	294.00

1) Enter the gear ratio in the place of □ within the gearbox model name.
2) A colored background indicates the gear shaft rotation in the same direction as the motor shaft
; a white background indicates the rotation in the opposite direction.
3) The rotating speed is calculated by dividing the motor' s synchronous speed (50Hz: 1,500r/min, 60Hz: 1,800r/min) by the gear ratio.
The actual speed is 2~20% less than the displayed value, depending on the size of the load.

Dimensions

MOTOR ONLY

● MOTOR MODEL:
10ID□□-400F-T

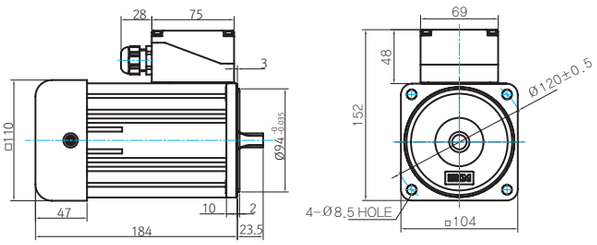

● MOTOR OUTPUT SHAFT

MODEL	SPEC
D-CUT TYPE	
10IDD□-400F	
KEY TYPE	
10IDK□-400F	

● KEY SPEC

MOTOR



GEARED MOTOR

U TYPE GEARBOX

● MOTOR MODEL:
10IDG□-400FU-T

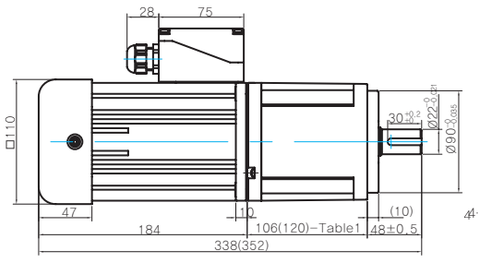

● GEARBOX MODEL:
10UBK□BH



● GEARBOX OUTPUT SHAFT

MODEL	SPEC
KEY TYPE	
10UBK□BH	

● KEY SPEC

GEARBOX



● 106(120)-Table1

SIZE(mm)	GEAR RATIO
106	10UBK3BH – 10UBK60BH
120	10UBK90BH – 10UBK180BH

WH TYPE GEARBOX

● MOTOR MODEL:
10IDK□-400F-T

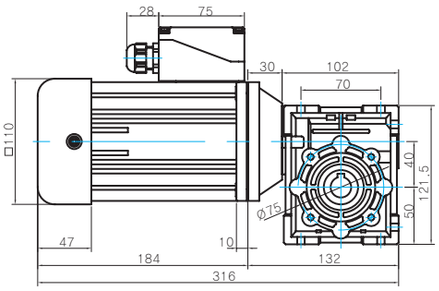

● GEARBOX MODEL:
10WHD□-040





● SHAFT(Unidirectional, Bi-directional)



● FLANGE

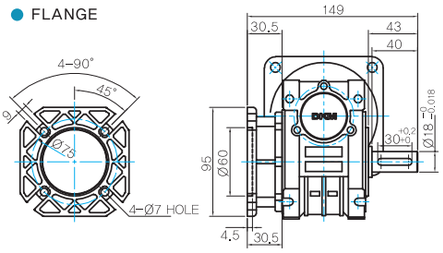

● KEY SPEC

GEARBOX



B AC Motors

Induction Motor 400W(□104mm)

HC TYPE GEARBOX

● GEARBOX MODEL : 10IDG6-400FHC-T (GENERAL FAN)

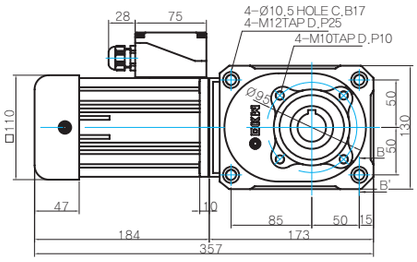

● GEARBOX MODEL : 10HC(15~60)□



● SHAFT

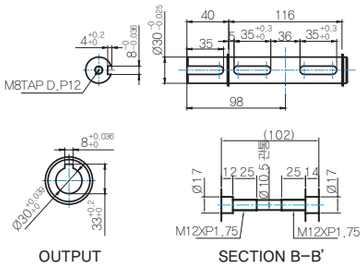

● GEARBOX MODEL : 10IDG6-400FHC-T (GENERAL FAN)

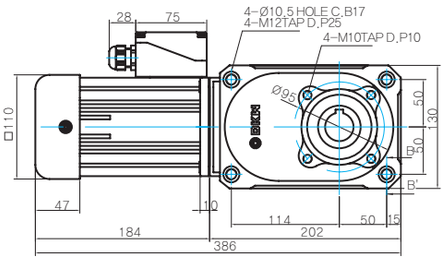

● GEARBOX MODEL : 10HC(80~240)□



● KEY SPEC



WEIGHT

PART		WEIGHT(kg)
MOTOR		6.10
GEAR BOX	10UBK3BH - 10UBK9BH	2.00
	10UBK10BH - 10UBK15BH	2.15
	10UBK20BH - 10UBK60BH	2.30
	10UBK90BH - 10UBK180BH	2.50
	10WHD□-040	2.20
	10HC15-◇	5.50
	10HC20-◇ - 10HC60-◇	5.60
	10HC80-◇ - 10HC240-◇	6.40

*The output flange and shaft are sold separately.

Motor Images

10IDK6-400 F-T	10IDG6-400 FU-T+10UBK□BH	10IDK6-400 F-T+10WHD□-040	10IDG6-400FHC-T+10HC□□

Connection Diagrams

Terminal Box Type

[Three Phase]



220V / 230V / 440V



380V / 400V

1) The direction of motor rotation is as viewed from the shaft end of the motor.
2) CW represents the clockwise direction, while CCW represents the counterclockwise direction.

2 Pole Motor

Index

2 Pole Motor 15W (□80mm)	B-59
2 Pole Motor 25W (□80mm)	B-61
2 Pole Motor 40W (□90mm)	B-63
2 Pole Motor 60W (□90mm)	B-65
2 Pole Motor 90W (□90mm)	B-67
2 Pole Motor 120W (□90mm)	B-69
2 Pole Motor 150W (□90mm)	B-71
2 Pole Motor 200W (□90mm)	B-73

B AC Motors

2 Pole Motor 15W(□80mm)

15W 2 Pole Motor 15W(□80mm)

Motor Specification

Model 8IDD*-15-A(T): D-Cut Type Shaft		Output	Voltage	Frequency	Poles	Duty	Starting Torque		Rated Load				Capacitor
Lead Wire Type	Terminal Box Type	W	V	Hz			kgfcm	N.m	Speed r/min	Current A	Torque kgfcm	Torque N.m	μF / VAC
8IDD1(A)-15-A	8IDD1(A)-15-AT	15	1ø 110	60	2	Cont.	0.75	0.075	3200	0.51	0.46	0.046	6.0 / 250
8IDDB-15-A	8IDDB-15-AT	15	1ø 100	50	2	Cont.	0.62	0.062	2700	0.39	0.54	0.054	6.0 / 250
				60			0.62	0.062	3300	0.41	0.44	0.044	
8IDDC-15-A	8IDDC-15-AT	15	1ø 200	50	2	Cont.	0.64	0.064	2700	0.20	0.54	0.054	1.5 / 450
				60			0.62	0.062	3300	0.20	0.44	0.044	
8IDD2(D)-15-A	8IDD2(D)-15-AT	15	1ø 220	60	2	Cont.	0.58	0.058	3200	0.23	0.46	0.046	1.2 / 450
8IDDE-15-A	8IDDE-15-AT	15	1ø 220	50	2	Cont.	0.58	0.058	2700	0.19	0.54	0.054	1.2 / 450
			1ø 240				0.73	0.073		0.22	0.54	0.054	
8IDD3(G)-15-A	8IDD3(G)-15-AT	15	3ø 220	50	2	Cont.	2.08	0.208	2800	0.13	0.52	0.052	–
				60			1.66	0.166	3300	0.13	0.44	0.044	
			3ø 230	50	2	Cont.	2.24	0.224	2800	0.14	0.52	0.052	–
				60			1.81	0.181	3300	0.14	0.44	0.044	
8IDDJ-15-A	8IDDJ-15-AT	15	3ø 200	50	2	Cont.	1.85	0.185	2700	0.14	0.54	0.054	–
				60			1.45	0.145	3300	0.12	0.44	0.044	
			3ø 220	50	2	Cont.	2.08	0.208	2800	0.13	0.52	0.052	–
				60			1.66	0.166	3300	0.13	0.44	0.044	

1) Enter the phase & voltage code in the place * within the motor model name.
2) The phase & voltage code A, B, C, D, E, G, J contain a built-in thermal protector.

Dimensions

LEAD WIRE TYPE

● MOTOR MODEL: 8IDD□□-15-A (NO FAN)

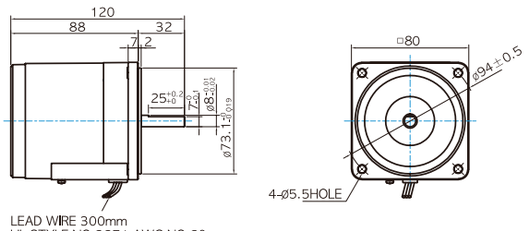

LEAD WIRE 300mm
UL STYLE NO.3271 AWG NO.20

● MOTOR OUTPUT SHAFT

MODEL	SPEC
D-CUT TYPE	
8IDD□-15-A	

TERMINAL BOX TYPE

● MOTOR MODEL: 8IDD□-15-AT (NO FAN)

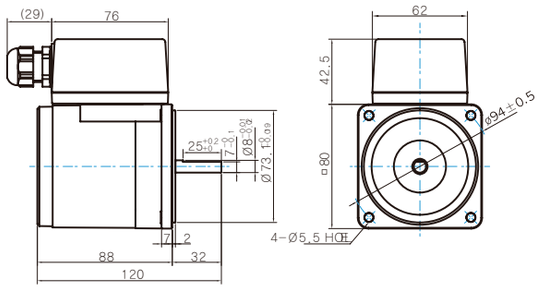

WEIGHT

PART	WEIGHT(kg)
MOTOR	1.56

Motor Images

8IDD□-15-A	8IDD□-15-AT

Connection Diagrams

Lead Wire Type

[Single Phase]





[Three Phase]



* **CCW Direction:**
Change any two connections among R, S and T.

INPUT \ LEAD WIRE	U	V	W
3Φ 200V~230V (3, G, J)	WHITE	RED	BLACK
3Φ 380V~400V (4, K)	WHITE	BLUE	BLACK
3Φ 415V~440V (5, L)	WHITE	YELLOW	BLACK

Terminal Box Type

[Single Phase]





[Three Phase]



* **CCW Direction:**
Change any two connections among R, S and T.

INPUT \ LEAD WIRE	U	V	W
3Φ 200V~230V (3, G, J)	WHITE	RED	BLACK
3Φ 380V~400V (4, K)	WHITE	BLUE	BLACK
3Φ 415V~440V (5, L)	WHITE	YELLOW	BLACK

1) The direction of motor rotation is as viewed from the shaft end of the motor.
2) CW represents the clockwise direction, while CCW represents the counterclockwise direction.
3) Change the direction of single phase motor rotation only after bringing the motor to a stop. If an attempt is made to change the direction of r otation while the motor is rotating, the motor may ignore the reversing command or change its direction after some delay.

B AC Motors

2 Pole Motor 25W(□80mm)

25W 2 Pole Motor 25W(□80mm)

Motor Specification

Model 8IDD*-25-A(T): D-Cut Type Shaft		Output	Voltage	Frequency	Poles	Duty	Starting Torque		Rated Load				Capacitor
Lead Wire Type	Terminal Box Type	W	V	Hz			kgfcm	N.m	Speed r/min	Current A	Torque kgfcm	Torque N.m	μF / VAC
8IDD1(A)-25-A	8IDD1(A)-25-AT	25	1ø 110	60	2	Cont.	0.75	0.075	3200	0.52	0.76	0.076	6.0 / 250
8IDDB-25-A	8IDDB-25-AT	25	1ø 100	50	2	Cont.	0.82	0.082	2600	0.51	0.94	0.094	8.0 / 250
				60			0.82	0.082	3200	0.57	0.76	0.076	
8IDDC-25-A	8IDDC-25-AT	25	1ø 200	50	2	Cont.	0.88	0.088	2600	0.26	0.94	0.094	2.0 / 450
				60			0.84	0.084	3200	0.29	0.76	0.076	
8IDD2(D)-25-A	8IDD2(D)-25-AT	25	1ø 220	60	2	Cont.	0.73	0.073	3200	0.26	0.76	0.076	1.5 / 450
8IDDE-25-A	8IDDE-25-AT	25	1ø 220	50	2	Cont.	0.73	0.073	2600	0.24	0.94	0.094	1.5 / 450
			1ø 240				0.91	0.091		0.26	0.94	0.094	
8IDD3(G)-25-A	8IDD3(G)-25-AT	25	3ø 220	50	2	Cont.	2.12	0.212	2700	0.15	0.90	0.090	–
				60			1.70	0.170	3200	0.15	0.76	0.076	
			3ø 230	50	2	Cont.	2.29	0.229	2700	0.16	0.90	0.090	–
				60			1.85	0.185	3200	0.16	0.76	0.076	
8IDDJ-25-A	8IDDJ-25-AT	25	3ø 200	50	2	Cont.	1.90	0.190	2600	0.16	0.94	0.094	–
				60			1.50	0.150	3100	0.16	0.79	0.079	
			3ø 220	50	2	Cont.	2.12	0.212	2700	0.15	0.90	0.090	–
				60			1.70	0.170	3200	0.15	0.76	0.076	

1) Enter the phase & voltage code in the place * within the motor model name.
2) The phase & voltage code A, B, C, D, E, G, J contain a built-in thermal protector.

Dimensions

LEAD WIRE TYPE

● MOTOR MODEL: 8ID□□-25-A (NO FAN)

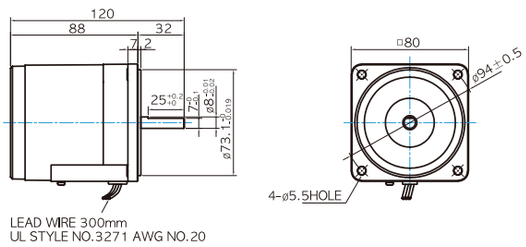

● MOTOR OUTPUT SHAFT

MODEL	SPEC
D-CUT TYPE	
8IDD□-25-A	

TERMINAL BOX TYPE

● MOTOR MODEL: 8IDD□-25-AT (NO FAN)

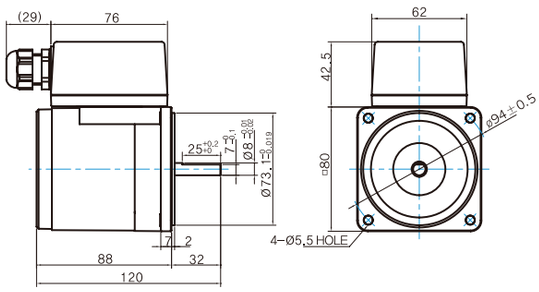

WEIGHT

PART	WEIGHT(kg)
MOTOR	1.56

Motor Images

8IDD□-25-A	8IDD□-25-AT

Connection Diagrams

Lead Wire Type

[Single Phase]

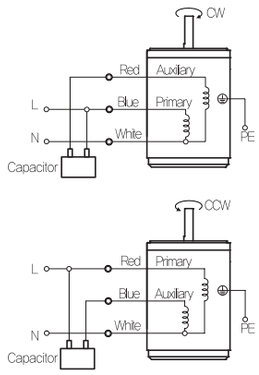

[Three Phase]



* **CCW Direction:**
Change any two connections among R, S and T.

INPUT \ LEAD WIRE	U	V	W
3Φ 200V~230V (3, G, J)	WHITE	RED	BLACK
3Φ 380V~400V (4, K)	WHITE	BLUE	BLACK
3Φ 415V~440V (5, L)	WHITE	YELLOW	BLACK

Terminal Box Type

[Single Phase]

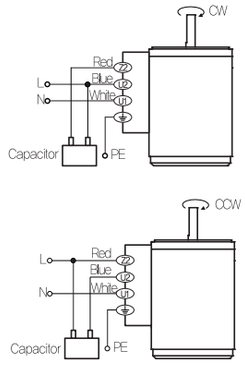

[Three Phase]



* **CCW Direction:**
Change any two connections among R, S and T.

INPUT \ LEAD WIRE	U	V	W
3Φ 200V~230V (3, G, J)	WHITE	RED	BLACK
3Φ 380V~400V (4, K)	WHITE	BLUE	BLACK
3Φ 415V~440V (5, L)	WHITE	YELLOW	BLACK

1) The direction of motor rotation is as viewed from the shaft end of the motor.
2) CW represents the clockwise direction, while CCW represents the counterclockwise direction.
3) Change the direction of single phase motor rotation only after bringing the motor to a stop. If an attempt is made to change the direction of rotation while the motor is rotating, the motor may ignore the reversing command or change its direction after some delay.

B AC Motors

2 Pole Motor 40W(□90mm)

40W 2 Pole Motor 40W(□90mm)

Motor Specification

Model 9IDD*-40-A(T): D-Cut Type Shaft 9IDK*-40-A(T): Key Type Shaft		Output	Voltage	Frequency	Poles	Duty	Starting Torque		Rated Load				Capacitor
Lead Wire Type	Terminal Box Type	W	V	Hz			kgfcm	N.m	Speed r/min	Current A	Torque kgfcm	Torque N.m	μF / VAC
9ID◇1(A)-40-A	9ID◇1(A)-40-AT	40	1ø 110	60	2	Cont.	1.65	0.165	3300	1.00	1.19	0.119	12.0 / 250
9ID◇B-40-A	9ID◇B-40-AT	40	1ø 100	50	2	Cont.	1.35	0.135	2700	1.00	1.44	0.144	12.0 / 250
				60			1.40	0.140	3200	1.10	1.22	0.122	
9ID◇C-40-A	9ID◇C-40-AT	40	1ø 200	50	2	Cont.	1.85	0.185	2700	0.46	1.44	0.144	4.0 / 450
				60			1.70	0.170	3200	0.57	1.22	0.122	
9ID◇2(D)-40-A	9ID◇2(D)-40-AT	40	1ø 220	60	2	Cont.	1.82	0.182	3200	0.63	1.22	0.122	4.0 / 450
9ID◇E-40-A	9ID◇E-40-AT	40	1ø 220	50	2	Cont.	1.75	0.175	2700	0.49	1.44	0.144	4.0 / 450
			1ø 240				2.05	0.205		0.52	1.44	0.144	
9ID◇3(G)-40-A	9ID◇3(G)-40-AT	40	3ø 220	50	2	Cont.	5.16	0.516	2700	0.28	1.44	0.144	–
				60			4.15	0.415	3200	0.28	1.22	0.122	
			3ø 230	50	2	Cont.	5.63	0.563	2700	0.30	1.44	0.144	
				60			4.48	0.448	3200	0.29	1.22	0.122	
9ID◇J-40-A	9ID◇J-40-AT	40	3ø 200	50	2	Cont.	4.65	0.465	2600	0.32	1.50	0.150	–
				60			3.70	0.370	3200	0.27	1.22	0.122	
			3ø 220	50	2	Cont.	5.16	0.516	2700	0.28	1.44	0.144	
				60			4.15	0.415	3200	0.28	1.22	0.122	
9ID◇4(K)-40-A	9ID◇4(K)-40-AT	40	3ø 380	50	2	Cont.	6.27	0.627	2700	0.18	1.44	0.144	–
				60			4.96	0.496	3200	0.19	1.22	0.122	
			3ø 400	50	2	Cont.	6.86	0.686	2700	0.20	1.44	0.144	
				60			5.41	0.541	3200	0.20	1.22	0.122	
9ID◇5(L)-40-A	9ID◇5(L)-40-AT	40	3ø 415	50	2	Cont.	6.12	0.612	2700	0.17	1.44	0.144	–
				60			4.95	0.495	3200	0.17	1.22	0.122	
			3ø 440	50	2	Cont.	6.80	0.680	2700	0.18	1.44	0.144	
				60			5.48	0.548	3200	0.18	1.22	0.122	

1) Enter the phase & voltage code in the place * within the motor model name.
2) Enter the output shaft type of motor in the place ◇ (D: D-Cut Type/K: Key Type).
3) The phase & voltage code A, B, C, D, E, G, J, K, L contain a built-in thermal protector.
4) It is not possible to use an inverter for three phase 380~440V motor. When the inverter is used, the insulation of winding coil becomes hot and may cause damage to the motor.

Dimensions

LEAD WIRE TYPE

● MOTOR MODEL: 9ID□□-40-A (NO FAN)

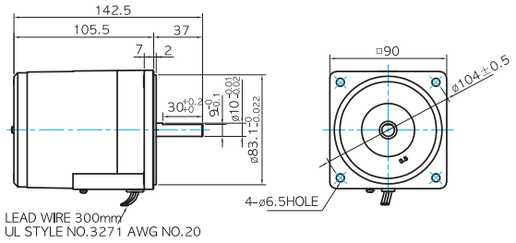

● MOTOR OUTPUT SHAFT



● KEY SPEC



TERMINAL BOX TYPE

● MOTOR MODEL: 9IDD□-40-AT (NO FAN)

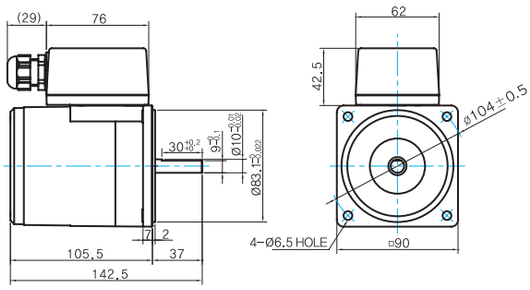

WEIGHT

PART	WEIGHT(kg)
MOTOR	2.45

Motor Images

9IDD□-40-A	9IDD□-40-AT

Connection Diagrams

Lead Wire Type

[Single Phase]





[Three Phase]



* **CCW Direction:** Change any two connections among R, S and T.

INPUT \ LEAD WIRE	U	V	W
3Φ 200V~230V (3, G, J)	WHITE	RED	BLACK
3Φ 380V~400V (4, K)	WHITE	BLUE	BLACK
3Φ 415V~440V (5, L)	WHITE	YELLOW	BLACK

Terminal Box Type

[Single Phase]





[Three Phase]



* **CCW Direction:** Change any two connections among R, S and T.

INPUT \ LEAD WIRE	U	V	W
3Φ 200V~230V (3, G, J)	WHITE	RED	BLACK
3Φ 380V~400V (4, K)	WHITE	BLUE	BLACK
3Φ 415V~440V (5, L)	WHITE	YELLOW	BLACK

1) The direction of motor rotation is as viewed from the shaft end of the motor.
2) CW represents the clockwise direction, while CCW represents the counterclockwise direction.
3) Change the direction of single phase motor rotation only after bringing the motor to a stop. If an attempt is made to change the direction of rotation while the motor is rotating, the motor may ignore the reversing command or change its direction after some delay.

B AC Motors

2 Pole Motor 60W(□90mm)

60W

2 Pole
Motor
60W(□90mm)

Motor Specification

Model 9IDD*-60F-A(T): D-Cut Type Shaft 9IDK*-60F-A(T): Key Type Shaft		Output	Voltage	Frequency	Poles	Duty	Starting Torque		Rated Load				Capacitor
Lead Wire Type	Terminal Box Type	W	V	Hz			kgfcm	N.m	Speed r/min	Current A	Torque kgfcm	Torque N.m	μF / VAC
9ID◇1(A)-60F-A	9ID◇1(A)-60F-AT	60	1ø 110	60	2	Cont.	2.15	0.215	3200	1.35	1.83	0.183	16.0 / 250
9ID◇B-60F-A	9ID◇B-60F-AT	60	1ø 100	50	2	Cont.	1.80	0.180	2700	1.10	2.16	0.216	16.0 / 250
				60			1.80	0.180	3200	1.25	1.83	0.183	
9ID◇C-60F-A	9ID◇C-60F-AT	60	1ø 200	50	2	Cont.	2.90	0.290	2700	0.83	2.16	0.216	6.0 / 450
				60			2.75	0.275	3200	0.83	1.83	0.183	
9ID◇2(D)-60F-A	9ID◇2(D)-60F-AT	60	1ø 220	60	2	Cont.	2.68	0.268	3200	0.86	1.83	0.183	5.0 / 450
9ID◇E-60F-A	9ID◇E-60F-AT	60	1ø 220	50	2	Cont.	2.49	0.249	2700	0.61	2.16	0.216	5.0 / 450
			1ø 240				3.06	0.306		0.68	2.16	0.216	
9ID◇3(G)-60F-A	9ID◇3(G)-60F-AT	60	3ø 220	50	2	Cont.	6.88	0.688	2700	0.35	2.16	0.216	–
				60			5.50	0.550	3200	0.33	1.83	0.183	
			3ø 230	50	2	Cont.	7.46	0.746	2700	0.36	2.16	0.216	
				60			5.96	0.596	3200	0.35	1.83	0.183	
9ID◇J-60F-A	9ID◇J-60F-AT	60	3ø 200	50	2	Cont.	6.05	0.605	2600	0.37	2.25	0.225	–
				60			4.80	0.480	3100	0.37	1.89	0.189	
			3ø 220	50	2	Cont.	6.88	0.688	2700	0.35	2.16	0.216	
				60			5.50	0.550	3200	0.33	1.83	0.183	
9ID◇4(K)-60F-A	9ID◇4(K)-60F-AT	60	3ø 380	50	2	Cont.	7.35	0.735	2700	0.22	2.16	0.216	–
				60			5.76	0.576	3200	0.21	1.83	0.183	
			3ø 400	50	2	Cont.	8.10	0.810	2700	0.23	2.16	0.216	
				60			6.39	0.639	3200	0.22	1.83	0.183	
9ID◇5(L)-60F-A	9ID◇5(L)-60F-AT	60	3ø 415	50	2	Cont.	7.80	0.780	2700	0.21	2.16	0.216	–
				60			6.20	0.620	3200	0.20	1.83	0.183	
			3ø 440	50	2	Cont.	8.66	0.866	2700	0.23	2.16	0.216	
				60			6.86	0.686	3200	0.21	1.83	0.183	

1) Enter the phase & voltage code in the place * within the motor model name.
2) Enter the output shaft type of motor in the place ◇ (D: D-Cut Type/K: Key Type).
3) The phase & voltage code A, B, C, D, E, G, J, K, L contain a built-in thermal protector.
4) It is not possible to use an inverter for three phase 380~440V motor. When the inverter is used, the insulation of winding coil becomes hot and may cause damage to the motor.

Dimensions

TERMINAL BOX TYPE

● MOTOR MODEL: 9ID□□-60F-AT (GENERAL FAN)

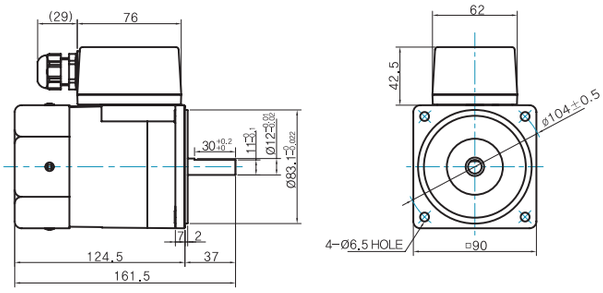

● MOTOR OUTPUT SHAFT

MODEL	SPEC
D-CUT TYPE	
9IDD□-60F-AT	

TERMINAL BOX TYPE

● MOTOR MODEL: 9IDD□-60F-AT (GENERAL FAN)

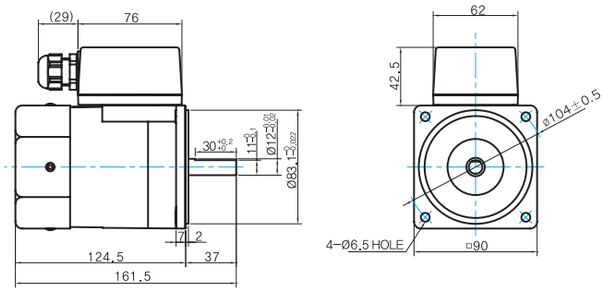

WEIGHT

PART	WEIGHT(kg)
MOTOR	2.65

Motor Images

9IDD□-60F-A	9IDD□-60F-AT

Connection Diagrams

Lead Wire Type

[Single Phase]





[Three Phase]



* **CCW Direction:** Change any two connections among R, S and T.

INPUT \ LEAD WIRE	U	V	W
3Φ 200V~230V (3, G, J)	WHITE	RED	BLACK
3Φ 380V~400V (4, K)	WHITE	BLUE	BLACK
3Φ 415V~440V (5, L)	WHITE	YELLOW	BLACK

Terminal Box Type

[Single Phase]





[Three Phase]



* **CCW Direction:** Change any two connections among R, S and T.

INPUT \ LEAD WIRE	U	V	W
3Φ 200V~230V (3, G, J)	WHITE	RED	BLACK
3Φ 380V~400V (4, K)	WHITE	BLUE	BLACK
3Φ 415V~440V (5, L)	WHITE	YELLOW	BLACK

1) The direction of motor rotation is as viewed from the shaft end of the motor.
2) CW represents the clockwise direction, while CCW represents the counterclockwise direction.
3) Change the direction of single phase motor rotation only after bringing the motor to a stop. If an attempt is made to change the direction of rotation while the motor is rotating, the motor may ignore the reversing command or change its direction after some delay.

B AC Motors

2 Pole Motor 90W(□90mm)

90W 2 Pole Motor 90W(□90mm)

Motor Specification

Model 9IDD*-90F-A(T): D-Cut Type Shaft 9IDK*-90F-A(T): Key Type Shaft		Output	Voltage	Frequency	Poles	Duty	Starting Torque		Rated Load				Capacitor
Lead Wire Type	Terminal Box Type	W	V	Hz			kgfcm	N.m	Speed r/min	Current A	Torque kgfcm	Torque N.m	μF / VAC
9ID◇1(A)-90F-A	9ID◇1(A)-90F-AT	90	1ø 110	60	2	Cont.	2.23	0.223	3200	1.98	2.74	0.274	20.0 / 250
9ID◇B-90F-A	9ID◇B-90F-AT	90	1ø 100	50	2	Cont.	2.70	0.270	2700	1.85	3.25	0.325	25.0 / 250
				60			2.50	0.250	3200	2.10	2.74	0.274	
9ID◇C-90F-A	9ID◇C-90F-AT	90	1ø 200	50	2	Cont.	2.80	0.280	2700	0.83	3.25	0.325	6.0 / 450
				60			2.40	0.240	3200	0.98	2.74	0.274	
9ID◇2(D)-90F-A	9ID◇2(D)-90F-AT	90	1ø 220	60	2	Cont.	2.74	0.274	3200	1.09	2.74	0.274	6.0 / 450
9ID◇E-90F-A	9ID◇E-90F-AT	90	1ø 220	50	2	Cont.	2.92	0.292	2700	0.82	3.25	0.325	6.0 / 450
			1ø 240				3.49	0.349		0.91	3.25	0.325	
9ID◇3(G)-90F-A	9ID◇3(G)-90F-AT	90	3ø 220	50	2	Cont.	11.00	1.100	2750	0.55	3.19	0.319	–
				60			8.00	0.800	3250	0.54	2.70	0.270	
			3ø 230	50	2	Cont.	12.00	1.200	2750	0.60	3.19	0.319	
				60			9.00	0.900	3250	0.56	2.70	0.270	
9ID◇J-90F-A	9ID◇J-90F-AT	90	3ø 200	50	2	Cont.	10.00	1.000	2700	0.55	3.25	0.325	–
				60			7.50	0.750	3200	0.55	2.74	0.274	
			3ø 220	50	2	Cont.	11.00	1.100	2750	0.55	3.19	0.319	
				60			8.00	0.800	3250	0.54	2.70	0.270	
9ID◇4(K)-90F-A	9ID◇4(K)-90F-AT	90	3ø 380	50	2	Cont.	10.44	1.044	2700	0.34	3.25	0.325	–
				60			8.06	0.806	3200	0.33	2.74	0.274	
			3ø 400	50	2	Cont.	11.41	1.141	2700	0.36	3.25	0.325	
				60			8.90	0.890	3200	0.34	2.74	0.274	
9ID◇5(L)-90F-A	9ID◇5(L)-90F-AT	90	3ø 415	50	2	Cont.	10.16	1.016	2700	0.34	3.25	0.325	–
				60			7.81	0.781	3200	0.32	2.74	0.274	
			3ø 440	50	2	Cont.	11.24	1.124	2700	0.36	3.25	0.325	
				60			8.66	0.866	3200	0.34	2.74	0.274	

1) Enter the phase & voltage code in the place * within the motor model name.
2) Enter the output shaft type of motor in the place ◇ (D: D-Cut Type/K: Key Type).
3) The phase & voltage code A, B, C, D, E, G, J, K, L contain a built-in thermal protector.
4) It is not possible to use an inverter for three phase 380~440V motor. When the inverter is used, the insulation of winding coil becomes hot and may cause damage to the motor.

Dimensions

LEAD WIRE TYPE

● MOTOR MODEL: 9ID□□-90F-A (GENERAL FAN)

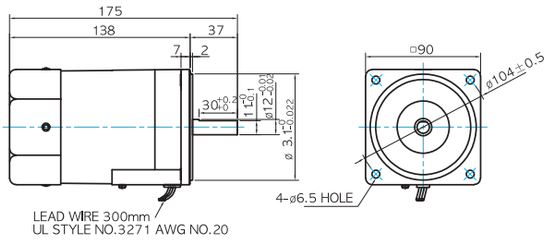

● MOTOR OUTPUT SHAFT

MODEL	SPEC
D-CUT TYPE	
9IDD□-90F-A	
KEY TYPE	
9IDK□-90F-A	

● KEY SPEC

GEARBOX



TERMINAL BOX TYPE

● MOTOR MODEL: 9IDD□-90F-AT (GENERAL FAN)

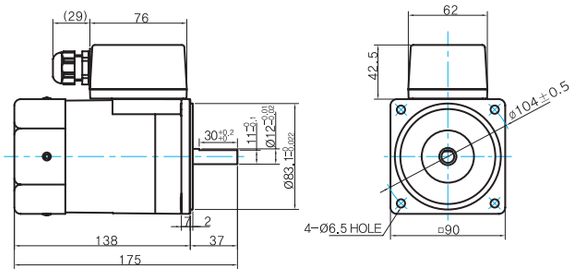

WEIGHT

PART	WEIGHT(kg)
MOTOR	3.05

Motor Images

9IDD□-90F-A	9IDD□-90F-AT

Connection Diagrams

Lead Wire Type

[Single Phase]





[Three Phase]



* **CCW Direction:** Change any two connections among R, S and T.

INPUT \ LEAD WIRE	U	V	W
3Φ 200V~230V (3, G, J)	WHITE	RED	BLACK
3Φ 380V~400V (4, K)	WHITE	BLUE	BLACK
3Φ 415V~440V (5, L)	WHITE	YELLOW	BLACK

Terminal Box Type

[Single Phase]





[Three Phase]



* **CCW Direction:** Change any two connections among R, S and T.

INPUT \ LEAD WIRE	U	V	W
3Φ 200V~230V (3, G, J)	WHITE	RED	BLACK
3Φ 380V~400V (4, K)	WHITE	BLUE	BLACK
3Φ 415V~440V (5, L)	WHITE	YELLOW	BLACK

1) The direction of motor rotation is as viewed from the shaft end of the motor.
2) CW represents the clockwise direction, while CCW represents the counterclockwise direction.
3) Change the direction of single phase motor rotation only after bringing the motor to a stop. If an attempt is made to change the direction of rotation while the motor is rotating, the motor may ignore the reversing command or change its direction after some delay.

B AC Motors

2 Pole Motor 120W(□90mm)

120W

2 Pole
Motor
120W(□90mm)

Motor Specification

Model 9IDD*-120F-A(T): D-Cut Type Shaft 9IDK*-120F-A(T): Key Type Shaft		Output	Voltage	Frequency	Poles	Duty	Starting Torque		Rated Load				Capacitor
Lead Wire Type	Terminal Box Type	W	V	Hz			kgfcm	N.m	Speed r/min	Current A	Torque kgfcm	Torque N.m	μF / VAC
9ID◇1(A)-120F-A	9ID◇1(A)-120F-AT	120	1ø 110	60	2	Cont.	3.00	0.300	3200	2.30	3.65	0.365	25.0 / 250
9ID◇2(D)-120F-A	9ID◇2(D)-120F-AT	120	1ø 220	60	2	Cont.	3.00	0.300	3200	1.15	3.65	0.365	6.5 / 450
9ID◇E-120F-A	9ID◇E-120F-AT	120	1ø 220	50	2	Cont.	3.20	0.320	2600	0.98	4.50	0.450	6.5 / 450
			1ø 240				3.80	0.380		1.08	4.50	0.450	
9ID◇3(G)-120F-A	9ID◇3(G)-120F-AT	120	3ø 220	50	2	Cont.	12.35	1.235	2700	0.65	4.33	0.433	–
				60			9.67	0.967	3200	0.63	3.65	0.365	
			3ø 230	50	2	Cont.	13.35	1.335	2700	0.69	4.33	0.433	
				60			10.49	1.049	3200	0.67	3.65	0.365	
9ID◇4(K)-120F-A	9ID◇4(K)-120F-AT	120	3ø 380	50	2	Cont.	12.40	1.240	2700	0.35	4.33	0.433	–
				60			9.58	0.958	3200	0.34	3.65	0.365	
			3ø 400	50	2	Cont.	13.55	1.355	2700	0.37	4.33	0.433	
				60			10.57	1.057	3200	0.35	3.65	0.365	
9ID◇5(L)-120F-A	9ID◇5(L)-120F-AT	120	3ø 415	50	2	Cont.	12.07	1.207	2700	0.35	4.33	0.433	–
				60			9.27	0.927	3200	0.33	3.60	0.360	
			3ø 440	50	2	Cont.	13.35	1.335	2700	0.37	4.25	0.425	
				60			10.29	1.029	3200	0.35	3.60	0.360	

1) Enter the phase & voltage code in the place * within the motor model name.
2) Enter the output shaft type of motor in the place ◇ (D: D-Cut Type/K: Key Type).
3) The phase & voltage code A, D, E, G, K, L contain a built-in thermal protector.
4) It is not possible to use an inverter for three phase 380~440V motor. When the inverter is used, the insulation of winding coil becomes hot and may cause damage to the motor.

Dimensions

LEAD WIRE TYPE

● MOTOR MODEL: 9ID□□-120F-A (GENERAL FAN)

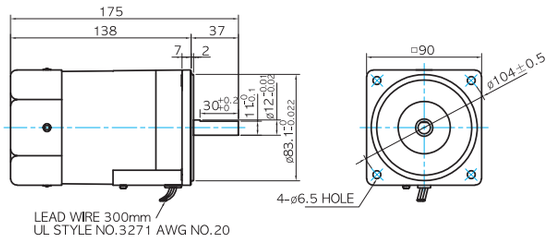

● MOTOR OUTPUT SHAFT

MODEL	SPEC
D-CUT TYPE	
9IDD□-120F-A	
KEY TYPE	
9IDK□-120F-A	

● KEY SPEC

GEARBOX



TERMINAL BOX TYPE

● MOTOR MODEL: 9IDD□-120F-AT (GENERAL FAN)

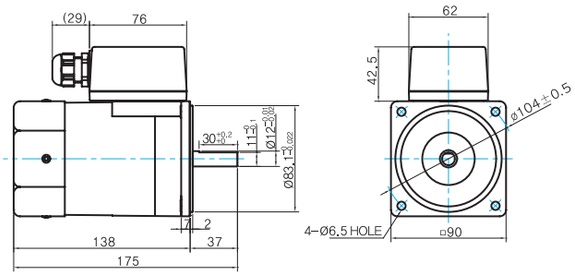

WEIGHT

PART	WEIGHT(kg)
MOTOR	3.05

Motor Images

9IDD□-120F-A	9IDD□-120F-AT

Connection Diagrams

Lead Wire Type

[Single Phase]

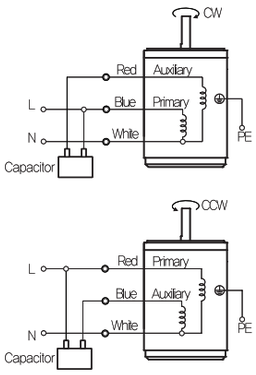

[Three Phase]



* **CCW Direction:** Change any two connections among R, S and T.

INPUT \ LEAD WIRE	U	V	W
3Φ 200V~230V (3, G, J)	WHITE	RED	BLACK
3Φ 380V~400V (4, K)	WHITE	BLUE	BLACK
3Φ 415V~440V (5, L)	WHITE	YELLOW	BLACK

Terminal Box Type

[Single Phase]

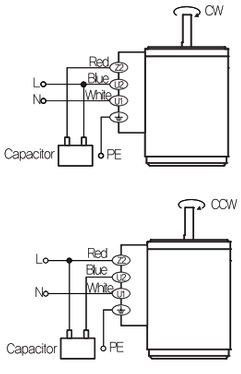

[Three Phase]



* **CCW Direction:** Change any two connections among R, S and T.

INPUT \ LEAD WIRE	U	V	W
3Φ 200V~230V (3, G, J)	WHITE	RED	BLACK
3Φ 380V~400V (4, K)	WHITE	BLUE	BLACK
3Φ 415V~440V (5, L)	WHITE	YELLOW	BLACK

1) The direction of motor rotation is as viewed from the shaft end of the motor.
2) CW represents the clockwise direction, while CCW represents the counterclockwise direction.
3) Change the direction of single phase motor rotation only after bringing the motor to a stop. If an attempt is made to change the direction of rotation while the motor is rotating, the motor may ignore the reversing command or change its direction after some delay.

B AC Motors

2 Pole Motor 150W(□90mm)

150W

2 Pole
Motor
150W(□90mm)

Motor Specification

Model 9IDD*-150F-A(T): D-Cut Type Shaft 9IDK*-150F-A(T): Key Type Shaft		Output	Voltage	Frequency	Poles	Duty	Starting Torque		Rated Load				Capacitor
Lead Wire Type	Terminal Box Type	W	V	Hz			kgfcm	N.m	Speed r/min	Current A	Torque kgfcm	Torque N.m	μF / VAC
9ID◇3(G)-150F-A	9ID◇3(G)-150F-AT	150	3ø 220	50	2	Cont.	13.91	1.391	2700	0.83	5.41	0.541	–
				60			11.08	1.108	3200	0.75	4.57	0.457	
			3ø 230	50	2	Cont.	14.97	1.497	2700	0.91	5.41	0.541	
				60			11.97	1.197	3200	0.80	4.57	0.457	
9ID◇4(K)-150F-A	9ID◇4(K)-150F-AT	150	3ø 380	50	2	Cont.	14.38	1.438	2700	0.44	5.41	0.541	–
				60			11.48	1.148	3200	0.41	4.57	0.457	
			3ø 400	50	2	Cont.	15.59	1.559	2700	0.49	5.41	0.541	
				60			12.56	1.256	3200	0.43	4.57	0.457	
9ID◇5(L)-150F-A	9ID◇5(L)-150F-AT	150	3ø 415	50	2	Cont.	14.02	1.402	2700	0.44	5.41	0.541	–
				60			11.27	1.127	3200	0.40	4.57	0.457	
			3ø 440	50	2	Cont.	15.52	1.552	2700	0.48	5.41	0.541	
				60			12.51	1.251	3200	0.44	4.57	0.457	

1) Enter the phase & voltage code in the place * within the motor model name.
2) Enter the output shaft type of motor in the place ◇ (D: D-Cut Type/K: Key Type).
3) The phase & voltage code G, K, L contain a built-in thermal protector.
4) It is not possible to use an inverter for three phase 380~440V motor. When the inverter is used, the insulation of winding coil becomes hot and may cause damage to the motor.

Dimensions

LEAD WIRE TYPE

● MOTOR MODEL: 9ID□□-150F-A (GENERAL FAN)

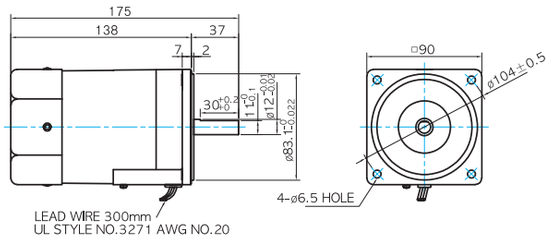

● MOTOR OUTPUT SHAFT

MODEL	SPEC
D-CUT TYPE	
9IDD□-150F-A	
KEY TYPE	
9IDK□-150F-A	

● KEY SPEC

GEARBOX



TERMINAL BOX TYPE

● MOTOR MODEL: 9IDD□-150F-AT (GENERAL FAN)

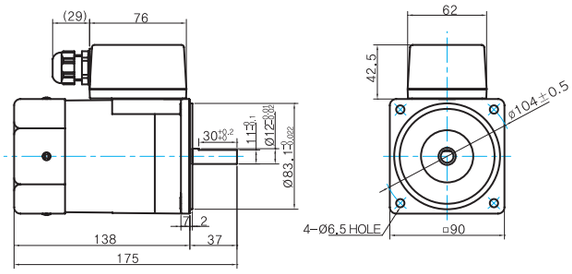

WEIGHT

PART	WEIGHT(kg)
MOTOR	3.05

Motor Images

9IDD□-150F-A	9IDD□-150F-AT

Connection Diagrams

Lead Wire Type



INPUT \ LEAD WIRE	U	V	W
3Φ 200V~230V (3, G, J)	WHITE	RED	BLACK
3Φ 380V~400V (4, K)	WHITE	BLUE	BLACK
3Φ 415V~440V (5, L)	WHITE	YELLOW	BLACK

* **CCW Direction:**
Change any two connections among R, S and T.

Terminal Box Type



INPUT \ LEAD WIRE	U	V	W
3Φ 200V~230V (3, G, J)	WHITE	RED	BLACK
3Φ 380V~400V (4, K)	WHITE	BLUE	BLACK
3Φ 415V~440V (5, L)	WHITE	YELLOW	BLACK

* **CCW Direction:**
Change any two connections among R, S and T.

1) The direction of motor rotation is as viewed from the shaft end of the motor.
2) CW represents the clockwise direction, while CCW represents the counterclockwise direction.

B AC Motors

2 Pole Motor 200W(□90mm)

200W

2 Pole
Motor
200W(□90mm)

Motor Specification

Model 9IDD*-200F-A(T): D-Cut Type Shaft 9IDK*-200F-A(T): Key Type Shaft		Output	Voltage	Frequency	Poles	Duty	Starting Torque		Rated Load				Capacitor
Lead Wire Type	Terminal Box Type	W	V	Hz			kgfcm	N.m	Speed r/min	Current A	Torque kgfcm	Torque N.m	μF / VAC
9ID◇3(G)-200F-A	9ID◇3(G)-200F-AT	200	3ø 220	50	2	Cont.	17.96	1.796	2600	1.09	7.49	0.749	–
				60			14.12	1.412	3200	0.89	6.09	0.609	
			3ø 230	50	2	Cont.	19.37	1.937	2600	1.10	7.49	0.749	
				60			15.30	1.530	3200	0.91	6.09	0.609	
9ID◇4(K)-200F-A	9ID◇4(K)-200F-AT	200	3ø 380	50	2	Cont.	17.57	1.757	2600	0.55	7.49	0.749	–
				60			13.91	1.391	3200	0.48	6.09	0.609	
			3ø 400	50	2	Cont.	19.15	1.915	2600	0.58	7.49	0.749	
				60			15.27	1.527	3200	0.49	6.09	0.609	
9ID◇5(L)-200F-A	9ID◇5(L)-200F-AT	200	3ø 415	50	2	Cont.	17.01	1.701	2600	0.55	7.49	0.749	–
				60			13.45	1.345	3200	0.45	6.09	0.609	
			3ø 440	50	2	Cont.	18.87	1.887	2600	0.57	7.49	0.749	
				60			14.87	1.487	3200	0.46	6.09	0.609	

1) Enter the phase & voltage code in the place * within the motor model name.
2) Enter the output shaft type of motor in the place ◇ (D: D-Cut Type/K: Key Type).
3) The phase & voltage code G, K, L contain a built-in thermal protector.
4) It is not possible to use an inverter for three phase 380~440V motor. When the inverter is used, the insulation of winding coil becomes hot and may cause damage to the motor.

Dimensions

LEAD WIRE TYPE

● MOTOR MODEL: 9ID□□-200F-A (GENERAL FAN)

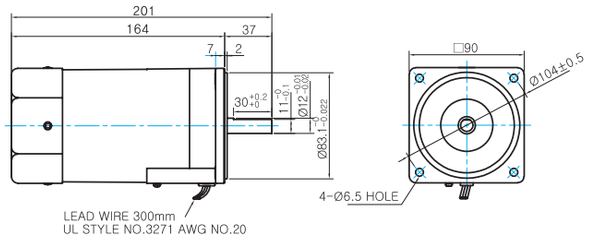

● MOTOR OUTPUT SHAFT

MODEL	SPEC
D-CUT TYPE	
9IDD□-200F-A	
KEY TYPE	
9IDK□-200F-A	

● KEY SPEC

GEARBOX



TERMINAL BOX TYPE

● MOTOR MODEL: 9IDD□-200F-AT (GENERAL FAN)

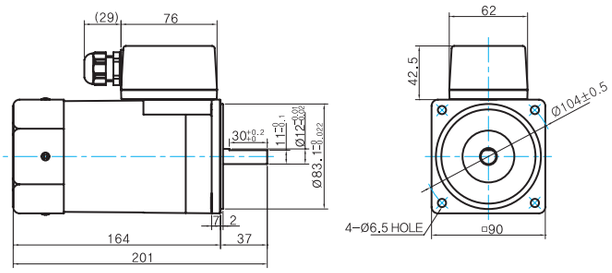

WEIGHT

PART	WEIGHT(kg)
MOTOR	3.80

Motor Images

9IDD□-200F-A	9IDD□-200F-AT

Connection Diagrams

Lead Wire Type



INPUT \ LEAD WIRE	U	V	W
3Φ 200V~230V (3, G, J)	WHITE	RED	BLACK
3Φ 380V~400V (4, K)	WHITE	BLUE	BLACK
3Φ 415V~440V (5, L)	WHITE	YELLOW	BLACK

* **CCW Direction:**
Change any two connections among R, S and T.

Terminal Box Type



INPUT \ LEAD WIRE	U	V	W
3Φ 200V~230V (3, G, J)	WHITE	RED	BLACK
3Φ 380V~400V (4, K)	WHITE	BLUE	BLACK
3Φ 415V~440V (5, L)	WHITE	YELLOW	BLACK

* **CCW Direction:**
Change any two connections among R, S and T.

1) The direction of motor rotation is as viewed from the shaft end of the motor.
2) CW represents the clockwise direction, while CCW represents the counterclockwise direction.

Reversible Motor

Index

Outline of Reversible Motor	B-77
Reversible Motor 6W (□60mm)	B-79
Reversible Motor 6W (□70mm)	B-81
Reversible Motor 10W (□70mm)	B-83
Reversible Motor 15W (□70mm)	B-85
Reversible Motor 15W (□80mm)	B-87
Reversible Motor 25W (□80mm)	B-90
Reversible Motor 40W (□90mm)	B-93
Reversible Motor 60W (□90mm)	B-96
Reversible Motor 90W (□90mm)	B-100
Reversible Motor 120W (□90mm)	B-104
Reversible Motor 180W (□90mm)	B-107

Outline of Reversible Motor

Suitable for Bi-directional Continuous Operation

- Reversible motors are designed for applications where frequent changes of direction is required. It is capacitor run type and single phase induction motor. So its basic features including speed, torque and voltage are same with induction motors. For the functions of frequent bi-directional operation within short time, the temporary brake is employed.

The Rating Time: 30 Minutes

- Reversible motors are designed for bi-directional operation within a short time so they can't avoid very high loss of input. So generally their temperature rising could be more severe than the induction motors. As a result, the rated operating time could be limited to 30 minutes. But please be informed that depending on the operating condition, they can be operated for more than 30 minutes if they are operated intermittently.

Brake Mechanism of the Reversible Motor

- A reversible motor employed a simple and built-in brake mechanism for the following purposes: (1) To improve the frequent and instant reversing function by applying a friction load (2) To reduce overrun

- The coil spring applies constant pressure so that the ceramic (brake block) slides toward the brake plate. This mechanism provides some degree of holding brake force, but there is limit in the force due to the mechanism's structure. The brake force is approximately 10% of the motor's output.

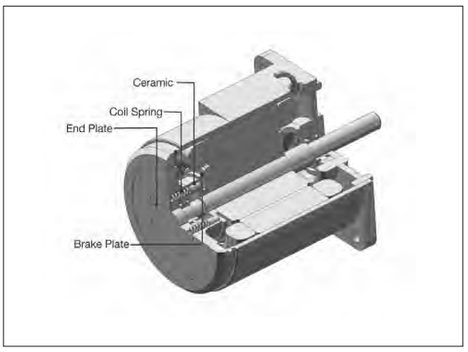

Speed-Torque Characteristics

- The reversible motor is a single phase induction motor of capacitor run type which has the same characteristics as an induction motor. The reversible motor has a higher starting torque than an induction motor in order to improve the instant reversing characteristics.

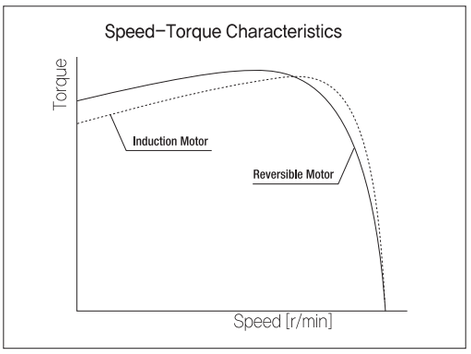

Operation Time and Temperature Rise

- The rating time of reversible motor is 30 minutes. But when the motor is operated intermittently for a short period of time, the operation time may vary depending on the operating conditions. The intermittent operation for a short period of time will cause a considerable flow of electric current in starting or reversing causing greater heat generation. But the motor's temperature rise can be controlled by keeping the motor at rest without using for a longer time by enhancing its natural cooling capability. Generally if the temperature of motor case remains below 90℃ constantly, the continuous operation is possible under unchanged condition considering insulation class of coil winding. The lower a temperature is, the longer the life time of bearing grease is.

Operating Cycle and Temperature Rise

(Figure 1) Operating Cycle

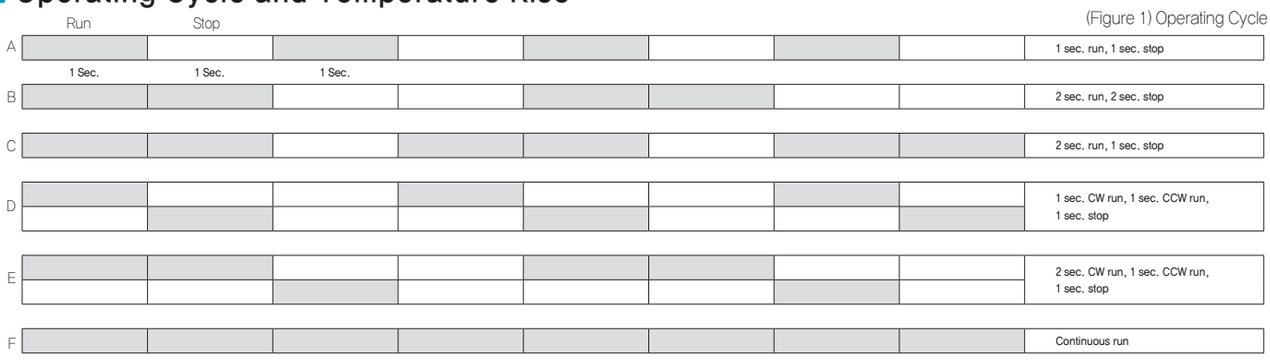

〈Figure2〉 7RDD□-6



〈Figure3〉 7RDD□-10



〈Figure4〉 8RDD□-15



〈Figure5〉 8RDD□-25



〈Figure6〉 9RDD□-40



〈Figure7〉 9RDD□-60F



General Specifications

Item	Specification
Insulation Resistance	100MΩ or more when DC500V MEGA is applied between the windings and the frame after rated motor operation under normal ambient temperature and humidity.
Dielectric Strength	Sufficient to withstand 1.5KV at 50Hz and 60Hz applied between the windings and the frame for 1 minute after rated motor operation under normal ambient temperature and humidity.
Temperature Rise	Temperature rise of windings are 80℃ or less measured by the resistance change method after rated motor operation with connecting a gearbox or equivalent heat radiation plate.
Insulation Class	Class B [130℃]
Overheat Protection	Operating temperature (Built-in thermal protector type motor): Open 120℃±5℃, Close 90℃±5℃
Ambient Temperature	-10℃~+40℃ (Three phase 220VAC: -10℃~+50℃)
Ambient Humidity	85% maximum

Connection Diagrams

Lead Wire Type



Terminal Box Type





Code	Contact Capacity
SW	AC125V 5A min. or AC250V 5A min. (Inductive load)
Ro, Co	Ro=5~200Ω Co=0.1~0.2μF, 200WV (400WV)

* Connect a CR circuit for surge suppression to protect the contact.

B AC Motors

Reversible Motor 6W(□60mm)

6W Reversible Motor 6W(□60mm)

Motor Specification

Model 6RDG*-6G(-T): Gear Type Shaft 6RDD*-6(-T): D-Cut Type Shaft		Output	Voltage	Frequency	Poles	Duty	Starting Torque		Rated Load				Capacitor
Lead Wire Type	Terminal Box Type	W	V	Hz			kgfcm	N.m	Speed r/min	Current A	Torque kgfcm	Torque N.m	μF / VAC
6RD◇1(A)-6□	6RD◇1(A)-6□-T	6	1ø 110	60	4	30min.	0.60	0.060	1550	0.25	0.38	0.038	3.0 / 250
6RD◇B-6□	6RD◇B-6□-T	6	1ø 100	50	4	30min.	0.64	0.064	1250	0.23	0.47	0.047	3.5 / 250
				60			0.61	0.061	1550	0.24	0.38	0.038	
6RD◇C-6□	6RD◇C-6□-T	6	1ø 200	50	4	30min.	0.65	0.065	1250	0.13	0.47	0.047	1.0 / 450
				60			0.61	0.061	1550	0.14	0.38	0.038	
6RD◇2(D)-6□	6RD◇2(D)-6□-T	6	1ø 220	60	4	30min.	0.62	0.062	1550	0.15	0.38	0.038	1.0 / 450
6RD◇E-6□	6RD◇E-6□-T	6	1ø 220	50	4	30min.	0.50	0.050	1200	0.10	0.49	0.049	0.7 / 450
			1ø 240				0.55	0.055		0.11	0.49	0.049	

1) Enter the phase & voltage code in the place * within the motor model name.
2) Enter the output shaft type of motor in the place ◇ (G: Gear Type / D: D-Cut Type). and D-Cut Type Shaft is for using the motor only.
3) If the motor output shaft type is Gear Type, □ contains the model type name of the gearbox being attached.
4) Impedance Protected Type

Max. Permissible Torque at Output Shaft of Gearbox

60Hz

Motor Model	Gearbox Model	Gear Ratio	3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120	150	180
		r/min	600	500	360	300	240	200	180	144	120	100	90	72	60	50	45	36	30	24	20	18	15	12	10
6RDG*-6G	6GBD□MH	kgfcm	0.9	1.1	1.5	1.8	2.3	2.7	3.1	3.8	4.6	5.5	5.5	6.9	8.3	9.9	11.0	12.4	14.9	18.7	22.4	24.9	30.0	30.0	30.0
		N.m	0.09	0.11	0.15	0.18	0.22	0.27	0.30	0.37	0.45	0.54	0.54	0.67	0.81	0.97	1.08	1.22	1.46	1.83	2.19	2.44	2.94	2.94	2.94

Motor Model	Gearbox Model	Gear Ratio	200	250
		r/min	9	7.2
6RDG*-6G	6GBD□MH	kgfcm	30.0	30.0
		N.m	2.94	2.94

50Hz

Motor Model	Gearbox Model	Gear Ratio	3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120	150	180
		r/min	500	417	300	250	200	166	150	120	100	83	75	60	50	41	37	30	25	20	16	15	12	10	8
6RDG*-6G	6GBD□MH	kgfcm	1.2	1.4	2.0	2.4	3.0	3.6	3.9	4.9	5.9	7.1	7.1	8.9	10.7	12.8	14.2	16.1	19.3	24.1	28.9	30.0	30.0	30.0	30.0
		N.m	0.12	0.14	0.19	0.23	0.29	0.35	0.39	0.48	0.58	0.70	0.70	0.87	1.05	1.25	1.39	1.57	1.89	2.36	2.83	2.94	2.94	2.94	2.94

Motor Model	Gearbox Model	Gear Ratio	200	250
		r/min	7.5	6
6RDG*-6G	6GBD□MH	kgfcm	30.0	30.0
		N.m	2.94	2.94

1) Enter the phase & voltage code in the place * within the motor model name.
2) Enter the gear ratio in the place of □ within the gearbox model name.
3) A colored background indicates the gear shaft rotation in the same direction as the motor shaft
; a white background indicates the rotation in the opposite direction.
4) The rotating speed is calculated by dividing the motor's synchronous speed (50Hz: 1,500r/min, 60Hz: 1,800r/min) by the gear ratio. The actual speed is 2~20% less than the displayed value, depending on the size of the load.

Motor Images

6RDD□-6	6RDD□-6-T	6RDG□-6G+6GBD□MH

Dimensions

MOTOR ONLY

● MOTOR MODEL: 6RD□□-6(-T) (NO FAN)

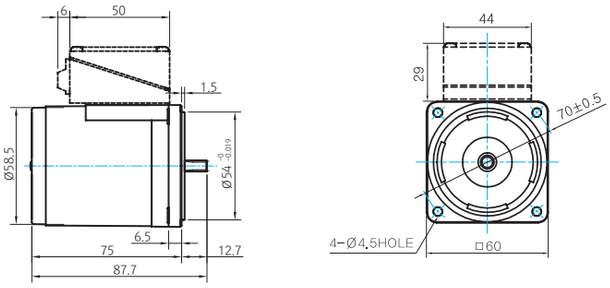

● MOTOR OUTPUT SHAFT

MODEL	SPEC
D-CUT TYPE	
6RDD□-6	

GEARED MOTOR

G TYPE GEARBOX

● MOTOR MODEL: 6RDG□-6G (NO FAN)

● GEARBOX MODEL: 6GBD□MH

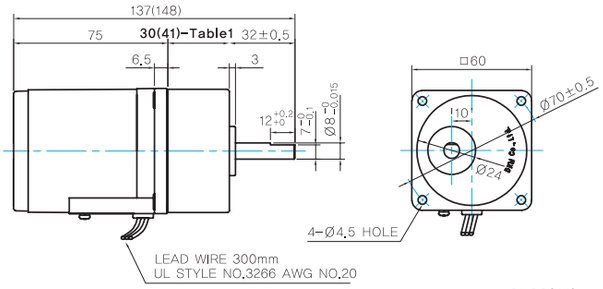

● GEARBOX OUTPUT SHAFT

MODEL	SPEC
KEY TYPE	
6GBD□MH	

● 30(41)-Table1

SIZE(mm)	GEAR RATIO
30	6GBD3MH – 6GBD18MH
41	6GBD20MH – 6GBD250MH

WEIGHT

PART		WEIGHT(kg)
MOTOR		0.70
GEAR BOX	6GBD3MH – 6GBD18MH	0.30
	6GBD20MH – 6GBD40MH	0.32
	6GBD50MH – 6GBD250MH	0.34

* The output flange and shaft are sold separately.

Connection Diagrams

Lead Wire Type	Terminal Box Type
	



Code	Contact Capacity
SW	AC125V 5A min. or AC250V 5A min. (Inductive load)
Ro, Co	Ro=5~200Ω Co=0.1~0.2μF, 200WV (400WV)

* Connect a CR circuit for surge suppression to protect the contact.

1) The direction of motor rotation is as viewed from the shaft end of the motor.
2) CW represents the clockwise direction, while CCW represents the counterclockwise direction.
3) During operation it is available to change the rotating direction by turning the switch to CW or CCW.

6W Reversible Motor 6W(□70mm)

Motor Specification

Model 7RDG*-6G(-T): Gear Type Shaft 7RDD*-6(-T): D-Cut Type Shaft		Output	Voltage	Frequency	Poles	Duty	Starting Torque		Rated Load				Capacitor
Lead Wire Type	Terminal Box Type	W	V	Hz			kgfcm	N.m	Speed r/min	Current A	Torque kgfcm	Torque N.m	μF / VAC
7RD◇1(A)-6□	7RD◇1(A)-6□-T	6	1ø 110	60	4	30min.	0.56	0.056	1600	0.27	0.37	0.037	3.0 / 250
7RD◇B-6□	7RD◇B-6□-T	6	1ø 100	50	4	30min.	0.66	0.066	1300	0.29	0.45	0.045	3.5 / 250
				60			0.63	0.063	1600	0.25	0.37	0.037	
7RD◇C-6□	7RD◇C-6□-T	6	1ø 200	50	4	30min.	0.67	0.067	1300	0.17	0.45	0.045	1.0 / 450
				60			0.64	0.064	1600	0.15	0.37	0.037	
7RD◇2(D)-6□	7RD◇2(D)-6□-T	6	1ø 220	60	4	30min.	0.75	0.075	1600	0.17	0.37	0.037	1.0 / 450
7RD◇E-6□	7RD◇E-6□-T	6	1ø 220	50	4	30min.	0.61	0.061	1250	0.15	0.47	0.047	0.8 / 450
			1ø 240				0.72	0.072		0.17	0.47	0.047	

1) Enter the phase & voltage code in the place * within the motor model name.
2) Enter the output shaft type of motor in the place ◇ (G: Gear Type / D: D-Cut Type). and D-Cut Type Shaft is for using the motor only.
3) If the motor output shaft type is Gear Type, □ contains the model type name of the gearbox being attached.
4) The phase & voltage code A, B, C, D, E contain a built-in thermal protector.

Max. Permissible Torque at Output Shaft of Gearbox

60Hz

Motor Model	Gearbox Model	Gear Ratio	3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120	150
		r/min	600	500	360	300	240	200	180	144	120	100	90	72	60	50	45	36	30	24	20	18	15	12
7RDG*-6G	7GBK□BMH	kgfcm	0.9	1.1	1.5	1.8	2.2	2.7	3.0	3.7	4.4	5.3	5.3	6.7	8.0	9.6	10.7	12.1	14.5	18.1	21.7	24.1	28.9	36.2
		N.m	0.09	0.10	0.14	0.17	0.22	0.26	0.29	0.36	0.43	0.52	0.52	0.65	0.78	0.94	1.05	1.18	1.42	1.77	2.13	2.36	2.83	3.54

Motor Model	Gearbox Model	Gear Ratio	180	200
		r/min	10	9
7RDG*-6G	7GBK□BMH	kgfcm	43.4	48.2
		N.m	4.25	4.72

50Hz

Motor Model	Gearbox Model	Gear Ratio	3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120	150
		r/min	500	417	300	250	200	167	150	120	100	83	75	60	50	42	38	30	25	20	17	15	12.5	10
7RDG*-6G	7GBK□BMH	kgfcm	1.1	1.3	1.8	2.2	2.7	3.3	3.6	4.6	5.5	6.6	6.6	8.2	9.8	11.8	13.1	14.8	17.8	22.3	26.7	29.7	35.6	44.5
		N.m	0.107	0.13	0.18	0.21	0.27	0.32	0.36	0.45	0.54	0.64	0.64	0.80	0.96	1.16	1.29	1.45	1.74	2.18	2.62	2.91	3.49	4.36

Motor Model	Gearbox Model	Gear Ratio	180	200
		r/min	8	7.5
7RDG*-6G	7GBK□BMH	kgfcm	50.0	50.0
		N.m	4.90	4.90

1) Enter the phase & voltage code in the place * within the motor model name.
2) Enter the gear ratio in the place of □ within the gearbox model name.
3) A colored background indicates the gear shaft rotation in the same direction as the motor shaft
: a white background indicates the rotation in the opposite direction.
4) The rotating speed is calculated by dividing the motor's synchronous speed (50Hz: 1,500r/min, 60Hz: 1,800r/min) by the gear ratio.
The actual speed is 2~20% less than the displayed value, depending on the size of the load.

Motor Images

7RDD□-6	7RDD□-6-T	7RDG□-6G+7GBK□BMH

Dimensions

MOTOR ONLY

● MOTOR MODEL: 7RD□□-6(-T) (NO FAN)

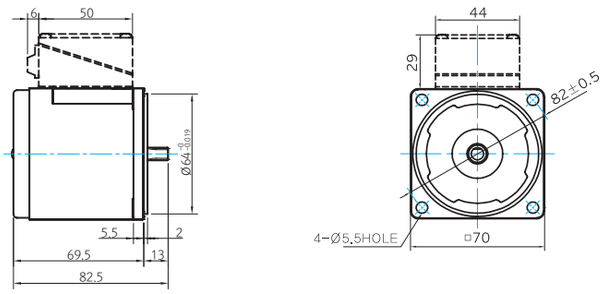

● MOTOR OUTPUT SHAFT

MODEL	SPEC
D-CUT TYPE	
7RDD□-6	

GEARED MOTOR

G TYPE GEARBOX

● MOTOR MODEL: 7RDG□-6G (NO FAN)

● GEARBOX MODEL: 7GBK□BMH

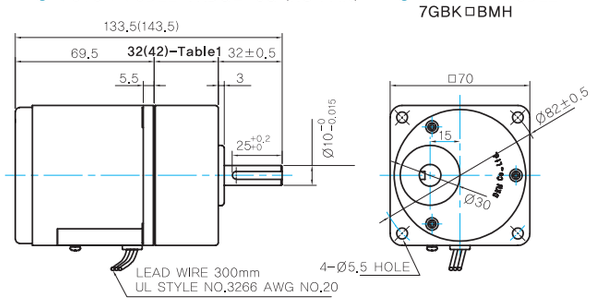

● GEARBOX OUTPUT SHAFT

MODEL	SPEC
KEY TYPE	
7GBK□BMH	

● KEY SPEC

GEARBOX


WEIGHT

PART		WEIGHT(kg)
MOTOR		0.83
GEAR BOX	7GBK3BMH - 7GBK18BMH	0.38
	7GBK20BMH - 7GBK40BMH	0.48
	7GBK50BMH - 7GBK200BMH	0.53

* The output flange and shaft are sold separately.

● 32(42)-Table1

SIZE(mm)	GEAR RATIO
32	7GBK3BMH - 7GBK18BMH
42	7GBK20BMH - 7GBK200BMH

Connection Diagrams

Lead Wire Type	Terminal Box Type
	



Code	Contact Capacity
SW	AC125V 5A min. or AC250V 5A min. (Inductive load)
Ro, Co	Ro=5~200Ω Co=0.1~0.2μF, 200WV (400WV)

* Connect a CR circuit for surge suppression to protect the contact.

1) The direction of motor rotation is as viewed from the shaft end of the motor.
2) CW represents the clockwise direction, while CCW represents the counterclockwise direction.
3) During operation it is available to change the rotating direction by turning the switch to CW or CCW.

B AC Motors

Reversible Motor 10W(□70mm)

10W Reversible Motor 10W(□70mm)

Motor Specification

Model 7RDG*-10G(-T): Gear Type Shaft 7RDD*-10(-T): D-Cut Type Shaft		Output	Voltage	Frequency	Poles	Duty	Starting Torque		Rated Load				Capacitor
Lead Wire Type	Terminal Box Type	W	V	Hz			kgfcm	N.m	Speed r/min	Current A	Torque kgfcm	Torque N.m	μF / VAC
7RD◇1(A)-10□	7RD◇1(A)-10□-T	10	1ø 110	60	4	30min.	0.70	0.070	1550	0.31	0.63	0.063	3.5 / 250
7RD◇B-10□	7RD◇B-10□-T	10	1ø 100	50	4	30min.	0.92	0.092	1200	0.34	0.81	0.081	5.0 / 250
				60			0.91	0.091	1550	0.34	0.63	0.063	
7RD◇C-10□	7RD◇C-10□-T	10	1ø 200	50	4	30min.	0.80	0.080	1250	0.18	0.78	0.078	1.2 / 450
				60			0.78	0.078	1550	0.18	0.63	0.063	
7RD◇2(D)-10□	7RD◇2(D)-10□-T	10	1ø 220	60	4	30min.	0.92	0.092	1550	0.20	0.63	0.063	1.2 / 450
7RD◇E-10□	7RD◇E-10□-T	10	1ø 220	50	4	30min.	0.78	0.078	1200	0.17	0.81	0.081	1.0 / 450
			1ø 240				0.94	0.094		0.18	0.81	0.081	

1) Enter the phase & voltage code in the place * within the motor model name.
2) Enter the output shaft type of motor in the place ◇ (G: Gear Type / D: D-Cut Type). and D-Cut Type Shaft is for using the motor only.
3) If the motor output shaft type is Gear Type, □ contains the model type name of the gearbox being attached.
4) The phase & voltage code A, B, C, D, E contain a built-in thermal protector.

Max. Permissible Torque at Output Shaft of Gearbox

60Hz

Motor Model	Gearbox Model	Gear Ratio	3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120	150
		r/min	600	500	360	300	240	200	180	144	120	100	90	72	60	50	45	36	30	24	20	18	15	12
7RDG*-10G	7GBK□ BMH	kgfcm	1.5	1.8	2.5	3.1	3.8	4.6	5.1	6.4	7.6	9.2	9.2	11.5	13.8	16.5	18.3	20.7	24.9	31.1	37.3	41.5	49.8	50.0
		N.m	0.15	0.18	0.25	0.30	0.37	0.45	0.50	0.62	0.75	0.90	0.90	1.12	1.35	1.62	1.80	2.03	2.44	3.05	3.66	4.06	4.88	4.90

Motor Model	Gearbox Model	Gear Ratio	180	200
		r/min	10	9
7RDG*-10G	7GBK□ BMH	kgfcm	50.0	50.0
		N.m	4.90	4.90

50Hz

Motor Model	Gearbox Model	Gear Ratio	3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120	150
		r/min	500	417	300	250	200	167	150	120	100	83	75	60	50	42	38	30	25	20	17	15	12.5	10
7RDG*-10G	7GBK□ BMH	kgfcm	2.0	2.4	3.3	3.9	4.9	5.9	6.6	8.2	9.9	11.8	11.9	14.8	17.8	21.3	23.7	26.8	32.1	40.2	48.2	50.0	50.0	50.0
		N.m	0.19	0.23	0.32	0.39	0.48	0.58	0.64	0.81	0.97	1.16	1.16	1.45	1.74	2.09	2.32	2.62	3.15	3.94	4.72	4.90	4.90	4.90

Motor Model	Gearbox Model	Gear Ratio	180	200
		r/min	8	7.5
7RDG*-10G	7GBK□ BMH	kgfcm	50.0	50.0
		N.m	4.90	4.90

1) Enter the phase & voltage code in the place * within the motor model name.
2) Enter the gear ratio in the place of □ within the gearbox model name.
3) A colored background indicates the gear shaft rotation in the same direction as the motor shaft
; a white background indicates the rotation in the opposite direction.
4) The rotating speed is calculated by dividing the motor's synchronous speed (50Hz: 1,500r/min, 60Hz: 1,800r/min) by the gear ratio. The actual speed is 2~20% less than the displayed value, depending on the size of the load.

Motor Images

7RDD□-10	7RDD□-10-T	7RDG□-10G+7GBK□BMH

Dimensions

MOTOR ONLY

● MOTOR MODEL: 7RD□□–10(–T) (NO FAN)

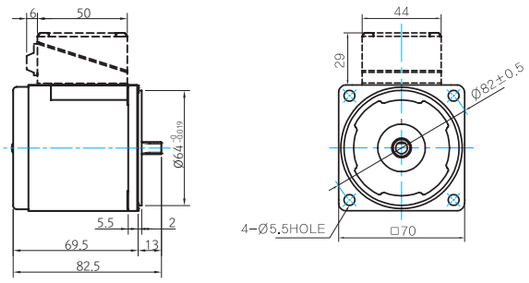

● MOTOR OUTPUT SHAFT

MODEL	SPEC
D-CUT TYPE	
7RDD□-10	

GEARED MOTOR

G TYPE GEARBOX

● MOTOR MODEL: 7RDG□–10G (NO FAN)

● GEARBOX MODEL: 7GBK□BMH

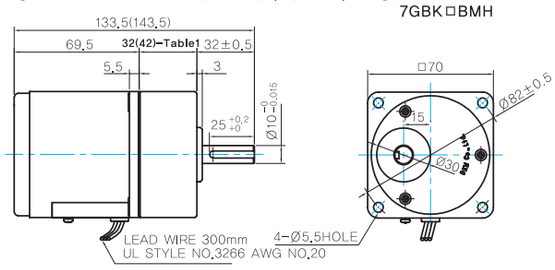

● GEARBOX OUTPUT SHAFT

MODEL	SPEC
KEY TYPE	
7GBK□BMH	

● KEY SPEC

GEARBOX


WEIGHT

PART		WEIGHT(kg)
MOTOR		0.83
GEAR BOX	7GBK3BMH – 7GBK18BMH	0.38
	7GBK20BMH – 7GBK40BMH	0.48
	7GBK50BMH – 7GBK200BMH	0.53

* The output flange and shaft are sold separately.

● 32(42)-Table1

SIZE(mm)	GEAR RATIO
32	7GBK3BMH – 7GBK18BMH
42	7GBK20BMH – 7GBK200BMH

Connection Diagrams

Lead Wire Type	Terminal Box Type
	



Code	Contact Capacity
SW	AC125V 5A min. or AC250V 5A min. (Inductive load)
Ro, Co	Ro=5~200Ω Co=0.1~0.2μF, 200WV (400WV)

* Connect a CR circuit for surge suppression to protect the contact.

1) The direction of motor rotation is as viewed from the shaft end of the motor.
2) CW represents the clockwise direction, while CCW represents the counterclockwise direction.
3) During operation it is available to change the rotating direction by turning the switch to CW or CCW.

15W Reversible Motor 15W(□70mm)

Motor Specification

Model 7RDG*-15G(-T): Gear Type Shaft 7RDD*-15(-T): D-Cut Type Shaft		Output	Voltage	Frequency	Poles	Duty	Starting Torque		Rated Load				Capacitor
							kgfcm	N.m	Speed	Current	Torque		
Lead Wire Type	Terminal Box Type	W	V	Hz					r/min	A	kgfcm	N.m	μF / VAC
7RD◇1(A)-15□	7RD◇1(A)-15□-T	15	1ø 110	60	4	30min.	1.35	0.135	1550	0.49	0.94	0.094	6.0 / 250
7RD◇B-15□	7RD◇B-15□-T	15	1ø 100	50	4	30min.	1.10	0.110	1250	0.40	1.17	0.117	6.0 / 250
				60			1.08	0.108	1550	0.44	0.94	0.094	
7RD◇C-15□	7RD◇C-15□-T	15	1ø 200	50	4	30min.	1.15	0.115	1250	0.21	1.17	0.117	1.5 / 450
				60			1.10	0.110	1550	0.22	0.94	0.094	
7RD◇2(D)-15□	7RD◇2(D)-15□-T	15	1ø 220	60	4	30min.	1.23	0.123	1600	0.22	0.91	0.091	1.5 / 450
7RD◇E-15□	7RD◇E-15□-T	15	1ø 220	50	4	30min.	1.07	0.107	1200	0.19	1.22	0.122	1.2 / 450
			1ø 240				1.28	0.128		0.21	1.22	0.122	

1) Enter the phase & voltage code in the place * within the motor model name.
2) Enter the output shaft type of motor in the place ◇ (G: Gear Type / D: D-Cut Type). and D-Cut Type Shaft is for using the motor only.
3) If the motor output shaft type is Gear Type, □ contains the model type name of the gearbox being attached.
4) The phase & voltage code A, B, C, D, E contain a built-in thermal protector.

Max. Permissible Torque at Output Shaft of Gearbox

60Hz

Motor Model	Gearbox Model	Gear Ratio	3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120	150
		r/min	600	500	360	300	240	200	180	144	120	100	90	72	60	50	45	36	30	24	20	18	15	12
7RDG*-15G	7GBK□ BMH	kgfcm	2.2	2.7	3.7	4.4	5.5	6.7	7.4	9.2	11.1	13.3	13.3	16.7	20.0	24.0	26.7	30.1	36.2	45.2	50.0	50.0	50.0	50.0
		N.m	0.22	0.26	0.36	0.43	0.54	0.65	0.72	0.91	1.09	1.30	1.31	1.63	1.96	2.35	2.61	2.95	3.54	4.43	4.90	4.90	4.90	4.90

Motor Model	Gearbox Model	Gear Ratio	180	200
		r/min	10	9
7RDG*-15G	7GBK□ BMH	kgfcm	50.0	50.0
		N.m	4.90	4.90

50Hz

Motor Model	Gearbox Model	Gear Ratio	3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120	150
		r/min	500	417	300	250	200	167	150	120	100	83	75	60	50	42	38	30	25	20	17	15	12.5	10
7RDG*-15G	7GBK□ BMH	kgfcm	3.0	3.6	4.9	5.9	7.4	8.9	9.9	12.3	14.8	17.8	17.8	22.2	26.7	32.0	35.6	40.2	48.2	50.0	50.0	50.0	50.0	50.0
		N.m	0.29	0.35	0.48	0.58	0.72	0.87	0.97	1.21	1.45	1.74	1.74	2.18	2.61	3.14	3.48	3.94	4.72	4.90	4.90	4.90	4.90	4.90

Motor Model	Gearbox Model	Gear Ratio	180	200
		r/min	8	7.5
7RDG*-15G	7GBK□ BMH	kgfcm	50.0	50.0
		N.m	4.90	4.90

1) Enter the phase & voltage code in the place * within the motor model name.
2) Enter the gear ratio in the place of □ within the gearbox model name.
3) A colored background indicates the gear shaft rotation in the same direction as the motor shaft
; a white background indicates the rotation in the opposite direction.
4) The rotating speed is calculated by dividing the motor's synchronous speed (50Hz: 1,500r/min, 60Hz: 1,800r/min) by the gear ratio. The actual speed is 2~20% less than the displayed value, depending on the size of the load.

Motor Images

7RDD□-15	7RDD□-15-T	7RDG□-15G+7GBK□BMH

Dimensions

MOTOR ONLY

- MOTOR MODEL: 7RD□□-15(-T) (NO FAN)

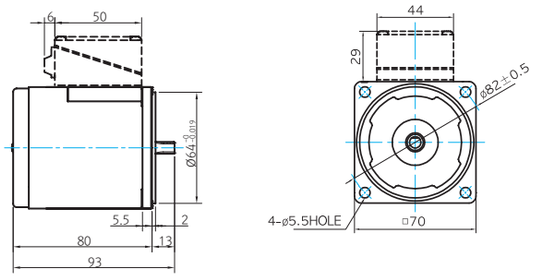

- MOTOR OUTPUT SHAFT

MODEL	SPEC
D-CUT TYPE	
7RDD□-10	

GEARED MOTOR

G TYPE GEARBOX

- MOTOR MODEL: 7RDG□-15G (NO FAN)
- GEARBOX MODEL: 7GBK□BMH

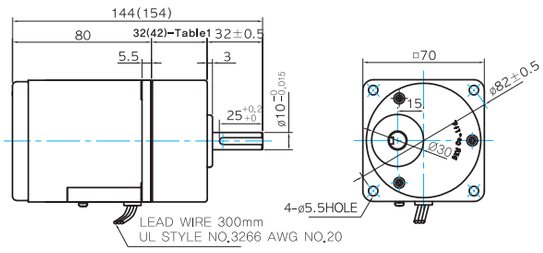

- GEARBOX OUTPUT SHAFT

MODEL	SPEC
KEY TYPE	
7GBK□BMH	

- KEY SPEC

GEARBOX


WEIGHT

PART		WEIGHT(kg)
MOTOR		1.10
GEAR BOX	7GBK3BMH - 7GBK18BMH	0.38
	7GBK20BMH - 7GBK40BMH	0.48
	7GBK50BMH - 7GBK200BMH	0.53

* The output flange and shaft are sold separately.

- 32(42)-Table1

SIZE(mm)	GEAR RATIO
32	7GBK3BMH - 7GBK18BMH
42	7GBK20BMH - 7GBK200BMH

Connection Diagrams

Lead Wire Type	Terminal Box Type
	



Code	Contact Capacity
SW	AC125V 5A min. or AC250V 5A min. (Inductive load)
Ro, Co	Ro=5~200Ω Co=0.1~0.2μF, 200WV (400WV)

* Connect a CR circuit for surge suppression to protect the contact.

1) The direction of motor rotation is as viewed from the shaft end of the motor.
2) CW represents the clockwise direction, while CCW represents the counterclockwise direction.
3) During operation it is available to change the rotating direction by turning the switch to CW or CCW.

15W Reversible Motor 15W(□80mm)

Motor Specification

Model 8RDG*-15□(-T): Gear Type Shaft 8RDD*-15(-T): D-Cut Type Shaft		Output	Voltage	Frequency	Poles	Duty	Starting Torque		Rated Load				Capacitor
Lead Wire Type	Terminal Box Type	W	V	Hz			kgfcm	N.m	Speed r/min	Current A	Torque kgfcm	Torque N.m	μF / VAC
8RD◇1(A)-15□	8RD◇1(A)-15□-T	15	1ø 110	60	4	30min.	1.58	0.158	1600	0.55	0.91	0.091	6.0 / 250
8RD◇B-15□	8RD◇B-15□-T	15	1ø 100	50	4	30min.	1.40	0.140	1350	0.52	1.08	0.108	6.0 / 250
				60			1.30	0.130	1600	0.50	0.91	0.091	
8RD◇C-15□	8RD◇C-15□-T	15	1ø 200	50	4	30min.	1.40	0.140	1350	0.22	1.08	0.108	1.5 / 450
				60			1.35	0.135	1600	0.22	0.91	0.091	
8RD◇2(D)-15□	8RD◇2(D)-15□-T	15	1ø 220	60	4	30min.	1.51	0.151	1600	0.24	0.91	0.091	1.5 / 450
8RD◇E-15□	8RD◇E-15□-T	15	1ø 220	50	4	30min.	1.49	0.149	1300	0.23	1.12	0.112	1.5 / 450
			1ø 240				1.77	0.177		0.25	1.12	0.112	

1) Enter the phase & voltage code in the place * within the motor model name.
2) Enter the output shaft type of motor in the place ◇ (G: Gear Type / D: D-Cut Type). and D-Cut Type Shaft is for using the motor only.
3) If the motor output shaft type is Gear Type, □ contains the model type name of the gearbox being attached.
4) The phase & voltage code A, B, C, D, E contain a built-in thermal protector.

Max. Permissible Torque at Output Shaft of Gearbox

60Hz

Motor Model	Gearbox Model	Gear Ratio	3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120	150	180
		r/min	600	500	360	300	240	200	180	144	120	100	90	72	60	50	45	36	30	24	20	18	15	12	10
8RDG*-15G	8GBK□BMH	kgfcm	2.2	2.7	3.7	4.4	5.5	6.7	7.4	9.2	11.1	13.3	13.3	16.7	20.0	24.0	26.7	30.1	36.2	45.2	54.2	60.3	72.3	80.0	80.0
		N.m	0.22	0.26	0.36	0.43	0.54	0.65	0.72	0.91	1.09	1.30	1.31	1.63	1.96	2.35	2.61	2.95	3.54	4.43	5.32	5.91	7.09	7.84	7.84

Motor Model	Gearbox Model	Gear Ratio	200	250	300	360
		r/min	9	7	6	5
8RDG*-15G	8GBK□BMH	kgfcm	80.0	80.0	80.0	80.0
		N.m	7.84	7.84	7.84	7.84

Motor Model	Gearbox Model	Gear Ratio	10	12	15	18	25	30	36	50	60
		r/min	180	150	120	100	72	60	50	36	30
8RDG*-15W	8WD□BL/□BR/□BRL	kgfcm	7.5	8.8	10.5	12.2	16.0	18.1	21.0	27.4	30.1
		N.m	0.73	0.86	1.03	1.19	1.57	1.77	2.06	2.68	2.95

50Hz

Motor Model	Gearbox Model	Gear Ratio	3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120	150	180
		r/min	500	417	300	250	200	167	150	120	100	83	75	60	50	42	37.5	30	25	20	17	15	12.5	10	8
8RDG*-15G	8GBK□BMH	kgfcm	2.6	3.2	4.4	5.3	6.6	7.9	8.8	11.0	13.1	15.8	15.8	19.8	23.7	28.4	31.6	35.7	42.9	53.6	64.3	71.4	80.0	80.0	80.0
		N.m	0.26	0.31	0.43	0.52	0.64	0.77	0.86	1.07	1.29	1.55	1.55	1.94	2.32	2.79	3.10	3.50	4.20	5.25	6.30	7.00	7.84	7.84	7.84

Motor Model	Gearbox Model	Gear Ratio	200	250	300	360
		r/min	7.5	6	5	4
8RDG*-15G	8GBK□BMH	kgfcm	80.0	80.0	80.0	80.0
		N.m	7.84	7.84	7.84	7.84

Motor Model	Gearbox Model	Gear Ratio	10	12	15	18	25	30	36	50	60
		r/min	150	125	100	83	60	50	42	30	25
8RDG*-15W	8WD□BL/□BR/□BRL	kgfcm	8.9	10.4	12.5	14.4	18.9	21.4	24.9	32.5	35.7
		N.m	0.87	1.02	1.22	1.41	1.86	2.10	2.44	3.18	3.50

1) Enter the phase & voltage code in the place * within the motor model name.
2) Enter the gear ratio in the place of □ within the gearbox model name.
3) A colored background indicates the gear shaft rotation in the same direction as the motor shaft
; a white background indicates the rotation in the opposite direction.
4) The rotating speed is calculated by dividing the motor's synchronous speed (50Hz: 1,500r/min, 60Hz: 1,800r/min) by the gear ratio.
The actual speed is 2~20% less than the displayed value, depending on the size of the load.

Dimensions

MOTOR ONLY

● MOTOR MODEL: 8RD□□–15(–T) (NO FAN)

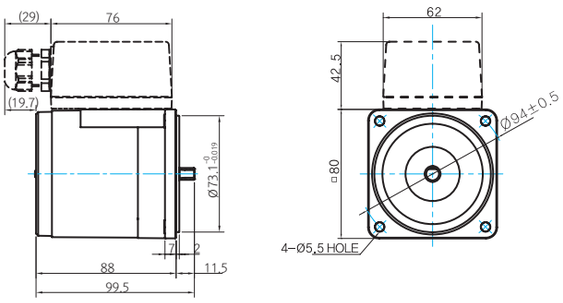

● MOTOR OUTPUT SHAFT

MODEL	SPEC
D-CUT TYPE	
8RDD□-15	

INTER-DECIMAL GEARBOX

● MODEL: 8XD10□□



GEARED MOTOR

G TYPE GEARBOX

● MOTOR MODEL: 8RDG□–15G (NO FAN)

● GEARBOX MODEL: 8GBK□BMH

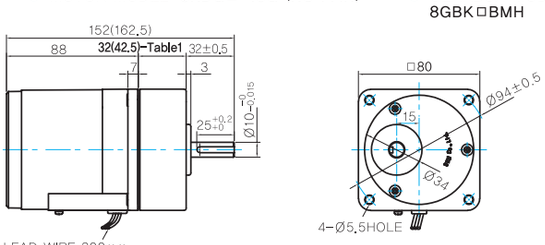

LEAD WIRE 300mm
UL STYLE NO.3271 AWG NO.20

● GEARBOX OUTPUT SHAFT

MODEL	SPEC
KEY TYPE	
8GBK□BMH	

● KEY SPEC



● 32(42.5)-Table1

SIZE(mm)	GEAR RATIO
32	8GBK3BMH – 8GBK18BMH
42.5	8GBK20BMH – 8GBK360BMH

W TYPE GEARBOX

● MOTOR MODEL: 8RDG□–15W (NO FAN)

● GEARBOX MODEL: 8WD□BL/BR/BRL

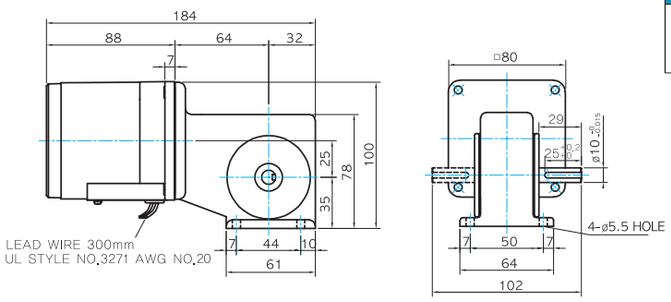

LEAD WIRE 300mm
UL STYLE NO.3271 AWG NO.20

● KEY SPEC



WEIGHT

PART		WEIGHT(kg)
MOTOR		1.56
GEAR BOX	8GBK3BMH – 8GBK18BMH	0.56
	8GBK20BMH – 8GBK40BMH	0.65
	8GBK50BMH – 8GBK360BMH	0.72
	8WD□BL/BR/BRL	0.68
	8XD10○○	0.45

* The output flange and shaft are sold separately.

Motor Images

8RDD□–15	8RDD□–15–T	8RDG□–15G+8GBK□BMH	8RDG□–15W+8WD□BL

B AC Motors

Reversible Motor 15W(□80mm)

Connection Diagrams

Lead Wire Type	Terminal Box Type
	



Code	Contact Capacity
SW	AC125V 5A min. or AC250V 5A min. (Inductive load)
Ro, Co	Ro=5~200Ω Co=0.1~0.2μF, 200WV (400WV)

* Connect a CR circuit for surge suppression to protect the contact.

1) The direction of motor rotation is as viewed from the shaft end of the motor.
2) CW represents the clockwise direction, while CCW represents the counterclockwise direction.
3) During operation it is available to change the rotating direction by turning the switch to CW or CCW.

25W Reversible Motor 25W(□ 80mm)

Motor Specification

Model 8RDG*-25□(-T): Gear Type Shaft 8RDD*-25(-T): D-Cut Type Shaft		Output	Voltage	Frequency	Poles	Duty	Starting Torque		Rated Load				Capacitor
Lead Wire Type	Terminal Box Type	W	V	Hz			kgfcm	N.m	Speed r/min	Current A	Torque kgfcm	Torque N.m	μF / VAC
8RD◇1(A)-25□	8RD◇1(A)-25□-T	25	1ø 110	60	4	30min.	2.40	0.240	1600	0.74	1.52	0.152	10.0 / 250
8RD◇B-25□	8RD◇B-25□-T	25	1ø 100	50	4	30min.	2.30	0.230	1300	0.62	1.87	0.187	10.0 / 250
				60			2.25	0.225	1600	0.68	1.52	0.152	
8RD◇C-25□	8RD◇C-25□-T	25	1ø 200	50	4	30min.	2.30	0.230	1300	0.29	1.87	0.187	2.5 / 450
				60			2.25	0.225	1600	0.33	1.52	0.152	
8RD◇2(D)-25□	8RD◇2(D)-25□-T	25	1ø 220	60	4	30min.	2.47	0.247	1600	0.35	1.52	0.152	2.5 / 450
8RD◇E-25□	8RD◇E-25□-T	25	1ø 220	50	4	30min.	1.97	0.197	1250	0.28	1.95	0.195	2.0 / 450
			1ø 240				2.49	0.249		0.31	1.95	0.195	

1) Enter the phase & voltage code in the place * within the motor model name.
2) Enter the output shaft type of motor in the place ◇ (G: Gear Type / D: D-Cut Type). and D-Cut Type Shaft is for using the motor only.
3) If the motor output shaft type is Gear Type, □ contains the model type name of the gearbox being attached.
4) The phase & voltage code A, B, C, D, E contain a built-in thermal protector.

Max. Permissible Torque at Output Shaft of Gearbox

60Hz

Motor Model	Gearbox Model	Gear Ratio	3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120
		r/min	600	500	360	300	240	200	180	144	120	100	90	72	60	50	45	36	30	24	20	18	15
8RDG*-25G	8GBK□ BMH	kgfcm	3.7	4.4	6.2	7.4	9.2	11.1	12.3	15.4	18.5	22.2	22.2	27.8	33.3	40.0	44.4	50.2	60.3	80.0	80.0	80.0	80.0
		N.m	0.36	0.43	0.60	0.72	0.91	1.09	1.21	1.51	1.81	2.17	2.18	2.72	3.27	3.92	4.35	4.92	5.91	7.84	7.84	7.84	7.84

Motor Model	Gearbox Model	Gear Ratio	150	180	200	250	300	360
		r/min	12	10	9	7	6	5
8RDG*-25G	8GBK□ BMH	kgfcm	80.0	80.0	80.0	80.0	80.0	80.0
		N.m	7.84	7.84	7.84	7.84	7.84	7.84

Motor Model	Gearbox Model	Gear Ratio	10	12	15	18	25	30	36	50	60
		r/min	180	150	120	100	72	60	50	36	30
8RDG*-25W	8WD□BL/□BR/□BRL	kgfcm	12.5	14.6	17.6	20.3	26.6	30.1	35.1	45.7	50.2
		N.m	1.22	1.43	1.72	1.99	2.61	2.95	3.44	4.47	4.92

50Hz

Motor Model	Gearbox Model	Gear Ratio	3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120
		r/min	500	417	300	250	200	167	150	120	100	83	75	60	50	42	37.5	30	25	20	17	15	12.5
8RDG*-25G	8GBK□ BMH	kgfcm	4.4	5.3	7.3	8.8	11.0	13.1	14.6	18.3	21.9	26.3	26.3	32.9	39.5	47.4	52.7	59.5	80.0	80.0	80.0	80.0	80.0
		N.m	0.43	0.52	0.72	0.86	1.07	1.29	1.43	1.79	2.15	2.58	2.58	3.23	3.87	4.65	5.16	5.83	7.84	7.84	7.84	7.84	7.84

Motor Model	Gearbox Model	Gear Ratio	150	180	200	250	300	360
		r/min	10	8	7.5	6	5	4
8RDG*-25G	8GBK□ BMH	kgfcm	80.0	80.0	80.0	80.0	80.0	80.0
		N.m	7.84	7.84	7.84	7.84	7.84	7.84

Motor Model	Gearbox Model	Gear Ratio	10	12	15	18	25	30	36	50	60
		r/min	150	125	100	83	60	50	42	30	25
8RDG*-25W	8WD□BL/□BR/□BRL	kgfcm	14.8	17.3	20.8	24.0	31.6	35.7	41.6	54.1	59.5
		N.m	1.45	1.70	2.04	2.35	3.09	3.50	4.07	5.30	5.83

1) Enter the phase & voltage code in the place * within the motor model name.
2) Enter the gear ratio in the place of □ within the gearbox model name.
3) A colored background indicates the gear shaft rotation in the same direction as the motor shaft
: a white background indicates the rotation in the opposite direction.
4) The rotating speed is calculated by dividing the motor's synchronous speed (50Hz: 1,500r/min, 60Hz: 1,800r/min) by the gear ratio.
The actual speed is 2~20% less than the displayed value, depending on the size of the load.

B AC Motors

Reversible Motor 25W(□80mm)

Dimensions

MOTOR ONLY

● MOTOR MODEL: 8RD□□-25(-T) (NO FAN)

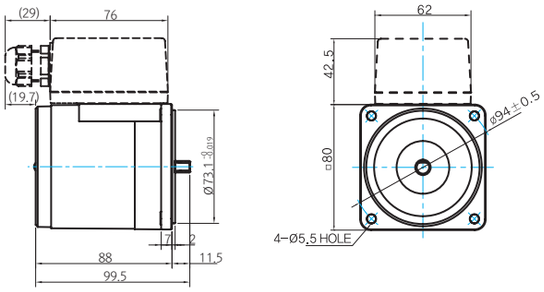

● MOTOR OUTPUT SHAFT

MODEL	SPEC
D-CUT TYPE	
8RDD□-15	

INTER-DECIMAL GEARBOX

● MODEL: 8XD10□□

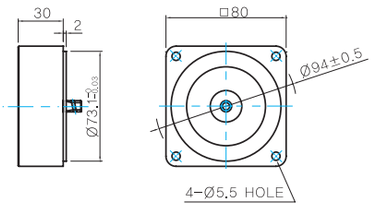

GEARED MOTOR

G TYPE GEARBOX

● MOTOR MODEL: 8RDG□-25G (NO FAN)



● GEARBOX MODEL: 8GBK□BMH



● GEARBOX OUTPUT SHAFT

MODEL	SPEC
KEY TYPE	
8GBK□BMH	

● KEY SPEC



● 30(40)-Table1

SIZE(mm)	GEAR RATIO
32	8GBK3BMH – 8GBK18BMH
42.5	8GBK20BMH – 8GBK360BMH

W TYPE GEARBOX

● MOTOR MODEL: 8RDG□-25W (NO FAN)

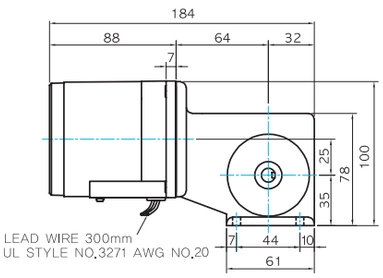

● GEARBOX MODEL: 8WD□BL/BR/BRL



● KEY SPEC



WEIGHT

PART		WEIGHT(kg)
MOTOR		1.56
GEAR BOX	8GBK3BMH – 8GBK18BMH	0.56
	8GBK20BMH – 8GBK40BMH	0.65
	8GBK50BMH – 8GBK360BMH	0.72
	8WD□BL/BR/BRL	0.68
	8XD10○○	0.45

*The output flange and shaft are sold separately.

Motor Images

8RDD□-25	8RDD□-25-T	8RDG□-25G+8GBK□BMH	8RDG□-25W+8WD□BL

Connection Diagrams

Lead Wire Type	Terminal Box Type
	



Code	Contact Capacity
SW	AC125V 5A min. or AC250V 5A min. (Inductive load)
Ro, Co	Ro=5~200Ω Co=0.1~0.2μF, 200WV (400WV)

* Connect a CR circuit for surge suppression to protect the contact.

1) The direction of motor rotation is as viewed from the shaft end of the motor.
2) CW represents the clockwise direction, while CCW represents the counterclockwise direction.
3) During operation it is available to change the rotating direction by turning the switch to CW or CCW.

40W Reversible Motor 40W(□90mm)

Motor Specification

Model 9RDG*-40□(-T): Gear Type Shaft 9RDD*-40(-T): D-Cut Type Shaft 9RDK*-40(-T): Key Type Shaft		Output W	Voltage V	Frequency Hz	Poles	Duty	Starting Torque kgfcm	Starting Torque N.m	Rated Load Speed r/min	Rated Load Current A	Rated Load Torque kgfcm	Rated Load Torque N.m	Capacitor μF / VAC
Lead Wire Type	Terminal Box Type												
9RD◇1(A)-40□	9RD◇1(A)-40□-T	40	1ø 110	60	4	30min.	4.00	0.400	1600	1.25	2.44	0.244	16.0 / 250
9RD◇B-40□	9RD◇B-40□-T	40	1ø 100	50	4	30min.	3.55	0.355	1300	0.95	3.00	0.300	16.0 / 250
				60			3.55	0.355	1600	1.15	2.44	0.244	
9RD◇C-40□	9RD◇C-40□-T	40	1ø 200	50	4	30min.	3.70	0.370	1300	0.51	3.00	0.300	4.0 / 450
				60			3.50	0.350	1600	0.53	2.44	0.244	
9RD◇2(D)-40□	9RD◇2(D)-40□-T	40	1ø 220	60	4	30min.	4.00	0.400	1600	0.61	2.44	0.244	4.0 / 450
9RD◇E-40□	9RD◇E-40□-T	40	1ø 220	50	4	30min.	3.20	0.320	1350	0.36	2.89	0.289	3.0 / 450
			1ø 240				3.91	0.391		0.39	2.89	0.289	

1) Enter the phase & voltage code in the place * within the motor model name. 2) Enter the output shaft type of motor in the place ◇ (G: Gear Type / D: D-Cut Type). and D-Cut Type Shaft is for using the motor only. 3) If the motor output shaft type is Gear Type, □ contains the model type name of the gearbox being attached.
4) The phase & voltage code A, B, C, D, E contain a built-in thermal protector.

Max. Permissible Torque at Output Shaft of Gearbox

60Hz

Motor Model	Gearbox Model	Gear Ratio	2	3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100
		r/min	900	600	500	360	300	240	200	180	144	120	100	90	72	60	50	45	36	30	24	20	18
9RDG*-40G	9GBK□BMH	kgfcm	3.9	5.9	7.1	9.9	11.8	14.8	17.8	19.7	24.7	29.6	35.5	35.6	44.4	53.3	64.0	71.1	80.4	96.4	100.0	100.0	100.0
		N.m	0.39	0.58	0.70	0.97	1.16	1.45	1.74	1.93	2.42	2.90	3.48	3.48	4.35	5.23	6.27	6.97	7.87	9.45	9.80	9.80	9.80

Motor Model	Gearbox Model	Gear Ratio	120	150	180	200
		r/min	15	12	10	9
9RDG*-40G	9GBK□BMH	kgfcm	100.0	100.0	100.0	100.0
		N.m	9.80	9.80	9.80	9.80

Motor Model	Gearbox Model	Gear Ratio	10	12	15	18	25	30	36	50	60
		r/min	180	150	120	100	72	60	50	36	30
9RDG*-40W	9WD□BL/□BR/□BRL	kgfcm	20.0	23.4	28.1	32.4	42.6	48.2	56.1	73.1	80.4
		N.m	1.96	2.29	2.76	3.18	4.18	4.72	5.50	7.16	7.87

Motor Model	Gearbox Model	Gear Ratio	2	3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75
		r/min	900	600	500	360	300	240	200	180	144	120	100	90	72	60	50	45	36	30	24
9RDG*-40P	9PBK□BH 9PFK□BH	kgfcm	3.9	5.9	7.1	9.9	11.8	14.8	17.8	19.7	22.2	26.7	32.0	35.6	40.2	48.2	57.9	64.3	80.4	96.4	107.7
		N.m	0.39	0.58	0.70	0.97	1.16	1.45	1.74	1.93	2.18	2.61	3.14	3.48	3.94	4.72	5.67	6.30	7.87	9.45	10.56

Motor Model	Gearbox Model	Gear Ratio	90	100	120	150	180	200
		r/min	20	18	15	12	10	9
9RDG*-40P	9PBK□BH 9PFK□BH	kgfcm	129.3	143.7	172.4	200.0	200.0	200.0
		N.m	12.67	14.08	16.90	19.60	19.60	19.60

50Hz

Motor Model	Gearbox Model	Gear Ratio	2	3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100
		r/min	750	500	417	300	250	200	167	150	120	100	83	75	60	50	42	38	30	25	20	17	15
9RDG*-40G	9GBK□BMH	kgfcm	4.7	7.0	8.4	11.7	14.0	17.5	21.0	23.4	29.2	35.1	42.1	42.1	52.7	63.2	75.8	84.3	95.2	100.0	100.0	100.0	100.0
		N.m	0.46	0.69	0.82	1.15	1.37	1.72	2.06	2.29	2.86	3.44	4.12	4.13	5.16	6.19	7.43	8.26	9.33	9.80	9.80	9.80	9.80

Motor Model	Gearbox Model	Gear Ratio	120	150	180	200
		r/min	13.0	10.0	8.0	7
9RDG*-40G	9GBK□BMH	kgfcm	100.0	100.0	100.0	100.0
		N.m	9.80	9.80	9.80	9.80

Motor Model	Gearbox Model	Gear Ratio	10	12	15	18	25	30	36	50	60
		r/min	150	125	100	83	60	50	42	30	25
9RDG*-40W	9WD□BL/□BR/□BRL	kgfcm	23.7	27.7	33.3	38.4	50.5	57.1	66.5	86.6	95.2
		N.m	2.32	2.72	3.27	3.77	4.95	5.60	6.52	8.48	9.33

Motor Model	Gearbox Model	Gear Ratio	2	3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75
		r/min	750	500	417	300	250	200	167	150	120	100	83	75	60	50	42	37.5	30	25	20
9RDG*-40P	9PBK□BH 9PFK□BH	kgfcm	4.7	7.0	8.4	11.7	14.0	17.5	21.0	23.4	26.3	31.6	37.9	42.1	47.6	57.1	68.6	76.2	95.2	114.3	127.7
		N.m	0.46	0.69	0.82	1.15	1.37	1.72	2.06	2.29	2.58	3.10	3.72	4.13	4.67	5.60	6.72	7.47	9.33	11.20	12.51

Motor Model	Gearbox Model	Gear Ratio	90	100	120	150	180	200
		r/min	17	15	12.5	10	8	7.5
9RDG*-40P	9PBK□BH 9PFK□BH	kgfcm	153.2	170.3	200.0	200.0	200.0	200.0
		N.m	15.02	16.69	19.60	19.60	19.60	19.60

1) Enter the phase & voltage code in the place * within the motor model name.
2) Enter the gear ratio in the place of □ within the gearbox model name.
3) A colored background indicates the gear shaft rotation in the same direction as the motor shaft ; a white background indicates the rotation in the opposite direction.
4) The rotating speed is calculated by dividing the motor's synchronous speed (50Hz: 1,500r/min, 60Hz: 1,800r/min) by the gear ratio. The actual speed is 2~20% less than the displayed value, depending on the size of the load.

Dimensions

MOTOR ONLY

● MOTOR MODEL: 9RD□□−40(−T) (NO FAN)

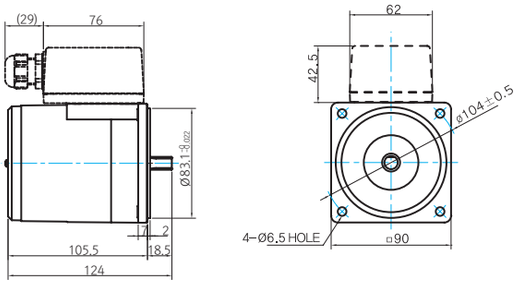

● MOTOR OUTPUT SHAFT

MODEL	SPEC
D−CUT TYPE	
9RDD□−40	
KEY TYPE	
9RDK□−40	

INTER-DECIMAL GEARBOX

● MODEL: 9XD10□□



GEARED MOTOR

G TYPE GEARBOX

● MOTOR MODEL: 9RDG□−40G (NO FAN)



● GEARBOX MODEL: 9GBK□BMH



● GEARBOX OUTPUT SHAFT

MODEL	SPEC
KEY TYPE	
9GBK□BMH	

● KEY SPEC



● 42(60)-Table1

SIZE(mm)	GEAR RATIO
42	9GBK2BMH − 9GBK18BMH
60	9GBK20BMH − 9GBK200BMH

P TYPE GEARBOX

● MOTOR MODEL: 9RDG□−40P (NO FAN)



● GEARBOX MODEL: 9PBK□BH



● GEARBOX MODEL: 9PFK□BH

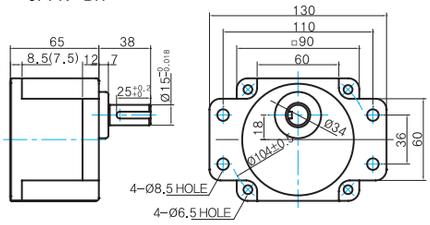

● KEY SPEC



● GEARBOX OUTPUT SHAFT

MODEL	SPEC
KEY TYPE	
9PBK□BH 9PFK□BH	

W TYPE GEARBOX

● MOTOR MODEL: 9RDG□−40W (NO FAN)

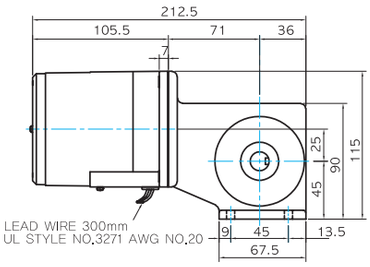

● GEARBOX MODEL: 9WD□BL/BR/BRL



● KEY SPEC



WEIGHT

PART		WEIGHT(kg)
MOTOR		2.45
GEAR BOX	9GBK2BMH − 9GBK18BMH	0.78
	9GBK20BMH − 9GBK40BMH	1.10
	9GBK50BMH − 9GBK200BMH	1.20
	9PB(F)K2BH − 9PB(F)K10BH	1.28
	9PB(F)K12.5BH − 9PB(F)K20BH	1.30
	9PB(F)K25BH − 9PB(F)K60BH	1.45
	9PB(F)K75BH − 9PB(F)K200BH	1.47
	9WD□BL/BR/BRL	1.00
	9XD10○○	0.60

*The output flange and shaft are sold separately.

B AC Motors

Reversible Motor 40W(□90mm)

Motor Images

9RDD□-40	9RDD□-40-T	9RDG□-40G+9GBK□BMH	9RDG□-40P+9PBK□BH

9RDG□-40W+9WD□BL

Connection Diagrams

Lead Wire Type	Terminal Box Type
	



Code	Contact Capacity
SW	AC125V 5A min. or AC250V 5A min. (Inductive load)
Ro, Co	Ro=5~200Ω Co=0.1~0.2μF, 200WV (400WV)

* Connect a CR circuit for surge suppression to protect the contact.

1) The direction of motor rotation is as viewed from the shaft end of the motor.
2) CW represents the clockwise direction, while CCW represents the counterclockwise direction.
3) During operation it is available to change the rotating direction by turning the switch to CW or CCW.

60W Reversible Motor 60W(□90mm)

Motor Specification

Model 9RDG*-60F□(-T): Gear Type Shaft 9RDD*-60F(-T): D-Cut Type Shaft 9RDK*-60F(-T): Key Type Shaft		Output	Voltage	Frequency	Poles	Duty	Starting Torque		Rated Load				Capacitor
									Speed	Current	Torque		
Lead Wire Type	Terminal Box Type	W	V	Hz			kgfcm	N.m	r/min	A	kgfcm	N.m	μF / VAC
9RD◇1(A)-60F□	9RD◇1(A)-60F□-T	60	1ø 110	60	4	30min.	5.20	0.520	1600	1.60	3.65	0.365	20.0 / 250
9RD◇B-60F□	9RD◇B-60F□-T	40	1ø 100	50	4	30min.	6.20	0.620	1300	1.60	4.50	0.450	25.0 / 250
				60			6.00	0.600	1600	1.70	3.65	0.365	
9RD◇C-60F□	9RD◇C-60F□-T	60	1ø 200	50	4	30min.	5.70	0.570	1300	0.76	4.50	0.450	6.0 / 450
				60			5.50	0.550	1600	0.79	3.65	0.365	
9RD◇2(D)-60F□	9RD◇2(D)-60F□-T	60	1ø 220	60	4	30min.	5.19	0.519	1600	0.75	3.65	0.365	5.0 / 450
9RD◇E-60F□	9RD◇E-60F□-T	60	1ø 220	50	4	30min.	5.52	0.552	1300	0.59	4.50	0.450	5.0 / 450
			1ø 240				6.52	0.652		0.64	4.50	0.450	

1) Enter the phase & voltage code in the place * within the motor model name.
2) Enter the output shaft type of motor in the place ◇ (G: Gear Type / D: D-Cut Type). and D-Cut Type Shaft is for using the motor only.
3) If the motor output shaft type is Gear Type, □ contains the model type name of the gearbox being attached.
4) The phase & voltage code A, B, C, D, E contain a built-in thermal protector.

Max. Permissible Torque at Output Shaft of Gearbox

60Hz

Motor Model	Gearbox Model	Gear Ratio	2	3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120	150	180	200
		r/min	900	600	500	360	300	240	200	180	144	120	100	90	72	60	50	45	36	30	24	20	18	15	12	10	9
9RDG*-60FP	9PBK□BH	kgfcm	5.9	8.9	10.7	14.8	17.8	22.2	26.6	29.6	33.3	40.0	48.0	53.3	60.3	72.3	86.8	96.4	120.5	144.6	161.6	193.9	200.0	200.0	200.0	200.0	200.0
	9PFK□BH	N.m	0.58	0.87	1.04	1.45	1.74	2.17	2.61	2.90	3.27	3.92	4.70	5.23	5.91	7.09	8.50	9.45	11.81	14.17	15.84	19.01	19.60	19.60	19.60	19.60	19.60
9RDG*-60FH	9HBK□BH	kgfcm	–	8.9	10.7	14.8	17.8	22.2	26.6	29.6	33.3	40.0	48.0	53.3	60.3	72.3	86.8	96.4	120.5	144.6	161.6	193.9	215.5	258.6	300.0	300.0	300.0
	9HFK□BH	N.m		0.87	1.04	1.45	1.74	2.17	2.61	2.90	3.27	3.92	4.70	5.23	5.91	7.09	8.50	9.45	11.81	14.17	15.84	19.01	21.12	25.34	29.40	29.40	29.40

Motor Model	Gearbox Model	Gear Ratio	10	12	15	18	25	30	36	50	60
		r/min	180	150	120	100	72	60	50	36	30
9RDG*-60FW	9WD□BL/□BR/□BRL	kgfcm	30.0	35.1	42.2	48.7	63.9	72.3	84.2	109.6	120.5
		N.m	2.94	3.44	4.13	4.77	6.26	7.09	8.25	10.74	11.81

Motor Model	Gearbox Model	Gear Ratio	5	7.5	10	15	20	25	30	40	50	60	80
		r/min	360	240	180	120	90	72	60	45	36	30	22
9RDG*-60FWH	9WHD□-030	kgfcm	12.7	18.4	23.7	33.3	42.1	48.2	56.1	69.0	78.9	87.7	102.9
		N.m	1.25	1.80	2.32	3.26	4.12	4.72	5.50	6.76	7.73	8.59	10.08

50Hz

Motor Model	Gearbox Model	Gear Ratio	2	3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120	150	180	200
		r/min	750	500	417	300	250	200	167	150	120	100	83	75	60	50	42	37.5	30	25	20	17	15	12.5	10	8	7.5
9RDG*-60FP	9PBK□BH	kgfcm	7.3	10.9	13.1	18.2	21.8	27.3	32.8	36.4	41.0	49.2	59.1	65.6	74.2	89.0	106.8	118.7	148.3	178.0	198.9	200.0	200.0	200.0	200.0	200.0	200.0
	9PFK□BH	N.m	0.71	1.07	1.28	1.78	2.14	2.68	3.21	3.57	4.02	4.82	5.79	6.43	7.27	8.72	10.47	11.63	14.54	17.45	19.49	19.60	19.60	19.60	19.60	19.60	19.60
9RDG*-60FH	9HBK□BH	kgfcm	–	10.9	13.1	18.2	21.8	27.3	32.8	36.4	41.0	49.2	59.1	65.6	74.2	89.0	106.8	118.7	148.3	178.0	198.9	238.7	265.2	300.0	300.0	300.0	300.0
	9HFK□BH	N.m		1.07	1.28	1.78	2.14	2.68	3.21	3.57	4.02	4.82	5.79	6.43	7.27	8.72	10.47	11.63	14.54	17.45	19.49	23.39	25.99	29.40	29.40	29.40	29.40

Motor Model	Gearbox Model	Gear Ratio	10	12	15	18	25	30	36	50	60
		r/min	150	125	100	83	60	50	42	30	25
9RDG*-60FW	9WD□BL/□BR/□BRL	kgfcm	36.9	43.2	51.9	59.9	78.7	89.0	103.6	134.9	122.4
		N.m	3.61	4.23	5.09	5.87	7.71	8.72	10.15	13.22	12.00

Motor Model	Gearbox Model	Gear Ratio	5	7.5	10	15	20	25	30	40	50	60	80
		r/min	300	200	150	100	75	60	50	38	30	25	18
9RDG*-60FWH	9WHD□-030	kgfcm	15.1	21.8	28.1	39.5	49.9	57.1	66.5	81.7	93.5	103.9	121.9
		N.m	1.48	2.14	2.75	3.87	4.89	5.60	6.52	8.01	9.16	10.18	11.95

1) Enter the phase & voltage code in the place * within the motor model name.
2) Enter the gear ratio in the place of □ within the gearbox model name.
3) A colored background indicates the gear shaft rotation in the same direction as the motor shaft
; a white background indicates the rotation in the opposite direction.
4) The rotating speed is calculated by dividing the motor's synchronous speed (50Hz: 1,500r/min, 60Hz: 1,800r/min) by the gear ratio.
The actual speed is 2~20% less than the displayed value, depending on the size of the load.

B AC Motors

Reversible Motor 60W(□90mm)

Dimensions

MOTOR ONLY

● MOTOR MODEL:
9RD□□-60F(-T) (GENERAL FAN)

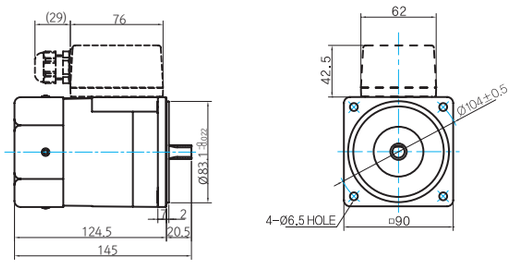

● MOTOR OUTPUT SHAFT

MODEL	SPEC
D-CUT TYPE	
9RDD□-60F	
KEY TYPE	
9RDK□-60F	



INTER-DECIMAL GEARBOX

● MODEL: 9XD10□□



GEARED MOTOR

P TYPE GEARBOX

● MOTOR MODEL:
9RDG□-60FP (GENERAL FAN)



● GEARBOX MODEL:
9PBK□BH



● GEARBOX MODEL:
9PFK□BH

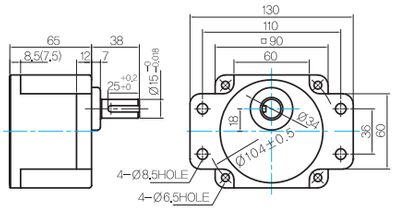

● GEARBOX OUTPUT SHAFT

MODEL	SPEC
KEY TYPE	
9PBK□BH 9PFK□BH	

● KEY SPEC

GEARBOX



H TYPE GEARBOX

● MOTOR MODEL:
9RDG□-60FH (GENERAL FAN)

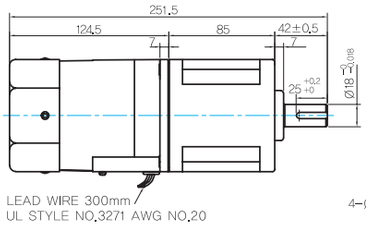

● GEARBOX MODEL:
9HBK□BH



● GEARBOX MODEL:
9HFK□BH

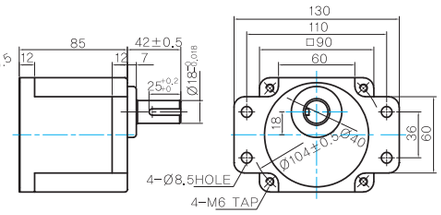

● GEARBOX OUTPUT SHAFT

MODEL	SPEC
KEY TYPE	
9HBK□BH 9HFK□BH	

● KEY SPEC

GEARBOX



W TYPE GEARBOX

● MOTOR MODEL:
9RDG□-60FW (GENERAL FAN)

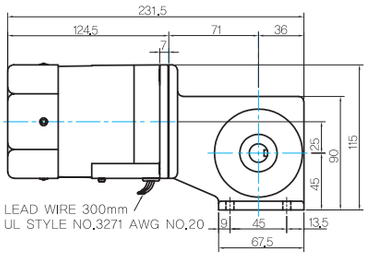

● GEARBOX MODEL:
9WD□BL/BR/BRL



● KEY SPEC

GEARBOX



WH TYPE GEARBOX

● MOTOR MODEL:
9RDG□-60FWH (GENERAL FAN)

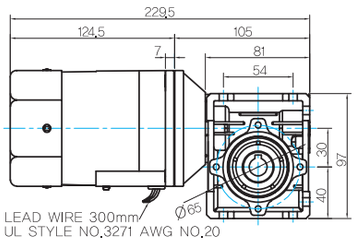

● GEARBOX MODEL:
9WHD□-030





● SHAFT



Unidirectional Bi-directional

● FLANGE

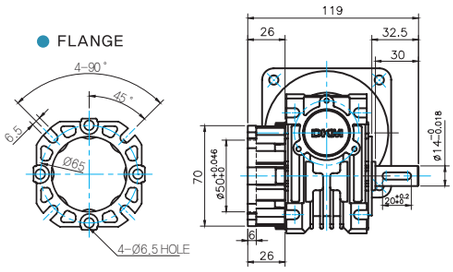

● KEY SPEC



WEIGHT

PART		WEIGHT(kg)
MOTOR		2.65
GEAR BOX	9PB(F)K2BH - 9PB(F)K10BH	1.28
	9PB(F)K12.5BH - 9PB(F)K20BH	1.30
	9PB(F)K25BH - 9PB(F)K60BH	1.45
	9PB(F)K75BH - 9PB(F)K200BH	1.47
	9HB(F)K3BH - 9HB(F)K10BH	1.62
	9HB(F)K12.5BH - 9HB(F)K20BH	1.68
	9HB(F)K25BH - 9HB(F)K60BH	1.73
	9HB(F)K75BH - 9HB(F)K200BH	1.78
	9WD□BL/BR/BRL	1.00
	9WHD□-030	1.20
	9XD10○○	0.60

*The output flange and shaft are sold separately.

Motor Images

9RDD□-60F	9RDD□-60F-T	9RDG□-60FP+9PBK□BH	9RDG□-60FP+9PFK□BH
9RDG□-60FH+9HBK□BH	**9RDG□-60FH+9HFK□BH**	**9RDG□-60FW+9WD□BL**	**9RDG□-60FWH+9WHD□**

B AC Motors

Reversible Motor 60W(□90mm)

Connection Diagrams

Lead Wire Type	Terminal Box Type
	



Code	Contact Capacity
SW	AC125V 5A min. or AC250V 5A min. (Inductive load)
Ro, Co	Ro=5~200Ω Co=0.1~0.2μF, 200WV (400WV)

* Connect a CR circuit for surge suppression to protect the contact.

1) The direction of motor rotation is as viewed from the shaft end of the motor.
2) CW represents the clockwise direction, while CCW represents the counterclockwise direction.
3) During operation it is available to change the rotating direction by turning the switch to CW or CCW.

90W Reversible Motor 90W(□ 90mm)

Motor Specification

Model (9RDG*-90F□(-T): Gear Type Shaft, 9RDD*-90F(-T): D-Cut Type Shaft, 9RDK*-90F(-T): Key Type Shaft)		Output	Voltage	Frequency	Poles	Duty	Starting Torque		Rated Load				Capacitor
Lead Wire Type	Terminal Box Type	W	V	Hz			kgfcm	N.m	Speed r/min	Current A	Torque kgfcm	Torque N.m	μF / VAC
9RD◇1(A)-90F□	9RD◇1(A)-90F□-T	90	1ø 110	60	4	30min.	6.49	0.649	1600	2.00	5.48	0.548	25.0 / 250
9RD◇B-90F□	9RD◇B-90F□-T	90	1ø 100	50	4	30min.	6.80	0.680	1300	1.95	6.74	0.674	30.0 / 250
				60			6.50	0.650	1600	2.10	5.48	0.548	
9RD◇C-90F□	9RD◇C-90F□-T	90	1ø 200	50	4	30min.	6.50	0.650	1300	1.15	6.74	0.674	7.0 / 450
				60			6.20	0.620	1600	1.00	5.48	0.548	
9RD◇2(D)-90F□	9RD◇2(D)-90F□-T	90	1ø 220	60	4	30min.	6.11	0.611	1600	1.04	5.48	0.548	6.0 / 450
9RD◇E-90F□	9RD◇E-90F□-T	90	1ø 220	50	4	30min.	6.07	0.607	1250	0.92	7.01	0.701	6.0 / 450
			1ø 240				7.15	0.715		1.00	7.01	0.701	

1) Enter the phase & voltage code in the place * within the motor model name.
2) Enter the output shaft type of motor in the place ◇ (G: Gear Type / D: D-Cut Type / K: Key Type). and D-Cut Type Shaft / Key Type Shaft are for using the motor only.
3) If the motor output shaft type is Gear Type, □ contains the model type name of the gearbox being attached.
4) The phase & voltage code A, B, C, D, E contain a built-in thermal protector.

Max. Permissible Torque at Output Shaft of Gearbox

60Hz

Motor Model	Gearbox Model	Gear Ratio	2	3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120	150	180	200
		r/min	900	600	500	360	300	240	200	180	144	120	100	90	72	60	50	45	36	30	24	20	18	15	12	10	9
9RDG*-90FP	9PBK□BH	kgfcm	8.9	13.3	16.0	22.2	26.6	33.3	39.9	44.4	50.0	60.0	72.0	80.0	90.4	108.5	130.2	144.6	180.8	200.0	200.0	200.0	200.0	200.0	200.0	200.0	200.0
	9PFK□BH	N.m	0.87	1.30	1.57	2.17	2.61	3.26	3.91	4.35	4.90	5.88	7.06	7.84	8.86	10.63	12.76	14.17	17.72	19.60	19.60	19.60	19.60	19.60	19.60	19.60	19.60
9RDG*-90FH	9HBK□BH	kgfcm	–	13.3	16.0	22.2	26.6	33.3	39.9	44.4	50.0	60.0	72.0	80.0	90.4	108.5	130.2	144.6	180.8	217.0	242.4	290.9	300.0	300.0	300.0	300.0	300.0
	9HFK□BH	N.m		1.30	1.57	2.17	2.61	3.26	3.91	4.35	4.90	5.88	7.06	7.84	8.86	10.63	12.76	14.17	17.72	21.26	23.76	28.51	29.40	29.40	29.40	29.40	29.40

Motor Model	Gearbox Model	Gear Ratio	10	12	15	18	25	30	36	50	60
		r/min	180	150	120	100	72	60	50	36	30
9RDG*-90FW	9WD□BL/□BR/□BRL	kgfcm	44.9	52.6	63.3	73.0	95.9	108.5	126.2	142.9	122.4
		N.m	4.40	5.15	6.20	7.15	9.40	10.63	12.37	14.00	12.00

Motor Model	Gearbox Model	Gear Ratio	5	7.5	10	15	20	25	30	40	50	60	80
		r/min	360	240	180	120	90	72	60	45	36	30	22
9RDG*-90FWH	9WHD□-030	kgfcm	19.1	27.6	35.5	50.0	63.1	72.3	84.2	103.4	118.3	131.5	132.7
		N.m	1.87	2.71	3.48	4.90	6.19	7.09	8.25	10.14	11.60	12.89	13.00

50Hz

Motor Model	Gearbox Model	Gear Ratio	2	3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120	150	180	200
		r/min	750	500	417	300	250	200	167	150	120	100	83	75	60	50	42	37.5	30	25	20	17	15	12.5	10	8	7.5
9RDG*-90FP	9PBK□BH	kgfcm	11.4	17.0	20.4	28.4	34.1	42.6	51.1	56.8	64.0	76.8	92.1	102.4	115.7	138.9	166.6	185.1	200.0	200.0	200.0	200.0	200.0	200.0	200.0	200.0	200.0
	9PFK□BH	N.m	1.11	1.67	2.00	2.78	3.34	4.18	5.01	5.57	6.27	7.53	9.03	10.03	11.34	13.61	16.33	18.14	19.60	19.60	19.60	19.60	19.60	19.60	19.60	19.60	19.60
9RDG*-90FH	9HBK□BH	kgfcm	–	17.0	20.4	28.4	34.1	42.6	51.1	56.8	64.0	76.8	92.1	102.4	115.7	138.9	166.6	185.1	231.4	277.7	300.0	300.0	300.0	300.0	300.0	300.0	300.0
	9HFK□BH	N.m		1.67	2.00	2.78	3.34	4.18	5.01	5.57	6.27	7.53	9.03	10.03	11.34	13.61	16.33	18.14	22.68	27.22	29.40	29.40	29.40	29.40	29.40	29.40	29.40

Motor Model	Gearbox Model	Gear Ratio	10	12	15	18	25	30	36	50	60
		r/min	150	125	100	83	60	50	42	30	25
9RDG*-90FW	9WD□BL/□BR/□BRL	kgfcm	57.5	67.3	81.0	93.4	122.7	138.9	153.1	142.9	122.4
		N.m	5.64	6.60	7.94	9.15	12.03	13.61	15.00	14.00	12.00

Motor Model	Gearbox Model	Gear Ratio	5	7.5	10	15	20	25	30	40	50	60	80
		r/min	300	200	150	100	75	60	50	38	30	25	18
9RDG*-90FWH	9WHD□-030	kgfcm	22.6	32.7	42.1	59.2	74.8	85.7	99.7	122.6	140.3	155.8	132.7
		N.m	2.21	3.21	4.12	5.80	7.33	8.40	9.77	12.01	13.75	15.27	13.00

1) Enter the phase & voltage code in the place * within the motor model name.
2) Enter the gear ratio in the place of □ within the gearbox model name.
3) A colored background indicates the gear shaft rotation in the same direction as the motor shaft
: a white background indicates the rotation in the opposite direction.
4) The rotating speed is calculated by dividing the motor's synchronous speed (50Hz: 1,500r/min, 60Hz: 1,800r/min) by the gear ratio.
The actual speed is 2~20% less than the displayed value, depending on the size of the load.

B AC Motors

Reversible Motor 90W(□90mm)

Dimensions

MOTOR ONLY

● MOTOR MODEL:
9RD□□-90F(-T) (GENERAL FAN)

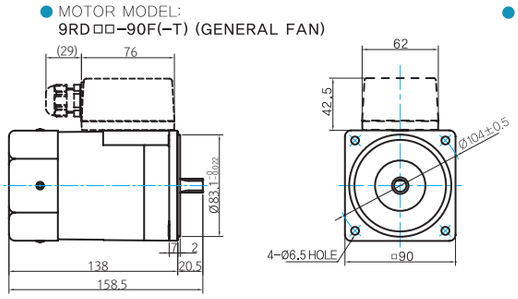

● MOTOR OUTPUT SHAFT

MODEL	SPEC
D-CUT TYPE	
9RDD□-90F	
KEY TYPE	
9RDK□-90F	

● KEY SPEC



INTER-DECIMAL GEARBOX

● MODEL: 9XD10□□



GEARED MOTOR

P TYPE GEARBOX

● MOTOR MODEL:
9RDG□-90FP (GENERAL FAN)

● GEARBOX MODEL:
9PBK□BH

● GEARBOX MODEL:
9PFK□BH

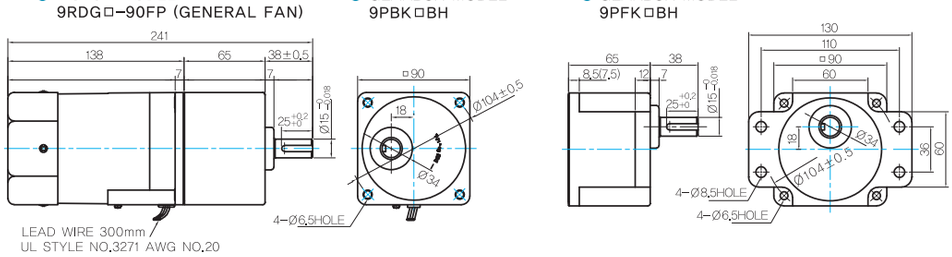

● GEARBOX OUTPUT SHAFT

MODEL	SPEC
KEY TYPE	
9PBK□BH 9PFK□BH	

● KEY SPEC



H TYPE GEARBOX

● MOTOR MODEL:
9RDG□-90FH (GENERAL FAN)

● GEARBOX MODEL:
9HBK□BH

● GEARBOX MODEL:
9HFK□BH

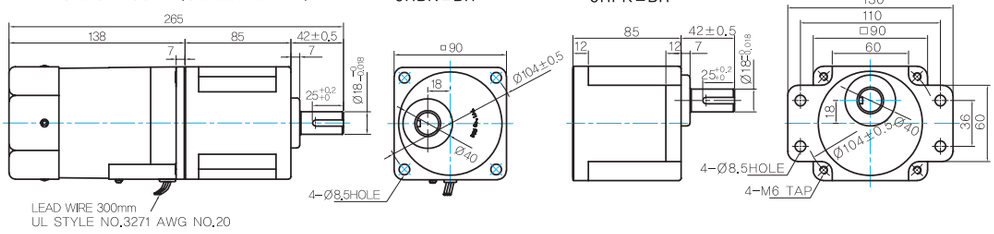

● GEARBOX OUTPUT SHAFT

MODEL	SPEC
KEY TYPE	
9HBK□BH 9HFK□BH	

● KEY SPEC



W TYPE GEARBOX

● MOTOR MODEL:
9RDG□-90FW (GENERAL FAN)

● GEARBOX MODEL:
9WD□BL/BR/BRL

● KEY SPEC



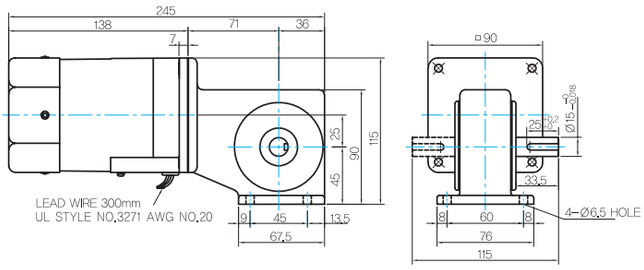

WH TYPE GEARBOX

● MOTOR MODEL:
9RDG□-90FWH (GENERAL FAN)

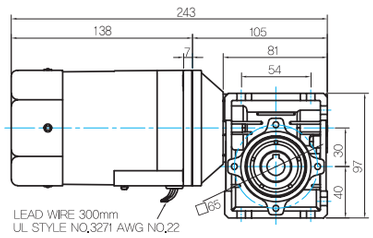

● GEARBOX MODEL:
9WHD□-030





● SHAFT



Unidirectional Bi-directional

● FLANGE





● KEY SPEC



WEIGHT

PART		WEIGHT(kg)
MOTOR		3.05
GEAR BOX	9PB(F)K2BH - 9PB(F)K10BH	1.28
	9PB(F)K12.5BH - 9PB(F)K20BH	1.30
	9PB(F)K25BH - 9PB(F)K60BH	1.45
	9PB(F)K75BH - 9PB(F)K200BH	1.47
	9HB(F)K3BH - 9HB(F)K10BH	1.62
	9HB(F)K12.5BH - 9HB(F)K20BH	1.68
	9HB(F)K25BH - 9HB(F)K60BH	1.73
	9HB(F)K75BH - 9HB(F)K200BH	1.78
	9WD□BL/BR/BRL	1.00
	9WHD□-030	1.20
	9XD10○○	0.60

*The output flange and shaft are sold separately.

Motor Images

9RDD□-90F	9RDD□-90F-T	9RDG□-90FP+9PBK□BH	9RDG□-90FP+9PFK□BH
9RDG□-90FH+9HBK□BH	**9RDG□-90FH+9HFK□BH**	**9RDG□-90FW+9WD□BL**	**9RDG□-90FWH+9WHD□**

Reversible Motor 90W(□ 90mm)

Connection Diagrams

Lead Wire Type	Terminal Box Type
	



Code	Contact Capacity
SW	AC125V 5A min. or AC250V 5A min. (Inductive load)
Ro, Co	Ro=5~200Ω Co=0.1~0.2μF, 200WV (400WV)

* Connect a CR circuit for surge suppression to protect the contact.

1) The direction of motor rotation is as viewed from the shaft end of the motor.
2) CW represents the clockwise direction, while CCW represents the counterclockwise direction.
3) During operation it is available to change the rotating direction by turning the switch to CW or CCW.

120W Reversible Motor 120W(□ 90mm)

Motor Specification

Model 9RDG*-120F□(-T): Gear Type Shaft 9RDD*-120F(-T): D-Cut Type Shaft 9RDK*-120F(-T): Key Type Shaft		Output	Voltage	Frequency	Poles	Duty	Starting Torque		Rated Load				Capacitor
									Speed	Current	Torque		
		W	V	Hz			kgfcm	N.m	r/min	A	kgfcm	N.m	μF / VAC
Lead Wire Type	Terminal Box Type												
9RD◇1(A)-120F□	9RD◇1(A)-120F□-T	120	1ø 110	60	4	30min.	7.11	0.711	1550	2.50	7.54	0.754	30.0 / 250
9RD◇2(D)-120F□	9RD◇2(D)-120F□-T	120	1ø 220	60	4	30min.	6.42	0.642	1600	1.08	7.31	0.731	6.5 / 450
9RD◇E-120F□	9RD◇E-120F□-T	120	1ø 220	50	4	30min.	6.28	0.628	1250	1.10	9.35	0.935	6.5 / 450
			1ø 240				7.50	0.750		1.21	9.35	0.935	

1) Enter the phase & voltage code in the place * within the motor model name.
2) Enter the output shaft type of motor in the place ◇ (G: Gear Type / D: D-Cut Type / K: Key Type). and D-Cut Type Shaft / Key Type Shaft are for using the motor only.
3) If the motor output shaft type is Gear Type, □ contains the model type name of the gearbox being attached.
4) The phase & voltage code A, D, E contain a built-in thermal protector.

Max. Permissible Torque at Output Shaft of Gearbox

60Hz

Motor Model	Gearbox Model	Gear Ratio	2	3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120	150	180	200
		r/min	900	600	500	360	300	240	200	180	144	120	100	90	72	60	50	45	36	30	24	20	18	15	12	10	9
9RDG*-120FP	9PBK□BH	kgfcm	11.8	17.8	21.3	29.6	35.5	44.4	53.3	59.2	66.7	80.0	96.0	106.7	120.5	144.6	173.6	192.9	200.0	200.0	200.0	200.0	200.0	200.0	200.0	200.0	200.0
	9PFK□BH	N.m	1.16	1.74	2.09	2.90	3.48	4.35	5.22	5.80	6.53	7.84	9.41	10.45	11.81	14.17	17.01	18.90	19.60	19.60	19.60	19.60	19.60	19.60	19.60	19.60	19.60
9RDG*-120FH	9HBK□BH	kgfcm	–	17.8	21.3	29.6	35.5	44.4	53.3	59.2	66.7	80.0	96.0	106.7	120.5	144.6	173.6	192.9	241.1	289.3	300.0	300.0	300.0	300.0	300.0	300.0	300.0
	9HFK□BH	N.m		1.74	2.09	2.90	3.48	4.35	5.22	5.80	6.53	7.84	9.41	10.45	11.81	14.17	17.01	18.90	23.62	28.35	29.40	29.40	29.40	29.40	29.40	29.40	29.40

Motor Model	Gearbox Model	Gear Ratio	10	12	15	18	25	30	36	50	60
		r/min	180	150	120	100	72	60	50	36	30
9RDG*-120FW	9WD□BL/□BR/□BRL	kgfcm	59.9	70.1	84.4	97.3	127.8	144.6	153.1	142.9	122.4
		N.m	5.87	6.87	8.27	9.54	12.53	14.17	15.00	14.00	12.00

Motor Model	Gearbox Model	Gear Ratio	5	7.5	10	15	20	25	30	40	50	60	80
		r/min	360	240	180	120	90	72	60	45	36	30	22
9RDG*-120FWH	9WHD□-030	kgfcm	25.4	36.8	47.3	66.6	84.2	96.4	112.2	137.9	157.8	163.3	132.7
		N.m	2.49	3.61	4.64	6.53	8.25	9.45	11.00	13.52	15.46	16.00	13.00

50Hz

Motor Model	Gearbox Model	Gear Ratio	2	3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120	150	180	200
		r/min	750	500	417	300	250	200	167	150	120	100	83	75	60	50	42	37.5	30	25	20	17	15	12.5	10	8	7.5
9RDG*-120FP	9PBK□BH	kgfcm	15.1	22.7	27.3	37.9	45.4	56.8	68.2	75.7	85.3	102.4	122.9	136.5	154.3	185.1	200.0	200.0	200.0	200.0	200.0	200.0	200.0	200.0	200.0	200.0	200.0
	9PFK□BH	N.m	1.48	2.23	2.67	3.71	4.45	5.57	6.68	7.42	8.36	10.03	12.04	13.38	15.12	18.14	19.60	19.60	19.60	19.60	19.60	19.60	19.60	19.60	19.60	19.60	19.60
9RDG*-120FH	9HBK□BH	kgfcm	–	22.7	27.3	37.9	45.4	56.8	68.2	75.7	85.3	102.4	122.9	136.5	154.3	185.1	222.2	246.9	300.0	300.0	300.0	300.0	300.0	300.0	300.0	300.0	300.0
	9HFK□BH	N.m		2.23	2.67	3.71	4.45	5.57	6.68	7.42	8.36	10.03	12.04	13.38	15.12	18.14	21.77	24.19	29.40	29.40	29.40	29.40	29.40	29.40	29.40	29.40	29.40

Motor Model	Gearbox Model	Gear Ratio	10	12	15	18	25	30	36	50	60
		r/min	150	125	100	83	60	50	42	30	25
9RDG*-120FW	9WD□BL/□BR/□BRL	kgfcm	76.7	89.8	108.0	124.5	163.6	170.0	153.1	142.9	122.4
		N.m	7.51	8.80	10.58	12.21	16.04	16.66	15.00	14.00	12.00

Motor Model	Gearbox Model	Gear Ratio	5	7.5	10	15	20	25	30	40	50	60	80
		r/min	300	200	150	100	75	60	50	38	30	25	18
9RDG*-120FWH	9WHD□-030	kgfcm	30.1	43.6	56.1	79.0	99.7	114.3	133.0	163.5	173.5	163.3	132.7
		N.m	2.95	4.28	5.50	7.74	9.77	11.20	13.03	16.02	17.00	16.00	13.00

1) Enter the phase & voltage code in the place * within the motor model name.
2) Enter the gear ratio in the place of □ within the gearbox model name.
3) A colored background indicates the gear shaft rotation in the same direction as the motor shaft
; a white background indicates the rotation in the opposite direction.
4) The rotating speed is calculated by dividing the motor's synchronous speed (50Hz: 1,500r/min, 60Hz: 1,800r/min) by the gear ratio.
The actual speed is 2~20% less than the displayed value, depending on the size of the load.

B AC Motors

Reversible Motor 120W(□90mm)

Dimensions

MOTOR ONLY

● MOTOR MODEL:
9RD□□–120F(–T) (GENERAL FAN)

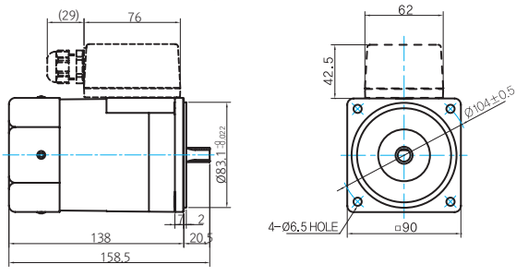

● MOTOR OUTPUT SHAFT ● KEY SPEC

MODEL	SPEC
D-CUT TYPE	
9RDD□–120F	
KEY TYPE	
9RDK□–120F	



INTER-DECIMAL GEARBOX

● MODEL: 9XD10□□



GEARED MOTOR

P TYPE GEARBOX

● MOTOR MODEL:
9RDG□–120FP (GENERAL FAN)



● GEARBOX MODEL:
9PBK□BH



● GEARBOX MODEL:
9PFK□BH

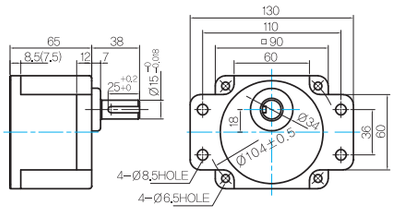

● GEARBOX OUTPUT SHAFT

MODEL	SPEC
KEY TYPE	
9PBK□BH 9PFK□BH	

● KEY SPEC

GEARBOX



H TYPE GEARBOX

● MOTOR MODEL:
9RDG□–120FH (GENERAL FAN)

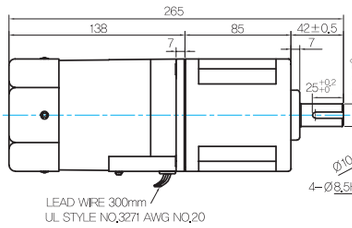

● GEARBOX MODEL:
9HBK□BH



● GEARBOX MODEL:
9HFK□BH

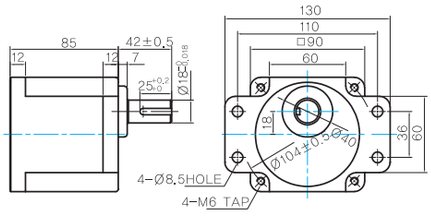

● GEARBOX OUTPUT SHAFT

MODEL	SPEC
KEY TYPE	
9HBK□BH 9HFK□BH	

● KEY SPEC

GEARBOX



W TYPE GEARBOX

● MOTOR MODEL:
9RDG□–120FW (GENERAL FAN)

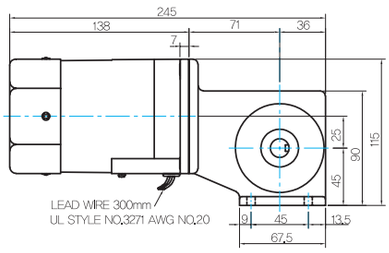

● GEARBOX MODEL:
9WD□BL/BR/BRL



● KEY SPEC

GEARBOX



WH TYPE GEARBOX

● MOTOR MODEL:
9RDG□-120FWH (GENERAL FAN)

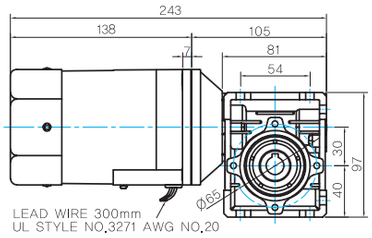

● GEARBOX MODEL:
9WHD□-030



● SHAFT

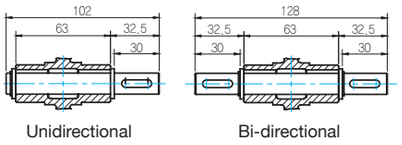

● FLANGE

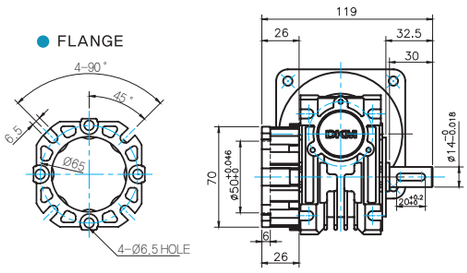

● KEY SPEC



WEIGHT

PART		WEIGHT(kg)
MOTOR		3.05
GEAR BOX	9PB(F)K2BH - 9PB(F)K10BH	1.28
	9PB(F)K12.5BH - 9PB(F)K20BH	1.30
	9PB(F)K25BH - 9PB(F)K60BH	1.45
	9PB(F)K75BH - 9PB(F)K200BH	1.47
	9HB(F)K3BH - 9HB(F)K10BH	1.62
	9HB(F)K12.5BH - 9HB(F)K20BH	1.68
	9HB(F)K25BH - 9HB(F)K60BH	1.73
	9HB(F)K75BH - 9HB(F)K200BH	1.78
	9WD□BL/BR/BRL	1.00
	9WHD□-030	1.20
	9XD10○○	0.60

*The output flange and shaft are sold separately.

Motor Images

9RDD□-120F	9RDD□-120F-T	9RDG□-120FP+9PBK□BH	9RDG□-120FP+9PFK□BH
9RDG□-120FH+9HBK□BH	**9RDG□-120FH+9HFK□BH**	**9RDG□-120FW+9WD□BL**	**9RDG□-120FWH+9WHD□**

Connection Diagrams

Lead Wire Type	Terminal Box Type	
		

Code	Contact Capacity
SW	AC125V 5A min. or AC250V 5A min. (Inductive load)
Ro, Co	Ro=5~200Ω Co=0.1~0.2μF, 200WV (400WV)

* Connect a CR circuit for surge suppression to protect the contact.

1) The direction of motor rotation is as viewed from the shaft end of the motor.
2) CW represents the clockwise direction, while CCW represents the counterclockwise direction.
3) During operation it is available to change the rotating direction by turning the switch to CW or CCW.

180W Reversible Motor 180W(□90mm)

Motor Specification

Model 9RDG*-180F□(-T): Gear Type Shaft 9RDD*-180F(-T): D-Cut Type Shaft 9RDK*-180F(-T): Key Type Shaft		Output	Voltage	Frequency	Poles	Duty	Starting Torque		Rated Load				Capacitor
									Speed	Current	Torque		
		W	V	Hz			kgfcm	N.m	r/min	A	kgfcm	N.m	μF / VAC
Lead Wire Type	Terminal Box Type												
9RD◇1(A)-180F□	9RD◇1(A)-180F□-T	180	1ø 110	60	4	30min.	7.40	0.740	1600	3.00	10.96	1.096	30.0 / 250
9RD◇2(D)-180F□	9RD◇2(D)-180F□-T	180	1ø 220	60	4	30min.	7.40	0.740	1600	1.50	10.96	1.096	8.0 / 450
9RD◇E-180F□	9RD◇E-180F□-T	180	1ø 220	50	4	30min.	7.00	0.700	1250	1.50	14.03	1.403	8.0 / 450
			1ø 240				7.80	0.780	1300	1.60	13.49	1.349	

1) Enter the phase & voltage code in the place * within the motor model name.
2) Enter the output shaft type of motor in the place ◇ (G: Gear Type / D: D-Cut Type / K: Key Type). and D-Cut Type Shaft / Key Type Shaft are for using the motor only.
3) If the motor output shaft type is Gear Type, □ contains the model type name of the gearbox being attached.
4) The phase & voltage code A, D, E contain a built-in thermal protector.

Max. Permissible Torque at Output Shaft of Gearbox

60Hz

Motor Model	Gearbox Model	Gear Ratio	3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120	150	180	200
		r/min	600	500	360	300	240	200	180	144	120	100	90	72	60	50	45	36	30	24	20	18	15	12	10	9
9RDG*-180FH	9HBK□BH	kgfcm	26.6	32.0	44.4	53.3	66.6	79.9	88.8	100.0	120.0	144.0	160.0	180.8	217.0	260.4	289.3	300.0	300.0	300.0	300.0	300.0	300.0	300.0	300.0	300.0
	9HFK□BH	N.m	2.61	3.13	4.35	5.22	6.52	7.83	8.70	9.80	11.76	14.11	15.68	17.72	21.26	25.51	28.35	29.40	29.40	29.40	29.40	29.40	29.40	29.40	29.40	29.40

Motor Model	Gearbox Model	Gear Ratio	5	7.5	10	15	20	25	30	40	50	60	80	100
		r/min	360	240	180	120	90	72	60	45	36	30	22	18
9RDG*-180FWH	9WHD□-030	kgfcm	38.1	55.2	71.0	99.9	126.2	144.6	168.3	183.7	173.5	163.3	132.7	-
		N.m	3.74	5.41	6.96	9.79	12.37	14.17	16.49	18.00	17.00	16.00	13.00	-
	9WHD□-040	kgfcm	-	-	-	-	-	-	-	-	267.4	299.8	295.0	270.0
		N.m	-	-	-	-	-	-	-	-	26.20	29.38	28.91	26.46

50Hz

Motor Model	Gearbox Model	Gear Ratio	3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120	150	180	200
		r/min	500	417	300	250	200	167	150	120	100	83	75	60	50	42	37.5	30	25	20	17	15	12.5	10	8	7.5
9RDG*-180FH	9HBK□BH	kgfcm	32.8	39.3	54.6	65.5	81.9	98.3	109.2	123.1	147.7	177.2	196.9	222.5	267.0	300.0	300.0	300.0	300.0	300.0	300.0	300.0	300.0	300.0	300.0	300.0
	9HFK□BH	N.m	3.21	3.85	5.35	6.42	8.03	9.63	10.71	12.06	14.47	17.37	19.30	21.81	26.17	29.40	29.40	29.40	29.40	29.40	29.40	29.40	29.40	29.40	29.40	29.40

Motor Model	Gearbox Model	Gear Ratio	5	7.5	10	15	20	25	30	40	50	60	80	100
		r/min	300	200	150	100	75	60	50	38	30	25	18	15
9RDG*-180FWH	9WHD□-030	kgfcm	46.9	68.0	87.4	123.0	155.4	178.0	204.1	183.7	173.5	163.3	132.7	-
		N.m	4.60	6.66	8.56	12.05	15.23	17.45	20.00	18.00	17.00	16.00	13.00	-
	9WHD□-040	kgfcm	-	-	-	-	-	-	-	-	329.1	330.0	295.0	270.0
			-	-	-	-	-	-	-	-	32.25	32.34	28.91	26.46

1) Enter the phase & voltage code in the place * within the motor model name.
2) Enter the gear ratio in the place of □ within the gearbox model name.
3) A colored background indicates the gear shaft rotation in the same direction as the motor shaft
; a white background indicates the rotation in the opposite direction.
4) The rotating speed is calculated by dividing the motor's synchronous speed (50Hz: 1,500r/min, 60Hz: 1,800r/min) by the gear ratio.
The actual speed is 2~20% less than the displayed value, depending on the size of the load.

Dimensions

MOTOR ONLY

● MOTOR MODEL:
9RD□□-180F(-T) (GENERAL FAN)

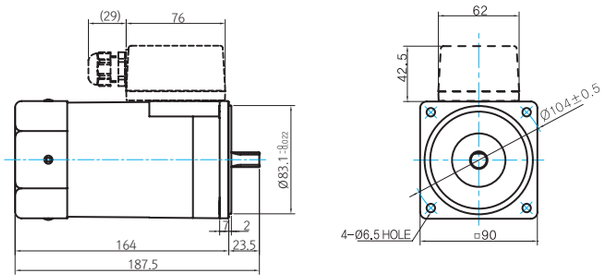

● MOTOR OUTPUT SHAFT

MODEL	SPEC
D-CUT TYPE	
9RDD□-180F	
KEY TYPE	
9RDK□-180F	

● KEY SPEC

MOTOR



GEARED MOTOR

H TYPE GEARBOX

● MOTOR MODEL:
9RDG□-180FH (GENERAL FAN)

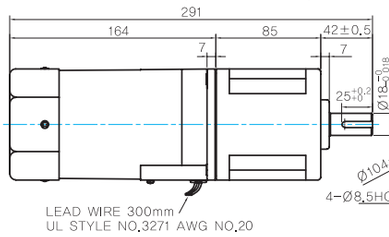

● GEARBOX MODEL:
9HBK□BH



● GEARBOX MODEL:
9HFK□BH

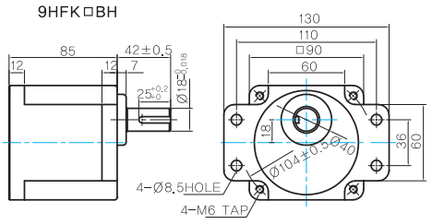

● GEARBOX OUTPUT SHAFT

MODEL	SPEC
KEY TYPE	
9HBK□BH 9HFK□BH	

● KEY SPEC

GEARBOX



WH TYPE GEARBOX

● MOTOR MODEL:
9RDG□-180FWH (GENERAL FAN)

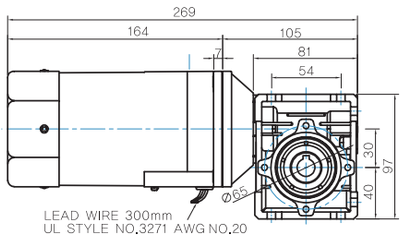

● GEARBOX MODEL:
9WHD□-030



● SHAFT

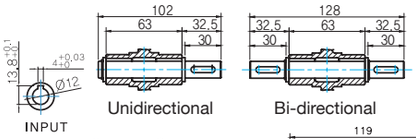

● FLANGE

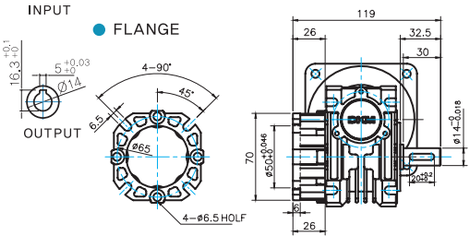

● KEY SPEC

GEARBOX



B AC Motors

Reversible Motor 180W(□90mm)

● MOTOR MODEL:
9RDG□-180FWH (GENERAL FAN)

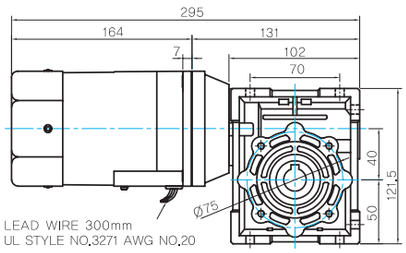

● GEARBOX MODEL:
9WHD□-040

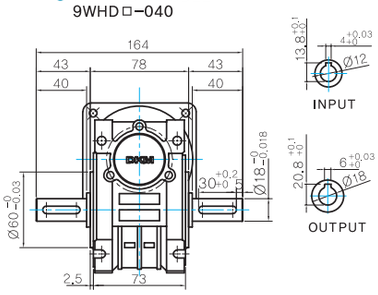

● SHAFT



● FLANGE



● KEY SPEC

GEARBOX



WEIGHT

PART		WEIGHT(kg)
MOTOR		3.05
GEAR BOX	9HB(F)K3BH - 9HB(F)K10BH	1.62
	9HB(F)K12.5BH - 9HB(F)K20BH	1.68
	9HB(F)K25BH - 9HB(F)K60BH	1.73
	9HB(F)K75BH - 9HB(F)K200BH	1.78
	9WHD□-030	1.20
	9WHD□-040	2.10
	9XD10○○	0.60

*The output flange and shaft are sold separately.

Motor Images

9RDD□-180F	9RDD□-180F-T	9RDG□-180FH+9HBK□BH	9RDG□-180FH+9HFK□BH

9RDG□-180FWH+9WHD□

Connection Diagrams

Lead Wire Type	Terminal Box Type
	



Code	Contact Capacity
SW	AC125V 5A min. or AC250V 5A min. (Inductive load)
Ro, Co	Ro=5~200Ω Co=0.1~0.2μF, 200WV (400WV)

* Connect a CR circuit for surge suppression to protect the contact.

1) The direction of motor rotation is as viewed from the shaft end of the motor.
2) CW represents the clockwise direction, while CCW represents the counterclockwise direction.
3) During operation it is available to change the rotating direction by turning the switch to CW or CCW.

Brake Motor

Index

Outline of Brake Motor	B-113
Brake Motor 6W (□60mm)	B-115
Brake Motor 6W (□70mm)	B-117
Brake Motor 10W (□70mm)	B-119
Brake Motor 15W (□70mm)	B-121
Brake Motor 15W (□80mm)	B-123
Brake Motor 25W (□80mm)	B-126
Brake Motor 40W (□90mm)	B-129
Brake Motor 60W (□90mm)	B-132
Brake Motor 90W (□90mm)	B-136
Brake Motor 120W (□90mm)	B-140
Brake Motor 150W (□90mm)	B-144
Brake Motor 180W (□90mm)	B-147
Brake Motor 200W (□90mm)	B-150
Brake Motor 250W (□104mm)	B-153
Brake Motor 300W (□104mm)	B-156
Brake Motor 400W (□104mm)	B-159

Outline of Brake Motor

Power Off Activated Type Electromagnetic Brake

AC electromagnetic brake is mounted on the brake motors. When the power source is turned off, the brake is activated and the motor stops instantaneously and holds the load. Brake motors are commonly used in motion control applications for stopping or holding a load (or both), especially on vertical axes or for emergency stop functionality.

Operation

- There are 2~3 times of overrun rotation at the time the power is turned off as an individual motor.(Induction motor: 30~40 times overrun, Reversible motor: 5~6 times overrun)
- The frequent and instantaneous directional changes are possible. By a simple control, it is possible to make 6 stops per a minute with more than 3 seconds of stoppage. Roughly the operating cycle is 50 cylces per a minute or less. (Note: This value is based merely on brake response. And this value is maximum, so it may not be possible to repeat braking operation at this frequency. Please make the treatment so that the surface of the motor case remains below 90℃.)
- The motor and the brake use the same power source. (For example, if motor voltage is 110V, that of brake is 110V.)

Structure

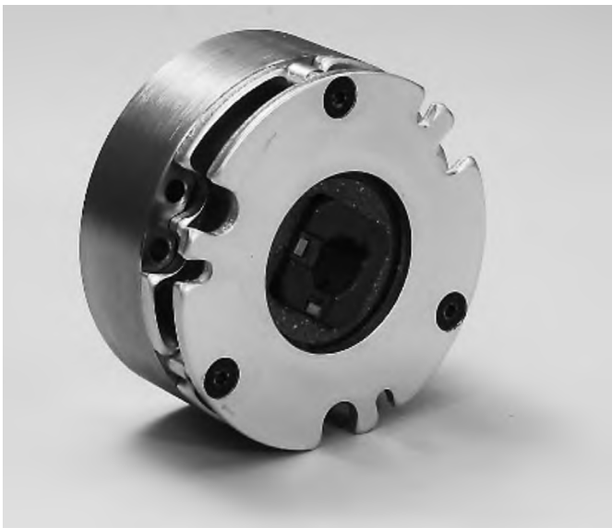

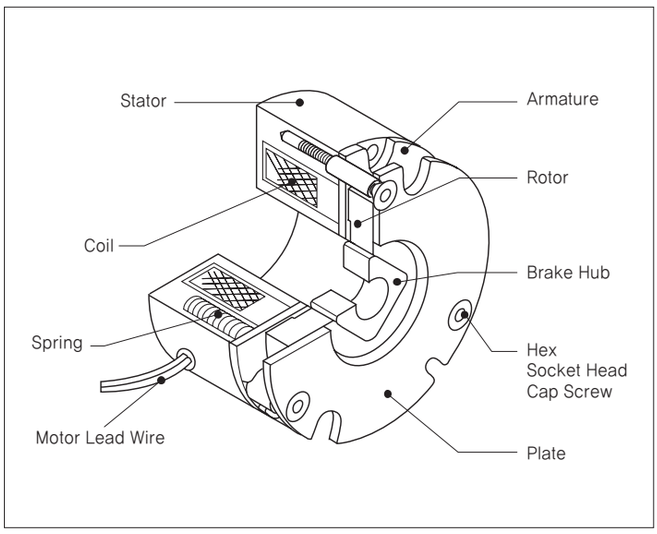

General Specifications

Item	Specification
Insulation Resistance	100MΩ or more when DC500V MEGA is applied between the windings and the frame after rated motor operation under normal ambient temperature and humidity.
Dielectric Strength	Sufficient to withstand 1.5KV at 50Hz and 60Hz applied between the windings and the frame for 1 minute after rated motor operation under normal ambient temperature and humidity.
Temperature Rise	Temperature rise of windings are 80℃ or less measured by the resistance change method after rated motor operation with connecting a gearbox or equivalent heat radiation plate.
Insulation Class	Class B [130℃]
Overheat Protection	Operating temperature (Built-in thermal protector type motor): Open 120℃±5℃, Close 90℃±5℃
Ambient Temperature	-10℃~+40℃ (Three phase 220VAC: -10℃~+50℃)
Ambient Humidity	85% maximum

Brake Specifications

Brake Motor			Brake Model	commutator	Coil (at 20℃)				Static Friction Torque [N.m]	Shaft Dia.
Frame	Output	Voltage			Voltage[V]	Output[W]	Current[A]	Resistance[Ω]		
60mm	6W	110	BXW-01-10M	BEM-2T	45	2.4	0.053	845	0.05	Φ6
		220	BXW-01-10M		90		0.027	3382	0.05	
70mm	6W	110	BXW-02-10M	BEM-2T	45	2.8	0.062	724	0.10	Φ7
	10W	220			90		0.031	2898	0.10	
80mm	15W 25W	110	BXW-03-10M	BEM-2T BEM-4T	45	4.3	0.095	471	0.20	Φ8
		220			90		0.048	1886	0.20	
		380			180		0.024	7543	0.20	
90mm	40W 60W	110	BXW-04-10M-05	BEM-2T BEM-4T	45	6.8	0.151	297	0.50	
		220			90		0.076	1190	0.50	
		380			180		0.038	4762	0.50	
	90W ~ 200W	110	BXW-04-10M-10	BEM-2T BEM-4T	45	10	0.222	202	1.0	Φ10
		220			90		0.111	810	1.0	
		380			180		0.056	3241	1.0	
104mm	250W ~ 400W	220	BXW-05-10L	BEM-2T BEM-4T	90 180	13	0.144	623	2.0	Φ12
		380					0.072	2492	2.0	
		440					0.072	2492	2.0	
DSY	100W ~ 200W	220	BXW-05-10L	BEM-2T BEM-4T	90	13	0.144	623	2.0	Φ12
		380			180		0.072	2492	2.0	
		440			180		0.072	2492	2.0	
	400W	220	BXL-08-10J	BEM-4T	99	19	0.192	516	4.0	Φ14
		380			198		0.096	2063	4.0	
		440			198		0.096	2063	4.0	

Connection Diagrams

Single Phase

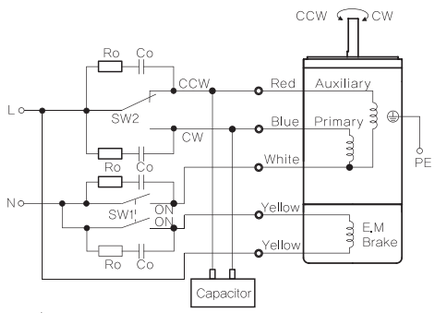

*** Rotation Direction:**
To rotate the motor in a clockwise (CW) direction, turn SW2 to CW.
To rotate the motor in a counterclockwise (CCW) direction, turn SW2 to CCW.

Switch No.	Specifications		Note
	Single Phase 110V/115V Input	Single Phase 220V/230V Input	
SW1	AC 125V 3A minimum (Inductive load)	AC 250V 1.5A minimum (Inductive load)	Switched Simultaneously
SW2			–

Three Phase

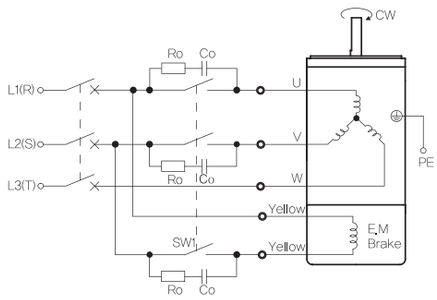

*** CCW Direction:**
Change any two connections between R, S and T.

Switch No.	Specifications	Note
SW1	AC 250V 1.5A minimum (Inductive load)	Switched Simultaneously

INPUT \ LEAD WIRE	U	V	W
3Φ 200V-230V (3, G, J)	WHITE	RED	BLACK
3Φ 380V-400V (4, K)	WHITE	BLUE	BLACK
3Φ 415V-440V (5, L)	WHITE	YELLOW	BLACK

1) SW1 is for motor operation/stop and electronic brake control. (interlocked)
2) When SW1 is turned On, the brake is released and the motor is rotated. When SW1 is turned OFF, the motor is stopped and the brake is applied.
3) To release the brake with the motor stopped, set SW1 to non-interlocked mode and turn on only the switch on the yellow lead wire side.
4) Ro and Co indicate CR circuit for surge suppression. [Ro=5~200Ω, Co=0.1~0.2μF, 200WV (400WV)]
5) When using the inverter, please use the brake power separately. When using the inverter output power, the brake operation power may not be supplied normally depending on the operating frequency.

6W Brake Motor 6W(□60mm)

Motor Specification

Model 6BDG*-6G: Gear Type Shaft 6BDD*-6: D-Cut Type Shaft Lead Wire Type	Output W	Voltage V	Frequency Hz	Poles	Duty	Starting Torque kgfcm	Starting Torque N.m	Rated Load Speed r/min	Rated Load Current A	Rated Load Torque kgfcm	Rated Load Torque N.m	Capacitor μF / VAC
6BD◇1(A)-6□	6	1ø 110	60	4	30min.	0.60	0.060	1550	0.25	0.38	0.038	3.0 / 250
6BD◇B-6□	6	1ø 100	50	4	30min.	0.64	0.064	1250	0.23	0.47	0.047	3.5 / 250
			60			0.61	0.061	1550	0.24	0.38	0.038	
6BD◇C-6□	6	1ø 200	50	4	30min.	0.65	0.065	1250	0.13	0.47	0.047	1.0 / 450
			60			0.61	0.061	1550	0.14	0.38	0.038	
6BD◇2(D)-6□	6	1ø 220	60	4	30min.	0.62	0.062	1550	0.15	0.38	0.038	1.0 / 450
6BD◇E-6□	6	1ø 220	50	4	30min.	0.50	0.050	1200	0.10	0.49	0.049	0.7 / 450
		1ø 240				0.55	0.055		0.11	0.49	0.049	
6BD◇3(G)-6□	6	3ø 220	50	4	Cont.	1.20	0.120	1250	0.13	0.47	0.047	–
			60			0.90	0.090	1550	0.11	0.38	0.038	
		3ø 230	50	4	Cont.	1.30	0.130	1250	0.14	0.47	0.047	
			60			1.00	0.100	1550	0.12	0.38	0.038	

1) Enter the phase & voltage code in the place * within the motor model name.
2) Enter the output shaft type of motor in the place ◇ (G: Gear Type / D: D-Cut Type), and D-Cut Type Shaft is for using the motor only.
3) If the motor output shaft type is Gear Type, □ contains the model type name of the gearbox being attached.
4) Impedance Protected Type

Max. Permissible Torque at Output Shaft of Gearbox

60Hz

Motor Model	Gearbox Model	Gear Ratio	3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90
		r/min	600	500	360	300	240	200	180	144	120	100	90	72	60	50	45	36	30	24	20
6BDG*-6G	6GBD□MH	kgfcm	0.9	1.1	1.5	1.8	2.3	2.7	3.1	3.8	4.6	5.5	5.5	6.9	8.3	9.9	11.0	12.4	14.9	18.7	22.4
		N.m	0.09	0.11	0.15	0.18	0.22	0.27	0.30	0.37	0.45	0.54	0.54	0.67	0.81	0.97	1.08	1.22	1.46	1.83	2.19

Motor Model	Gearbox Model	Gear Ratio	100	120	150	180	200	250
		r/min	18	15	12	10	9	7.2
6BDG*-6G	6GBD□MH	kgfcm	24.9	29.9	30.0	30.0	30.0	30.0
		N.m	2.44	2.93	2.94	2.94	2.94	2.94

50Hz

Motor Model	Gearbox Model	Gear Ratio	3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90
		r/min	500	417	300	250	200	166	150	120	100	83	75	60	50	41	37	30	25	20	16
6BDG*-6G	6GBD□MH	kgfcm	1.2	1.4	2.0	2.4	3.0	3.6	3.9	4.9	5.9	7.1	7.1	8.9	10.7	12.8	14.2	16.1	19.3	24.1	28.9
		N.m	0.12	0.14	0.19	0.23	0.29	0.35	0.39	0.48	0.58	0.70	0.70	0.87	1.05	1.25	1.39	1.57	1.89	2.36	2.83

Motor Model	Gearbox Model	Gear Ratio	100	120	150	180	200	250
		r/min	15	12	10	8	7.5	6
6BDG*-6G	6GBD□MH	kgfcm	30.0	30.0	30.0	30.0	30.0	30.0
		N.m	2.94	2.94	2.94	2.94	2.94	2.94

1) Enter the phase & voltage code in the place * within the motor model name.
2) Enter the gear ratio in the place of □ within the gearbox model name.
3) A colored background indicates the gear shaft rotation in the same direction as the motor shaft : a white background indicates the rotation in the opposite direction.
4) The rotating speed is calculated by dividing the motor's synchronous speed (50Hz: 1,500r/min, 60Hz: 1,800r/min) by the gear ratio.
The actual speed is 2~20% less than the displayed value, depending on the size of the load.

Motor Images

6BDD□-6	6BDG□-6G+6GBD□MH

Dimensions

MOTOR ONLY

● MOTOR MODEL: 6BD□□-6 (NO FAN)

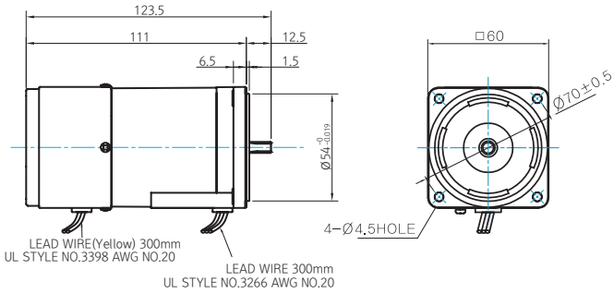

● MOTOR OUTPUT SHAFT

MODEL	SPEC
D-CUT TYPE	
6BDD□-6	

GEARED MOTOR

G TYPE GEARBOX

● MOTOR MODEL: 6BDG□-6G (NO FAN)

● GEARBOX MODEL: 6GBD□MH

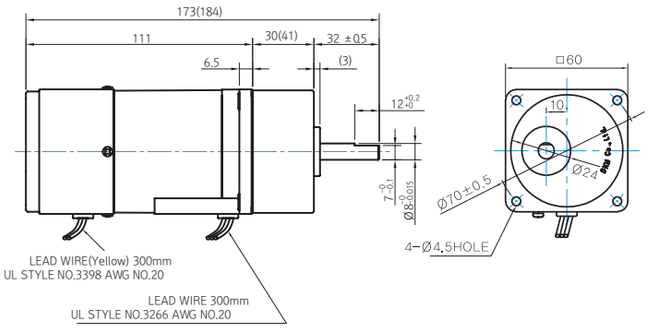

● GEARBOX OUTPUT SHAFT

MODEL	SPEC
KEY TYPE	
6GBD□MH	

● 30(41)-Table1

SIZE(mm)	GEAR RATIO
30	6GBD3MH – 6GBD18MH
41	6GBD25MH – 6GBD180MH

WEIGHT

PART		WEIGHT(kg)
MOTOR		1.12
GEAR BOX	6GBD3MH - 6GBD18MH	0.30
	6GBD20MH - 6GBD40MH	0.32
	6GBD50MH - 6GBD250MH	0.34

*The output flange and shaft are sold separately.

Connection Diagrams

Single Phase

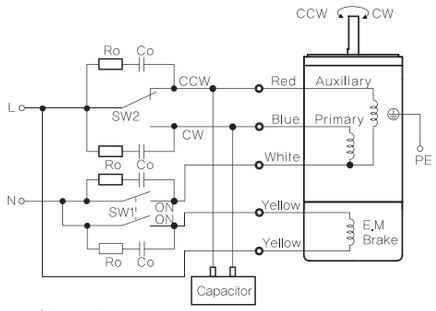

* Rotation Direction:
To rotate the motor in a clockwise (CW) direction, turn SW2 to CW.
To rotate the motor in a counterclockwise (CCW) direction, turn SW2 to CCW.

Switch No.	Specifications		Note
	Single Phase 110V/115V Input	Single Phase 220V/230V Input	
SW1	AC 125V 3A minimum (Inductive load)	AC 250V 1.5A minimum (Inductive load)	Switched Simultaneously
SW2			–

Three Phase

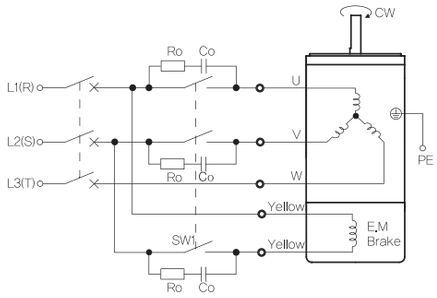

* CCW Direction:
Change any two connections between R, S and T.

Switch No.	Specifications	Note
SW1	AC 250V 1.5A minimum (Inductive load)	Switched Simultaneously

INPUT \ LEAD WIRE	U	V	W
3Φ 200V-230V (3, G, J)	WHITE	RED	BLACK
3Φ 380V-400V (4, K)	WHITE	BLUE	BLACK
3Φ 415V-440V (5, L)	WHITE	YELLOW	BLACK

1) SW1 is for motor operation/stop and electronic brake control. (interlocked) 2) When SW1 is turned On, the brake is released and the motor is rotated. When SW1 is turned OFF, the motor is stopped and the brake is applied. 3) To release the brake with the motor stopped, set SW1 to non-interlocked mode and turn on only the switch on the yellow lead wire side. 4) Ro and Co indicate CR circuit for surge suppression. [Ro=5~200Ω, Co=0.1~0.2μF, 200WV (400WV)] 5) When using the inverter, please use the brake power separately. When using the inverter output power, the brake operation power may not be supplied normally depending on the operating frequency.

6W Brake Motor 6W(□70mm)

Motor Specification

Model 7BDG*-6G: Gear Type Shaft 7BDD*-6: D-Cut Type Shaft Lead Wire Type	Output W	Voltage V	Frequency Hz	Poles	Duty	Starting Torque kgfcm	Starting Torque N.m	Rated Load Speed r/min	Rated Load Current A	Rated Load Torque kgfcm	Rated Load Torque N.m	Capacitor μF / VAC
7BD◇1(A)-6□	6	1ø 110	60	4	30min.	0.56	0.056	1600	0.27	0.37	0.037	3.0 / 250
7BD◇B-6□	6	1ø 100	50	4	30min.	0.66	0.066	1300	0.29	0.45	0.045	3.5 / 250
			60			0.63	0.063	1600	0.25	0.37	0.037	
7BD◇C-6□	6	1ø 200	50	4	30min.	0.67	0.067	1300	0.17	0.45	0.045	1.0 / 450
			60			0.64	0.064	1600	0.15	0.37	0.037	
7BD◇2(D)-6□	6	1ø 220	60	4	30min.	0.75	0.075	1600	0.17	0.37	0.037	1.0 / 450
7BD◇E-6□	6	1ø 220	50	4	30min.	0.61	0.061	1250	0.15	0.47	0.047	0.8 / 450
		1ø 240				0.72	0.072		0.17	0.47	0.047	

1) Enter the phase & voltage code in the place * within the motor model name. 2) Enter the output shaft type of motor in the place ◇ (G: Gear Type / D: D-Cut Type). and D-Cut Type Shaft is for using the motor only. 3) If the motor output shaft type is Gear Type, □ contains the model type name of the gearbox being attached. 4) The phase & voltage code A, B, C, D, E contain a built-in thermal protector.

Max. Permissible Torque at Output Shaft of Gearbox

60Hz

Motor Model	Gearbox Model	Gear Ratio	3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90
		r/min	600	500	360	300	240	200	180	144	120	100	90	72	60	50	45	36	30	24	20
7BDG*-6G	7GBK□BMH	kgfcm	0.9	1.1	1.5	1.8	2.2	2.7	3.0	3.7	4.4	5.3	5.3	6.7	8.0	9.6	10.7	12.1	14.5	18.1	22.4
		N.m	0.09	0.10	0.14	0.17	0.22	0.26	0.29	0.36	0.43	0.52	0.52	0.65	0.78	0.94	1.05	1.18	1.42	1.77	2.19

Motor Model	Gearbox Model	Gear Ratio	100	120	150	180	200
		r/min	18	15	12	10	9
7BDG*-6G	7GBK□BMH	kgfcm	24.1	28.9	36.2	43.4	48.2
		N.m	2.36	2.83	3.54	4.25	4.72

50Hz

Motor Model	Gearbox Model	Gear Ratio	3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90
		r/min	500	417	300	250	200	167	150	120	100	83	75	60	50	42	38	30	25	20	16
7BDG*-6G	7GBK□BMH	kgfcm	1.1	1.3	1.8	2.2	2.7	3.3	3.6	4.6	5.5	6.6	6.6	8.2	9.8	11.8	13.1	14.8	17.8	22.3	26.7
		N.m	0.107	0.13	0.18	0.21	0.27	0.32	0.36	0.45	0.54	0.64	0.64	0.80	0.96	1.16	1.29	1.45	1.74	2.18	2.62

Motor Model	Gearbox Model	Gear Ratio	100	120	150	180	200
		r/min	15	12.5	10	8	7.5
7BDG*-6G	7GBK□BMH	kgfcm	29.7	35.6	44.5	50.0	50.0
		N.m	2.91	3.49	4.36	4.90	4.90

1) Enter the phase & voltage code in the place * within the motor model name.
2) Enter the gear ratio in the place of □ within the gearbox model name.
3) A colored background indicates the gear shaft rotation in the same direction as the motor shaft ; a white background indicates the rotation in the opposite direction.
4) The rotating speed is calculated by dividing the motor's synchronous speed (50Hz: 1,500r/min, 60Hz: 1,800r/min) by the gear ratio.
The actual speed is 2~20% less than the displayed value, depending on the size of the load.

Dimensions

MOTOR ONLY

● MOTOR MODEL: 7BD□□-6(NO FAN)





● MOTOR OUTPUT SHAFT

MODEL	SPEC
D-CUT TYPE	
7BDD□-6	

GEARED MOTOR

G TYPE GEARBOX

● MOTOR MODEL:
7BDG□-6G (NO FAN)

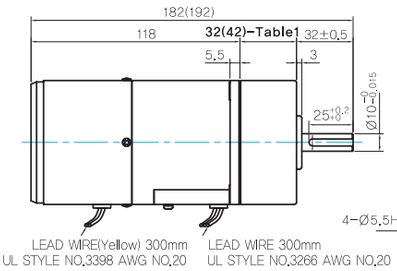

● GEARBOX MODEL:
7GBK□BMH



● GEARBOX OUTPUT SHAFT

MODEL	SPEC
KEY TYPE	
7GBK□BMH	

● KEY SPEC

GEARBOX


WEIGHT

PART		WEIGHT(kg)
MOTOR		1.20
GEAR BOX	7GBK3BMH - 7GBK18BMH	0.38
	7GBK20BMH - 7GBK40BMH	0.48
	7GBK50BMH - 7GBK200BMH	0.53

*The output flange and shaft are sold separately.

● 32(42)-Table1

SIZE(mm)	GEAR RATIO
32	7GBK3BMH - 7GBK18BMH
42	7GBK20BMH - 7GBK200BMH

Motor Images

7BDD□-6	7BDG□-6G+7GBK□BMH

Connection Diagrams

Single Phase

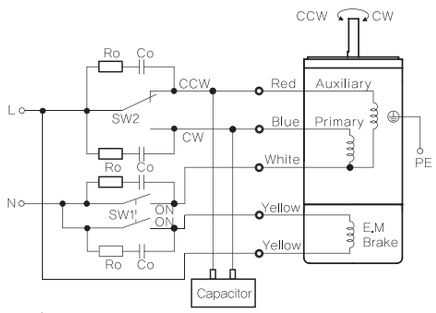

*** Rotation Direction:**
To rotate the motor in a clockwise (CW) direction, turn SW2 to CW.
To rotate the motor in a counterclockwise (CCW) direction, turn SW2 to CCW.

Switch No.	Specifications		Note
	Single Phase 110V/115V Input	Single Phase 220V/230V Input	
SW1	AC 125V 3A minimum (Inductive load)	AC 250V 1.5A minimum (Inductive load)	Switched Simultaneously
SW2			–

1) The direction of motor rotation is as viewed from the shaft end of the motor.
2) CW represents the clockwise direction, while CCW represents the counterclockwise direction.
3) SW1 is for motor operation/stop and electronic brake control. (interlocked)
4) When SW1 is turned On, the brake is released and the motor is rotated. When SW1 is turned OFF, the motor is stopped and the brake is applied.
5) To release the brake with the motor stopped, set SW1 to non-interlocked mode and turn on only the switch on the yellow lead wire side.
6) Ro and Co indicate CR circuit for surge suppression. [Ro=5~200Ω, Co=0.1~0.2μF, 200WV (400WV)]

10W Brake Motor 10W(□70mm)

Motor Specification

Model 7BDG*-10G: Gear Type Shaft 7BDD*-10: D-Cut Type Shaft Lead Wire Type	Output W	Voltage V	Frequency Hz	Poles	Duty	Starting Torque kgfcm	N.m	Rated Load Speed r/min	Current A	Torque kgfcm	N.m	Capacitor μF / VAC
7BD◇1(A)-10□	10	1ø 110	60	4	30min.	0.70	0.070	1550	0.31	0.63	0.063	3.5 / 250
7BD◇B-10□	10	1ø 100	50	4	30min.	0.92	0.092	1200	0.34	0.81	0.081	5.0 / 250
			60			0.91	0.091	1550	0.34	0.63	0.063	
7BD◇C-10□	10	1ø 200	50	4	30min.	0.80	0.080	1250	0.18	0.78	0.078	1.2 / 450
			60			0.78	0.078	1550	0.18	0.63	0.063	
7BD◇2(D)-10□	10	1ø 220	60	4	30min.	0.92	0.092	1550	0.20	0.63	0.063	1.2 / 450
7BD◇E-10□	10	1ø 220	50	4	30min.	0.78	0.078	1200	0.17	0.81	0.081	1.0 / 450
		1ø 240				0.94	0.094		0.18	0.81	0.081	

1) Enter the phase & voltage code in the place * within the motor model name. 2) Enter the output shaft type of motor in the place ◇ (G: Gear Type / D: D-Cut Type). and D-Cut Type Shaft is for using the motor only. 3) If the motor output shaft type is Gear Type, □ contains the model type name of the gearbox being attached. 4) The phase & voltage code A, B, C, D, E contain a built-in thermal protector.

Max. Permissible Torque at Output Shaft of Gearbox

60Hz

Motor Model	Gearbox Model	Gear Ratio	3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90
		r/min	600	500	360	300	240	200	180	144	120	100	90	72	60	50	45	36	30	24	20
7BDG*-10G	7GBK□BMH	kgfcm	1.5	1.8	2.5	3.1	3.8	4.6	5.1	6.4	7.6	9.2	9.2	11.5	13.8	16.5	18.3	20.7	24.9	31.1	37.3
		N.m	0.15	0.18	0.25	0.30	0.37	0.45	0.50	0.62	0.75	0.90	0.90	1.12	1.35	1.62	1.80	2.03	2.44	3.05	3.66

Motor Model	Gearbox Model	Gear Ratio	100	120	150	180	200
		r/min	18	15	12	10	9
7BDG*-10G	7GBK□BMH	kgfcm	41.5	49.8	50.0	50.0	50.0
		N.m	4.06	4.88	4.90	4.90	4.90

50Hz

Motor Model	Gearbox Model	Gear Ratio	3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90
		r/min	500	417	300	250	200	167	150	120	100	83	75	60	50	42	38	30	25	20	17
7BDG*-10G	7GBK□BMH	kgfcm	2.0	2.4	3.3	3.9	4.9	5.9	6.6	8.2	9.9	11.8	11.9	14.8	17.8	21.3	23.7	26.8	32.1	40.2	48.2
		N.m	0.19	0.23	0.32	0.39	0.48	0.58	0.64	0.81	0.97	1.16	1.16	1.45	1.74	2.09	2.32	2.62	3.15	3.94	4.72

Motor Model	Gearbox Model	Gear Ratio	100	120	150	180	200
		r/min	15	12.5	10	8	7.5
7BDG*-10G	7GBK□BMH	kgfcm	50.0	50.0	50.0	50.0	50.0
		N.m	4.90	4.90	4.90	4.90	4.90

1) Enter the phase & voltage code in the place * within the motor model name.
2) Enter the gear ratio in the place of □ within the gearbox model name.
3) A colored background indicates the gear shaft rotation in the same direction as the motor shaft ; a white background indicates the rotation in the opposite direction.
4) The rotating speed is calculated by dividing the motor's synchronous speed (50Hz: 1,500r/min, 60Hz: 1,800r/min) by the gear ratio.
The actual speed is 2~20% less than the displayed value, depending on the size of the load.

Dimensions

MOTOR ONLY

● MOTOR MODEL: 7BD□□-10 (NO FAN)

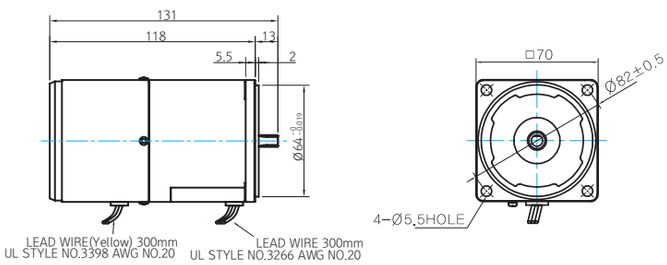

● MOTOR OUTPUT SHAFT

MODEL	SPEC
D-CUT TYPE	
7BDD□-10	

GEARED MOTOR

G TYPE GEARBOX

● MOTOR MODEL:
7BDG□-10G (NO FAN)

● GEARBOX MODEL:
7GBK□BMH

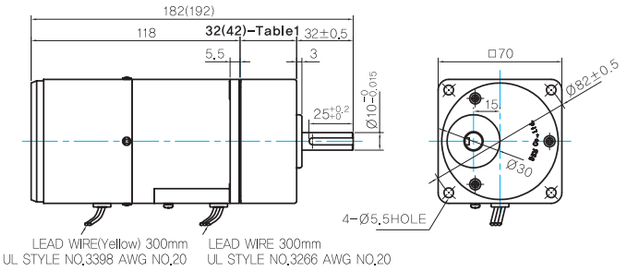

● GEARBOX OUTPUT SHAFT

MODEL	SPEC
KEY TYPE	
7GBK□BMH	

● KEY SPEC



WEIGHT

PART		WEIGHT(kg)
MOTOR		1.20
GEAR BOX	7GBK3BMH - 7GBK18BMH	0.38
	7GBK20BMH - 7GBK40BMH	0.48
	7GBK50BMH - 7GBK200BMH	0.53

*The output flange and shaft are sold separately.

● 32(42)-Table1

SIZE(mm)	GEAR RATIO
32	7GBK3BMH - 7GBK18BMH
42	7GBK20BMH - 7GBK200BMH

Motor Images

7BDD□-10	7BDG□-10G+7GBK□BMH

Connection Diagrams

Single Phase

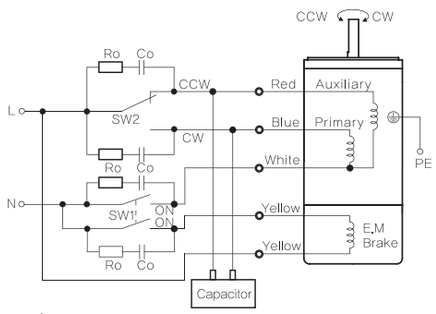

*** Rotation Direction:**
To rotate the motor in a clockwise (CW) direction, turn SW2 to CW.
To rotate the motor in a counterclockwise (CCW) direction, turn SW2 to CCW.

Switch No.	Specifications		Note
	Single Phase 110V/115V Input	Single Phase 220V/230V Input	
SW1	AC 125V 3A minimum (Inductive load)	AC 250V 1.5A minimum (Inductive load)	Switched Simultaneously
SW2			–

1) The direction of motor rotation is as viewed from the shaft end of the motor.
2) CW represents the clockwise direction, while CCW represents the counterclockwise direction.
3) SW1 is for motor operation/stop and electronic brake control. (interlocked)
4) When SW1 is turned On, the brake is released and the motor is rotated. When SW1 is turned OFF, the motor is stopped and the brake is applied.
5) To release the brake with the motor stopped, set SW1 to non-interlocked mode and turn on only the switch on the yellow lead wire side.
6) Ro and Co indicate CR circuit for surge suppression. [Ro=5~200Ω, Co=0.1~0.2μF, 200WV (400WV)]

15W Brake Motor 15W(□70mm)

Motor Specification

Model 7BDG*-15G: Gear Type Shaft 7BDD*-15: D-Cut Type Shaft Lead Wire Type	Output W	Voltage V	Frequency Hz	Poles	Duty	Starting Torque kgfcm	Starting Torque N.m	Rated Load Speed r/min	Rated Load Current A	Rated Load Torque kgfcm	Rated Load Torque N.m	Capacitor μF / VAC
7BD◇1(A)-15□	15	1ø 110	60	4	30min.	1.35	0.135	1550	0.49	0.94	0.094	6.0 / 250
7BD◇B-15□	15	1ø 100	50	4	30min.	1.10	0.110	1250	0.40	1.17	0.117	6.0 / 250
			60			1.08	0.108	1550	0.44	0.94	0.094	
7BD◇C-15□	15	1ø 100	50	4	30min.	1.15	0.115	1250	0.21	1.17	0.117	1.5 / 450
			60			1.10	0.110	1550	0.22	0.94	0.094	
7BD◇2(D)-15□	15	1ø 220	60	4	30min.	1.23	0.123	1600	0.22	0.91	0.091	1.5 / 450
7BD◇E-15□	15	1ø 220	50	4	30min.	1.07	0.107	1200	0.19	1.22	0.122	1.2 / 450
		1ø 240				1.28	0.128		0.21	1.22	0.122	
7BD◇3(G)-15□	15	3ø 220	50	4	Cont.	3.20	0.320	1300	0.27	1.13	0.113	-
			60			2.30	0.230	1550	0.22	0.94	0.094	
		3ø 230	50	4	Cont.	3.60	0.360	1300	0.28	1.13	0.113	
			60			2.50	0.250	1550	0.24	0.94	0.094	

1) Enter the phase & voltage code in the place * within the motor model name.
2) Enter the output shaft type of motor in the place ◇ (G: Gear Type / D: D-Cut Type). and D-Cut Type Shaft is for using the motor only.
3) If the motor output shaft type is Gear Type, □ contains the model type name of the gearbox being attached.
4) The phase & voltage code A, B, C, D, E, G contain a built-in thermal protector.

Max. Permissible Torque at Output Shaft of Gearbox

60Hz

Motor Model	Gearbox Model	Gear Ratio	3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90
		r/min	600	500	360	300	240	200	180	144	120	100	90	72	60	50	45	36	30	24	20
7BDG*-15G	7GBK□BMH	kgfcm	2.2	2.7	3.7	4.4	5.5	6.7	7.4	9.2	11.1	13.3	13.3	16.7	20.0	24.0	26.7	30.1	36.2	45.2	50.0
		N.m	0.22	0.26	0.36	0.43	0.54	0.65	0.72	0.91	1.09	1.30	1.31	1.63	1.96	2.35	2.61	2.95	3.54	4.43	4.90

Motor Model	Gearbox Model	Gear Ratio	100	120	150	180	200
		r/min	18	15	12	10	9
7BDG*-15G	7GBK□BMH	kgfcm	50.0	50.0	50.0	50.0	50.0
		N.m	4.90	4.90	4.90	4.90	4.90

50Hz

Motor Model	Gearbox Model	Gear Ratio	3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90
		r/min	500	417	300	250	200	167	150	120	100	83	75	60	50	42	38	30	25	20	17
7BDG*-15G	7GBK□BMH	kgfcm	3.0	3.6	4.9	5.9	7.4	8.9	9.9	12.3	14.8	17.8	17.8	22.2	26.7	32.0	35.6	40.2	48.2	50.0	50.0
		N.m	0.29	0.35	0.48	0.58	0.72	0.87	0.97	1.21	1.45	1.74	1.74	2.18	2.61	3.14	3.48	3.94	4.72	4.90	4.90

Motor Model	Gearbox Model	Gear Ratio	100	120	150	180	200
		r/min	15	12.5	10	8	7.5
7BDG*-15G	7GBK□BMH	kgfcm	50.0	50.0	50.0	50.0	50.0
		N.m	4.90	4.90	4.90	4.90	4.90

1) Enter the phase & voltage code in the place * within the motor model name.
2) Enter the gear ratio in the place of □ within the gearbox model name.
3) A colored background indicates the gear shaft rotation in the same direction as the motor shaft ; a white background indicates the rotation in the opposite direction.
4) The rotating speed is calculated by dividing the motor's synchronous speed (50Hz: 1,500r/min, 60Hz: 1,800r/min) by the gear ratio.
The actual speed is 2~20% less than the displayed value, depending on the size of the load.

Motor Images

7BDD□-15	7BDG□-15G+7GBK□BMH

Dimensions

MOTOR ONLY

● MOTOR MODEL: 7BD□□-15 (NO FAN)

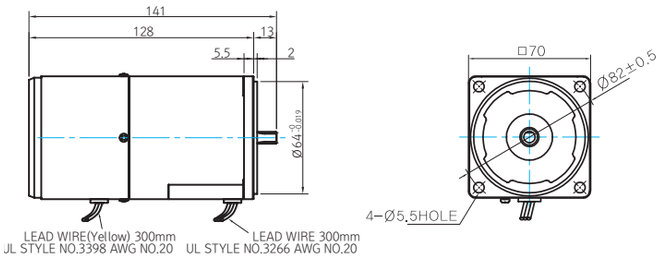

● MOTOR OUTPUT SHAFT

MODEL	SPEC
D-CUT TYPE	
7BDD□-15	

GEARED MOTOR

G TYPE GEARBOX

● MOTOR MODEL:
7BDG□-15G (NO FAN)

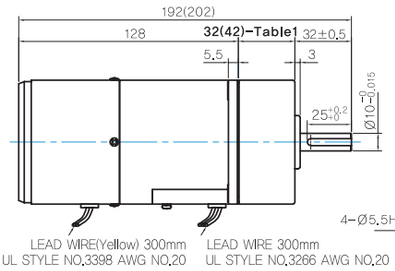

● GEARBOX MODEL:
7GBK□BMH



● GEARBOX OUTPUT SHAFT

MODEL	SPEC
KEY TYPE	
7GBK□BMH	

● KEY SPEC

GEARBOX



WEIGHT

PART		WEIGHT(kg)
MOTOR		1.50
GEAR BOX	7GBK3BMH - 7GBK18BMH	0.38
	7GBK20BMH - 7GBK40BMH	0.48
	7GBK50BMH - 7GBK200BMH	0.53

*The output flange and shaft are sold separately.

● 32(42)-Table1

SIZE(mm)	GEAR RATIO
32	7GBK3BMH – 7GBK18BMH
42	7GBK20BMH – 7GBK200BMH

Connection Diagrams

Single Phase

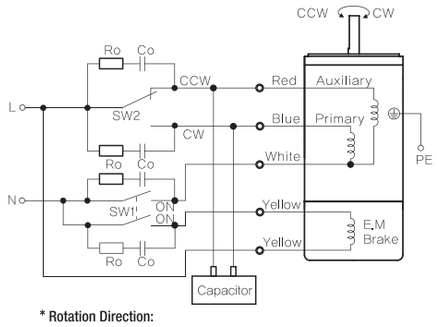

*** Rotation Direction:**
To rotate the motor in a clockwise (CW) direction, turn SW2 to CW.
To rotate the motor in a counterclockwise (CCW) direction, turn SW2 to CCW.

Switch No.	Specifications		Note
	Single Phase 110V/115V Input	Single Phase 220V/230V Input	
SW1	AC 125V 3A minimum (Inductive load)	AC 250V 1.5A minimum (Inductive load)	Switched Simultaneously
SW2			–

Three Phase

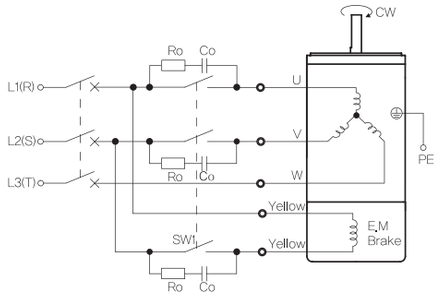

*** CCW Direction:**
Change any two connections between R, S and T.

Switch No.	Specifications	Note
SW1	AC 250V 1.5A minimum (Inductive load)	Switched Simultaneously

INPUT \ LEAD WIRE	U	V	W
3Φ 200V-230V (3, G, J)	WHITE	RED	BLACK
3Φ 380V-400V (4, K)	WHITE	BLUE	BLACK
3Φ 415V-440V (5, L)	WHITE	YELLOW	BLACK

1) SW1 is for motor operation/stop and electronic brake control. (interlocked)
2) When SW1 is turned On, the brake is released and the motor is rotated. When SW1 is turned OFF, the motor is stopped and the brake is applied.
3) To release the brake with the motor stopped, set SW1 to non-interlocked mode and turn on only the switch on the yellow lead wire side.
4) Ro and Co indicate CR circuit for surge suppression. [Ro=5~200Ω, Co=0.1~0.2μF, 200WV (400WV)]
5) When using the inverter, please use the brake power separately. When using the inverter output power, the brake operation power may not be supplied normally depending on the operating frequency.

15W Brake Motor 15W(□ 80mm)

Motor Specification

Model 8BDG*-15□ : Gear Type Shaft 8BDD*-15: D-Cut Type Shaft Lead Wire Type	Output W	Voltage V	Frequency Hz	Poles	Duty	Starting Torque kgfcm	Starting Torque N.m	Rated Load Speed r/min	Rated Load Current A	Rated Load Torque kgfcm	Rated Load Torque N.m	Capacitor μF / VAC
8BD◇1(A)-15□	15	1ø 110	60	4	30min.	1.58	0.158	1600	0.55	0.91	0.091	6.0 / 250
8BD◇B-15□	15	1ø 100	50	4	30min.	1.40	0.140	1350	0.52	1.08	0.108	6.0 / 250
			60			1.30	0.130	1600	0.50	0.91	0.091	
8BD◇C-15□	15	1ø 200	50	4	30min.	1.40	0.140	1350	0.22	1.08	0.108	1.5 / 450
			60			1.35	0.135	1600	0.22	0.91	0.091	
8BD◇2(D)-15□	15	1ø 220	60	4	30min.	1.51	0.151	1600	0.24	0.91	0.091	1.5 / 450
8BD◇E-15□	15	1ø 220	50	4	30min.	1.49	0.149	1300	0.23	1.12	0.112	1.5 / 450
		1ø 240				1.77	0.177		0.25	1.12	0.112	
8BD◇3(G)-15□	15	3ø 220	50	4	Cont.	7.61	0.761	1350	0.29	1.08	0.108	–
			60			6.15	0.615	1600	0.26	0.91	0.091	
		3ø 230	50	4	Cont.	8.25	0.825	1350	0.32	1.08	0.108	
			60			6.72	0.672	1600	0.28	0.91	0.091	
8BD◇J-15□	15	3ø 220	50	4	Cont.	7.50	0.750	1350	0.28	1.08	0.108	–
			60			5.95	0.595	1600	0.25	0.91	0.091	
		3ø 230	50	4	Cont.	7.61	0.761	1350	0.29	1.08	0.108	
			60			6.15	0.615	1600	0.26	0.91	0.091	
8BD◇4(K)-15□	15	3ø 380	50	4	Cont.	5.70	0.570	1350	0.12	1.08	0.108	–
			60			4.53	0.453	1600	0.11	0.91	0.091	
		3ø 400	50	4	Cont.	6.26	0.626	1350	0.13	1.08	0.108	
			60			5.03	0.503	1600	0.12	0.91	0.091	
8BD◇5(L)-15□	15	3ø 415	50	4	Cont.	6.68	0.668	1350	0.14	1.08	0.108	–
			60			5.40	0.540	1600	0.12	0.91	0.091	
		3ø 440	50	4	Cont.	7.39	0.739	1350	0.15	1.08	0.108	
			60			6.02	0.602	1600	0.13	0.91	0.091	

1) Enter the phase & voltage code in the place * within the motor model name. 2) Enter the output shaft type of motor in the place ◇ (G: Gear Type / D: D-Cut Type / K: Key Type) and D-Cut Type / Key Type Shaft are for using the motor only. 3) If the motor output shaft type is Gear Type, □ contains the model type name of the gearbox being attached.
4) The phase & voltage code A, B, C, D, E, G, J, K, L contain a built-in thermal protector.
5) It is not possible to use an inverter for three phase 380~440V motor. When the inverter is used, the insulation of winding coil becomes hot and may cause damage to the motor.

Max. Permissible Torque at Output Shaft of Gearbox

60Hz

Motor Model	Gearbox Model	Gear Ratio	3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120
		r/min	600	500	360	300	240	200	180	144	120	100	90	72	60	50	45	36	30	24	20	18	15
8BDG*-15G	8GBK□BMH	kgfcm	2.2	2.7	3.7	4.4	5.5	6.7	7.4	9.2	11.1	13.3	13.3	16.7	20.0	24.0	26.7	30.1	36.2	45.2	54.2	60.3	72.3
		N.m	0.22	0.26	0.36	0.43	0.54	0.65	0.72	0.91	1.09	1.30	1.31	1.63	1.96	2.35	2.61	2.95	3.54	4.43	5.32	5.91	7.09

Motor Model	Gearbox Model	Gear Ratio	150	180	200	250	300	360
		r/min	12	10	9	7	6	5
8BDG*-15G	8GBK□BMH	kgfcm	80.0	80.0	80.0	80.0	80.0	80.0
		N.m	7.84	7.84	7.84	7.84	7.84	7.84

Motor Model	Gearbox Model	Gear Ratio	10	12	15	18	25	30	36	50	60
		r/min	180	150	120	100	72	60	50	36	30
8BDG*-15W	8WD□BL/□BR/□BRL	kgfcm	7.5	8.8	10.5	12.2	16.0	18.1	21.0	27.4	30.1
		N.m	0.73	0.86	1.03	1.19	1.57	1.77	2.06	2.68	2.95

50Hz

Motor Model	Gearbox Model	Gear Ratio	3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120
		r/min	500	417	300	250	200	167	150	120	100	83	75	60	50	42	37.5	30	25	20	17	15	12.5
8BDG*-15G	8GBK□BMH	kgfcm	2.6	3.2	4.4	5.3	6.6	7.9	8.8	11.0	13.1	15.8	15.8	19.8	23.7	28.4	31.6	35.7	42.9	53.6	64.3	71.4	80.0
		N.m	0.26	0.31	0.43	0.52	0.64	0.77	0.86	1.07	1.29	1.55	1.55	1.94	2.32	2.79	3.10	3.50	4.20	5.25	6.30	7.00	7.84

Motor Model	Gearbox Model	Gear Ratio	150	180	200	250	300	360
		r/min	10	8	7.5	6	5	4
8BDG*-15G	8GBK□BMH	kgfcm	80.0	80.0	80.0	80.0	80.0	80.0
		N.m	7.84	7.84	7.84	7.84	7.84	7.84

Motor Model	Gearbox Model	Gear Ratio	10	12	15	18	25	30	36	50	60
		r/min	150	125	100	83	60	50	42	30	25
8BDG*-15W	8WD□BL/□BR/□BRL	kgfcm	8.9	10.4	12.5	14.4	18.9	21.4	24.9	32.5	35.7
		N.m	0.87	1.02	1.22	1.41	1.86	2.10	2.44	3.18	3.50

1) Enter the phase & voltage code in the place * within the motor model name. 2) Enter the gear ratio in the place of □ within the gearbox model name. 3) A colored background indicates the gear shaft rotation in the same direction as the motor shaft ; a white background indicates the rotation in the opposite direction. 4) The rotating speed is calculated by dividing the motor's synchronous speed (50Hz: 1,500r/min, 60Hz: 1,800r/min) by the gear ratio. The actual speed is 2~20% less than the displayed value, depending on the size of the load.

Dimensions

MOTOR ONLY

● MOTOR MODEL: 8BD□□-15 (NO FAN)

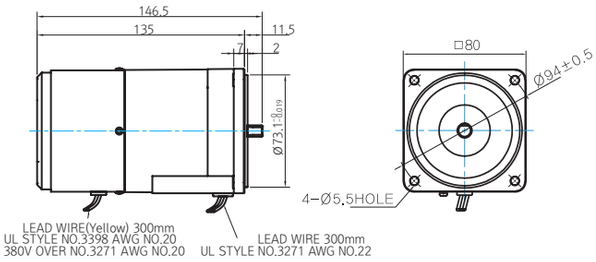

● MOTOR OUTPUT SHAFT

MODEL	SPEC
D-CUT TYPE	
8BDD□-15	

INTER-DECIMAL GEARBOX

● MODEL: 8XD10□□



GEARED MOTOR

G TYPE GEARBOX

● MOTOR MODEL:
8BDG□-15G (NO FAN)

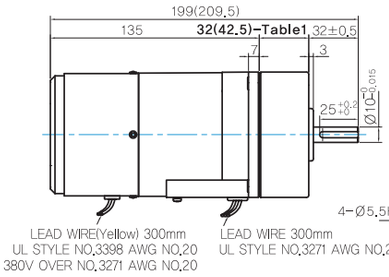

● GEARBOX MODEL:
8GBK□BMH



● GEARBOX OUTPUT SHAFT

MODEL	SPEC
KEY TYPE	
8GBK□BMH	

● KEY SPEC

GEARBOX



● 32(42.5)-Table1

SIZE(mm)	GEAR RATIO
32	8GBK3BMH – 8GBK18BMH
42.5	8GBK20BMH – 8GBK360BMH

W TYPE GEARBOX

● MOTOR MODEL:
8BDG□-15W (NO FAN)

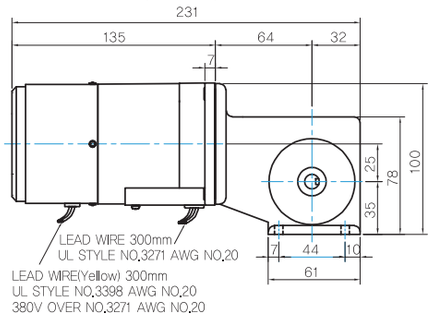

● GEARBOX MODEL:
8WD□BL/BR/BRL



● KEY SPEC

GEARBOX



WEIGHT

PART		WEIGHT(kg)
MOTOR		2.00
GEAR BOX	8GBK3BMH – 8GBK18BMH	0.56
	8GBK20BMH – 8GBK40BMH	0.65
	8GBK50BMH – 8GBK360BMH	0.72
	8WD□BL/BR/BRL	0.68
	8XD10○○	0.45

*The output flange and shaft are sold separately.

Motor Images

8BDD□-15	8BDG□-15G+8GBK□BMH	8BDG□-15W+8WD□BL

Brake Motor 15W (□80mm)

Connection Diagrams

Single Phase

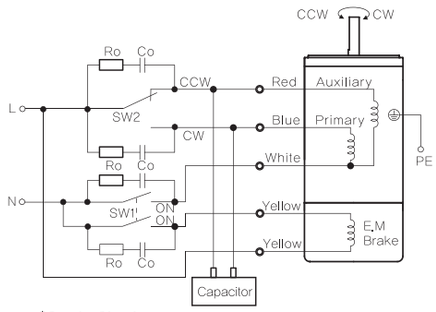

*** Rotation Direction:**
To rotate the motor in a clockwise (CW) direction, turn SW2 to CW.
To rotate the motor in a counterclockwise (CCW) direction, turn SW2 to CCW.

Switch No.	Specifications		Note
	Single Phase 110V/115V Input	Single Phase 220V/230V Input	
SW1	AC 125V 3A minimum (Inductive load)	AC 250V 1.5A minimum (Inductive load)	Switched Simultaneously
SW2			–

Three Phase

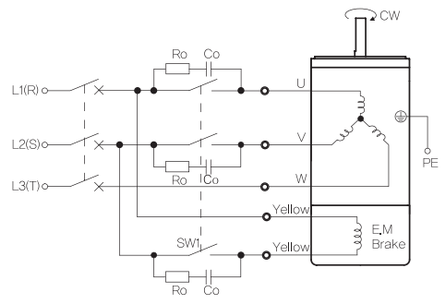

*** CCW Direction:**
Change any two connections between R, S and T.

Switch No.	Specifications	Note
SW1	AC 250V 1.5A minimum (Inductive load)	Switched Simultaneously

INPUT \ LEAD WIRE	U	V	W
3Φ 200V-230V (3, G, J)	WHITE	RED	BLACK
3Φ 380V-400V (4, K)	WHITE	BLUE	BLACK
3Φ 415V-440V (5, L)	WHITE	YELLOW	BLACK

1) SW1 is for motor operation/stop and electronic brake control. (interlocked)
2) When SW1 is turned On, the brake is released and the motor is rotated. When SW1 is turned OFF, the motor is stopped and the brake is applied.
3) To release the brake with the motor stopped, set SW1 to non-interlocked mode and turn on only the switch on the yellow lead wire side.
4) Ro and Co indicate CR circuit for surge suppression. [Ro=5~200Ω, Co=0.1~0.2μF, 200WV (400WV)]
5) When using the inverter, please use the brake power separately. When using the inverter output power, the brake operation power may not be supplied normally depending on the operating frequency.

25W Brake Motor 25W(□ 80mm)

Motor Specification

Model 8BDG*-25□ : Gear Type Shaft 8BDD*-25: D-Cut Type Shaft Lead Wire Type	Output W	Voltage V	Frequency Hz	Poles	Duty	Starting Torque kgfcm	Starting Torque N.m	Rated Load Speed r/min	Rated Load Current A	Rated Load Torque kgfcm	Rated Load Torque N.m	Capacitor μF / VAC
8BD◇1(A)-25□	25	1ø 110	60	4	30min.	2.40	0.240	1600	0.74	1.52	0.152	10.0 / 250
8BD◇B-25□	25	1ø 200	50	4	30min.	2.30	0.230	1300	0.62	1.87	0.187	10.0 / 250
			60			2.25	0.225	1600	0.68	1.52	0.152	
8BD◇C-25□	25	1ø 200	50	4	30min.	2.30	0.230	1300	0.29	1.87	0.187	2.5 / 450
			60			2.25	0.225	1600	0.33	1.52	0.152	
8BD◇2(D)-25□	25	1ø 220	60	4	30min.	2.47	0.247	1600	0.35	1.52	0.152	2.5 / 450
8BD◇E-25□	25	1ø 220	50	4	30min.	1.97	0.197	1250	0.28	1.95	0.195	2.0 / 450
		1ø 240				2.49	0.249		0.31	1.95	0.195	
8BD◇3(G)-25□	25	3ø 220	50	4	Cont.	7.61	0.761	1350	0.29	1.80	0.180	-
			60			6.15	0.615	1600	0.26	1.52	0.152	
		3ø 230	50	4	Cont.	8.25	0.825	1350	0.32	1.80	0.180	
			60			6.72	0.672	1600	0.28	1.52	0.152	
8BD◇J-25□	25	3ø 220	50	4	Cont.	7.50	0.750	1300	0.30	1.87	0.187	-
			60			5.95	0.595	1550	0.27	1.57	0.157	
		3ø 230	50	4	Cont.	7.61	0.761	1350	0.29	1.80	0.180	
			60			6.15	0.615	1600	0.26	1.52	0.152	
8BD◇4(K)-25□	25	3ø 380	50	4	Cont.	5.70	0.570	1300	0.13	1.87	0.187	-
			60			4.53	0.453	1550	0.12	1.57	0.157	
		3ø 400	50	4	Cont.	6.26	0.626	1300	0.14	1.87	0.187	
			60			5.03	0.503	1550	0.13	1.57	0.157	
8BD◇5(L)-25□	25	3ø 415	50	4	Cont.	6.68	0.668	1300	0.15	1.87	0.187	-
			60			5.40	0.540	1550	0.13	1.57	0.157	
		3ø 440	50	4	Cont.	7.39	0.739	1300	0.16	1.87	0.187	
			60			6.02	0.602	1550	0.14	1.57	0.157	

1) Enter the phase & voltage code in the place * within the motor model name. 2) Enter the output shaft type of motor in the place ◇ (G: Gear Type / D: D-Cut Type / K: Key Type) and D-Cut Type / Key Type Shaft are for using the motor only. 3) If the motor output shaft type is Gear Type, □ contains the model type name of the gearbox being attached. 4) The phase & voltage code A, B, C, D, E, G, J, K, L contain a built-in thermal protector. 5) It is not possible to use an inverter for three phase 380~440V motor. When the inverter is used, the insulation of winding coil becomes hot and may cause damage to the motor.

Max. Permissible Torque at Output Shaft of Gearbox

60Hz

Motor Model	Gearbox Model	Gear Ratio	3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120
		r/min	600	500	360	300	240	200	180	144	120	100	90	72	60	50	45	36	30	24	20	18	15
8BDG*-25G	8GBK□BMH	kgfcm	3.7	4.4	6.2	7.4	9.2	11.1	12.3	15.4	18.5	22.2	22.2	27.8	33.3	40.0	44.4	50.2	60.3	75.3	80.0	80.0	80.0
		N.m	0.36	0.43	0.60	0.72	0.91	1.09	1.21	1.51	1.81	2.17	2.18	2.72	3.27	3.92	4.35	4.92	5.91	7.38	7.84	7.84	7.84

Motor Model	Gearbox Model	Gear Ratio	150	180	200	250	300	360
		r/min	12	10	9	7	6	5
8BDG*-25G	8GBK□BMH	kgfcm	80.0	80.0	80.0	80.0	80.0	80.0
		N.m	7.84	7.84	7.84	7.84	7.84	7.84

Motor Model	Gearbox Model	Gear Ratio	10	12	15	18	25	30	36	50	60
		r/min	180	150	120	100	72	60	50	36	30
8BDG*-25W	8WD□BL/□BR/□BRL	kgfcm	12.5	14.6	17.6	20.3	26.6	30.1	35.1	45.7	50.2
		N.m	1.22	1.43	1.72	1.99	2.61	2.95	3.44	4.47	4.92

50Hz

Motor Model	Gearbox Model	Gear Ratio	3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120
		r/min	500	417	300	250	200	167	150	120	100	83	75	60	50	42	37.5	30	25	20	17	15	12.5
8BDG*-25G	8GBK□BMH	kgfcm	4.4	5.3	7.3	8.8	11.0	13.1	14.6	18.3	21.9	26.3	26.3	32.9	39.5	47.4	52.7	59.5	71.4	80.0	80.0	80.0	80.0
		N.m	0.43	0.52	0.72	0.86	1.07	1.29	1.43	1.79	2.15	2.58	2.58	3.23	3.87	4.65	5.16	5.83	7.00	7.84	7.84	7.84	7.84

Motor Model	Gearbox Model	Gear Ratio	150	180	200	250	300	360
		r/min	10	8	7.5	6	5	4
8BDG*-25G	8GBK□BMH	kgfcm	80.0	80.0	80.0	80.0	80.0	80.0
		N.m	7.84	7.84	7.84	7.84	7.84	7.84

Motor Model	Gearbox Model	Gear Ratio	10	12	15	18	25	30	36	50	60
		r/min	150	125	100	83	60	50	42	30	25
8BDG*-25W	8WD□BL/□BR/□BRL	kgfcm	14.8	17.3	20.8	24.0	31.6	35.7	41.6	54.1	59.5
		N.m	1.45	1.70	2.04	2.35	3.09	3.50	4.07	5.30	5.83

1) Enter the phase & voltage code in the place * within the motor model name. 2) Enter the gear ratio in the place of □ within the gearbox model name. 3) A colored background indicates the gear shaft rotation in the same direction as the motor shaft ; a white background indicates the rotation in the opposite direction. 4) The rotating speed is calculated by dividing the motor's synchronous speed (50Hz: 1,500r/min, 60Hz: 1,800r/min) by the gear ratio.
The actual speed is 2~20% less than the displayed value, depending on the size of the load.

B AC Motors

Brake Motor 25W (□80mm)

Dimensions

MOTOR ONLY

● MOTOR MODEL: 8BD□□-25 (NO FAN)

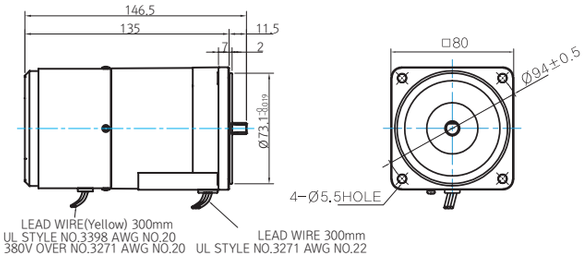

● MOTOR OUTPUT SHAFT

MODEL	SPEC
D-CUT TYPE	
8BDD□-25	

INTER-DECIMAL GEARBOX

● MODEL: 8XD10□□



GEARED MOTOR

G TYPE GEARBOX

● MOTOR MODEL:
8BDG□-25G (NO FAN)

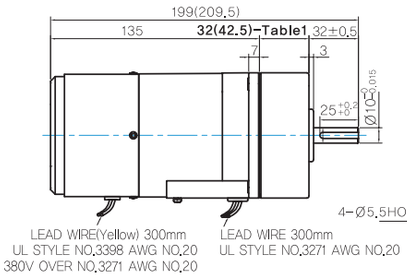

● GEARBOX MODEL:
8GBK□BMH



● GEARBOX OUTPUT SHAFT

MODEL	SPEC
KEY TYPE	
8GBK□BMH	

● 32(42.5)-Table1

SIZE(mm)	GEAR RATIO
32	8GBK3BMH – 8GBK18BMH
42.5	8GBK20BMH – 8GBK360BMH

● KEY SPEC

GEARBOX



W TYPE GEARBOX

● MOTOR MODEL:
8BDG□-25W (NO FAN)

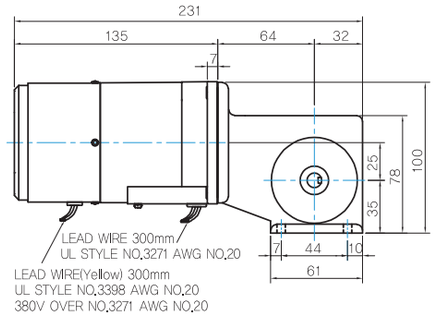

● GEARBOX MODEL:
8WD□BL/BR/BRL



● KEY SPEC

GEARBOX



WEIGHT

PART		WEIGHT(kg)
MOTOR		2.00
GEAR BOX	8GBK3BMH - 8GBK18BMH	0.56
	8GBK20BMH - 8GBK40BMH	0.65
	8GBK50BMH - 8GBK360BMH	0.72
	8WD□BL/BR/BRL	0.68
	8XD10○○	0.45

*The output flange and shaft are sold separately.

Motor Images

8BDD□-25	8BDG□-25G+8GBK□BMH	8BDG□-25W+8WD□BL

Connection Diagrams

Single Phase

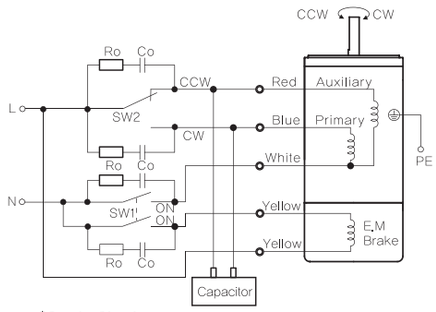

*** Rotation Direction:**
To rotate the motor in a clockwise (CW) direction, turn SW2 to CW.
To rotate the motor in a counterclockwise (CCW) direction, turn SW2 to CCW.

Switch No.	Specifications		Note
	Single Phase 110V/115V Input	Single Phase 220V/230V Input	
SW1	AC 125V 3A minimum (Inductive load)	AC 250V 1.5A minimum (Inductive load)	Switched Simultaneously
SW2			–

Three Phase

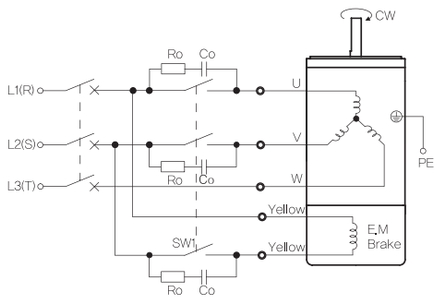

*** CCW Direction:**
Change any two connections between R, S and T.

Switch No.	Specifications	Note
SW1	AC 250V 1.5A minimum (Inductive load)	Switched Simultaneously

LEAD WIRE / INPUT	U	V	W
3Φ 200V~230V (3, G, J)	WHITE	RED	BLACK
3Φ 380V~400V (4, K)	WHITE	BLUE	BLACK
3Φ 415V~440V (5, L)	WHITE	YELLOW	BLACK

1) SW1 is for motor operation/stop and electronic brake control. (interlocked)
2) When SW1 is turned On, the brake is released and the motor is rotated. When SW1 is turned OFF, the motor is stopped and the brake is applied.
3) To release the brake with the motor stopped, set SW1 to non-interlocked mode and turn on only the switch on the yellow lead wire side.
4) Ro and Co indicate CR circuit for surge suppression. [Ro=5~200Ω, Co=0.1~0.2㎌, 200WV (400WV)]
5) When using the inverter, please use the brake power separately. When using the inverter output power, the brake operation power may not be supplied normally depending on the operating frequency.

Brake Motor 40W (□ 90mm)

40W Brake Motor 40W(□ 90mm)

Motor Specification

Model 9BDG*-40□ : Gear Type Shaft 9BDD*-40: D-Cut Type Shaft 9BDK*-40: Key Type Shaft Lead Wire Type	Output W	Voltage V	Frequency Hz	Poles	Duty	Starting Torque kgfcm	Starting Torque N.m	Rated Load Speed r/min	Rated Load Current A	Rated Load Torque kgfcm	Rated Load Torque N.m	Capacitor μF / VAC
9BD◇1(A)-40□	40	1ø 110	60	4	30min.	4.00	0.400	1600	1.25	2.44	0.244	16.0 / 250
9BD◇B-40□	40	1ø 100	50	4	30min.	3.55	0.355	1300	0.95	3.00	0.300	16.0 / 250
			60			3.55	0.355	1600	1.15	2.44	0.244	
9BD◇C-40□	40	1ø 200	50	4	30min.	3.70	0.370	1300	0.51	3.00	0.300	4.0 / 450
			60			3.50	0.350	1600	0.53	2.44	0.244	
9BD◇2(D)-40□	40	1ø 220	60	4	30min.	4.00	0.400	1600	0.61	2.44	0.244	4.0 / 450
9BD◇E-40□	40	1ø 220	50	4	30min.	3.20	0.320	1350	0.36	2.89	0.289	3.0 / 450
		1ø 240				3.91	0.391		0.39	2.89	0.289	
9BD◇3(G)-40□	40	3ø 220	50	4	Cont.	9.90	0.990	1350	0.33	2.89	0.289	–
			60			7.90	0.790	1600	0.31	2.44	0.244	
		3ø 230	50	4	Cont.	10.80	1.080	1350	0.35	2.89	0.289	
			60			8.50	0.850	1600	0.33	2.44	0.244	
9BD◇J-40□	40	3ø 200	50	4	Cont.	9.60	0.960	1300	0.34	3.00	0.300	–
			60			7.40	0.740	1550	0.31	2.52	0.252	
		3ø 220	50	4	Cont.	9.90	0.990	1350	0.33	2.89	0.289	
			60			7.90	0.790	1600	0.31	2.44	0.244	
9BD◇4(K)-40□	40	3ø 380	50	4	Cont.	10.20	1.020	1350	0.19	2.89	0.289	–
			60			8.00	0.800	1600	0.18	2.44	0.244	
		3ø 400	50	4	Cont.	11.10	1.110	1350	0.20	2.89	0.289	
			60			8.80	0.880	1600	0.19	2.44	0.244	
9BD◇5(L)-40□	40	3ø 415	50	4	Cont.	10.00	1.000	1350	0.17	2.89	0.289	–
			60			8.00	0.800	1600	0.16	2.44	0.244	
		3ø 440	50	4	Cont.	11.10	1.110	1350	0.18	2.89	0.289	
			60			8.90	0.890	1600	0.17	2.44	0.244	

1) Enter the phase & voltage code in the place * within the motor model name. 2) Enter the output shaft type of motor in the place ◇ (G: Gear Type / D: D-Cut Type / K: Key Type) and D-Cut Type / Key Type Shaft are for using the motor only. 3) If the motor output shaft type is Gear Type, □ contains the model type name of the gearbox being attached. 4) The phase & voltage code A, B, C, D, E, G, J, K, L contain a built-in thermal protector. 5) It is not possible to use an inverter for three phase 380~440V motor. When the inverter is used, the insulation of winding coil becomes hot and may cause damage to the motor.

Max. Permissible Torque at Output Shaft of Gearbox

60Hz

Motor Model	Gearbox Model	Gear Ratio	2	3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100
		r/min	900	600	500	360	300	240	200	180	144	120	100	90	72	60	50	45	36	30	24	20	18
9BDG*-40G	9GBK□BMH	kgfcm	3.9	5.9	7.1	9.9	11.8	14.8	17.8	19.7	24.7	29.6	35.5	35.6	44.4	53.3	64.0	71.1	80.4	96.4	100.0	100.0	100.0
		N.m	0.39	0.58	0.70	0.97	1.16	1.45	1.74	1.93	2.42	2.90	3.48	3.48	4.35	5.23	6.27	6.97	7.87	9.45	9.80	9.80	9.80

Motor Model	Gearbox Model	Gear Ratio	120	150	180	200
		r/min	15	12	10	9
9BDG*-40G	9GBK□BMH	kgfcm	100.0	100.0	100.0	100.0
		N.m	9.80	9.80	9.80	9.80

Motor Model	Gearbox Model	Gear Ratio	10	12	15	18	25	30	36	50	60
		r/min	180	150	120	100	72	60	50	36	30
9BDG*-40W	9WD□BL/□BR/□BRL	kgfcm	20.0	23.4	28.1	32.4	42.6	48.2	56.1	73.1	80.4
		N.m	1.96	2.29	2.76	3.18	4.18	4.72	5.50	7.16	7.87

Motor Model	Gearbox Model	Gear Ratio	2	3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120	150	180	200
		r/min	900	600	500	360	300	240	200	180	144	120	100	90	72	60	50	45	36	30	24	20	18	15	12	10	9
9BDG*-40P	9PBK□BH 9PFK□BH	kgfcm	3.9	5.9	7.1	9.9	11.8	14.8	17.8	19.7	22.2	26.7	32.0	35.6	40.2	48.2	57.9	64.3	80.4	96.4	107.7	129.3	143.7	172.4	200.0	200.0	200.0
		N.m	0.39	0.58	0.70	0.97	1.16	1.45	1.74	1.93	2.18	2.61	3.14	3.48	3.94	4.72	5.67	6.30	7.87	9.45	10.56	12.67	14.08	16.90	19.60	19.60	19.60

50Hz

Motor Model	Gearbox Model	Gear Ratio	2	3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100
		r/min	750.0	500.0	417.0	300.0	250.0	200.0	167.0	150.0	120.0	100.0	83.0	75.0	60.0	50.0	42.0	38.0	30.0	25.0	20.0	17.0	15.0
9BDG*-40G	9GBK□BMH	kgfcm	4.7	7.0	8.4	11.7	14.0	17.5	21.0	23.4	29.2	35.1	42.1	42.1	52.7	63.2	75.8	84.3	95.2	100.0	100.0	100.0	100.0
		N.m	0.46	0.69	0.82	1.15	1.37	1.72	2.06	2.29	2.86	3.44	4.12	4.13	5.16	6.19	7.43	8.26	9.33	9.80	9.80	9.80	9.80

Motor Model	Gearbox Model	Gear Ratio	120	150	180	200
		r/min	13.0	10.0	8.0	7
9BDG*-40G	9GBK□BMH	kgfcm	100.0	100.0	100.0	100.0
		N.m	9.80	9.80	9.80	9.80

Motor Model	Gearbox Model	Gear Ratio	10	12	15	18	25	30	36	50	60
		r/min	150	125	100	83	60	50	42	30	25
9BDG*-40W	9WD□BL/□BR/□BRL	kgfcm	23.7	27.7	33.3	38.4	50.5	57.1	66.5	86.6	95.2
		N.m	2.32	2.72	3.27	3.77	4.95	5.60	6.52	8.48	9.33

Motor Model	Gearbox Model	Gear Ratio	2	3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120	150	180	200
		r/min	750	500	417	300	250	200	167	150	120	100	83	75	60	50	42	37.5	30	25	20	17	15	12.5	10	8	7.5
9BDG*-40P	9PBK□BH 9PFK□BH	kgfcm	4.7	7.0	8.4	11.7	14.0	17.5	21.0	23.4	26.3	31.6	37.9	42.1	47.6	57.1	68.6	76.2	95.2	114.3	127.7	153.2	170.3	200.0	200.0	200.0	200.0
		N.m	0.46	0.69	0.82	1.15	1.37	1.72	2.06	2.29	2.58	3.10	3.72	4.13	4.67	5.60	6.72	7.47	9.33	11.20	12.51	15.02	16.69	19.60	19.60	19.60	19.60

1) Enter the phase & voltage code in the place * within the motor model name. 2) Enter the gear ratio in the place of □ within the gearbox model name. 3) A colored background indicates the gear shaft rotation in the same direction as the motor shaft ; a white background indicates the rotation in the opposite direction. 4) The rotating speed is calculated by dividing the motor's synchronous speed (50Hz: 1,500r/min, 60Hz: 1,800r/min) by the gear ratio. The actual speed is 2~20% less than the displayed value, depending on the size of the load.

Dimensions

MOTOR ONLY

● MOTOR MODEL: 9BD□□-40 (NO FAN)

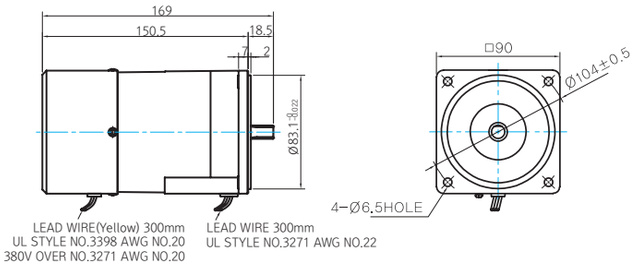

● MOTOR OUTPUT SHAFT

MODEL	SPEC
D-CUT TYPE	
9BDD□-40	
KEY TYPE	
9BDK□-40	



● KEY SPEC



INTER-DECIMAL GEARBOX

● MODEL: 9XD10□□



GEARED MOTOR

G TYPE GEARBOX

● MOTOR MODEL: 9BDG□-40G (NO FAN)

● GEARBOX MODEL: 9GBK□BMH

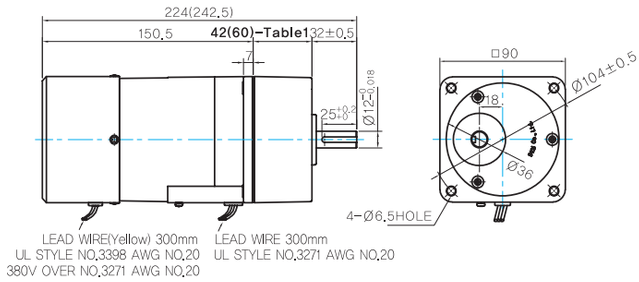

● GEARBOX OUTPUT SHAFT

MODEL	SPEC
KEY TYPE	
9GBK□BMH	



● KEY SPEC



● 42(60)-Table1

SIZE(mm)	GEAR RATIO
42	9GBK2BMH – 9GBK18BMH
60	9GBK20BMH – 9GBK200BMH

P TYPE GEARBOX

● MOTOR MODEL: 9BDG□-40P (NO FAN)

● GEARBOX MODEL: 9PBK□BH

● GEARBOX MODEL: 9PFK□BH

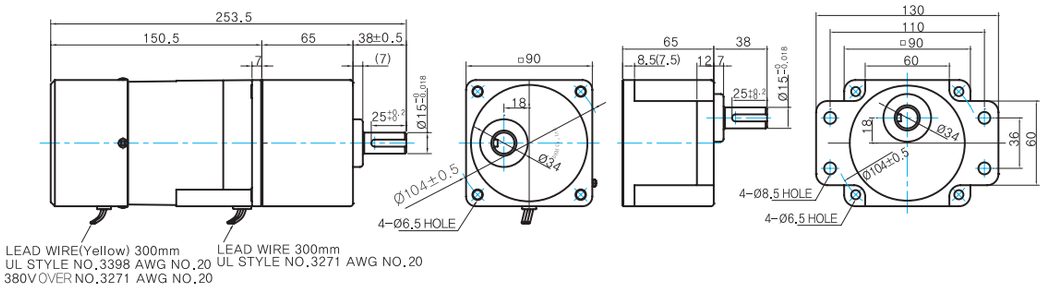

● GEARBOX OUTPUT SHAFT

MODEL	SPEC
KEY TYPE	
9PBK□BH 9PFK□BH	



● KEY SPEC



W TYPE GEARBOX

● MOTOR MODEL: 9BDG□-40W (NO FAN)

● GEARBOX MODEL: 9WD□BL/BR/BRL

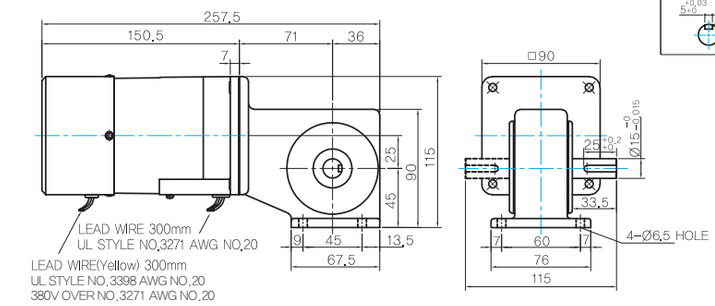

● KEY SPEC



WEIGHT

PART		WEIGHT(kg)
MOTOR		3.00
GEAR BOX	9GBK2BMH – 9GBK18BMH	0.78
	9GBK20BMH – 9GBK40BMH	1.10
	9GBK50BMH – 9GBK200BMH	1.20
	9PB(F)K2BH – 9PB(F)K10BH	1.28
	9PB(F)K12.5BH – 9PB(F)K20BH	1.30
	9PB(F)K25BH – 9PB(F)K60BH	1.45
	9PB(F)K75BH – 9PB(F)K200BH	1.47
	9WD□BL/BR/BRL	1.00
	9XD10○○	0.60

*The output flange and shaft are sold separately.

Brake Motor 40W (□ 90mm)

Motor Images

9BDD□-40	9BDG□-40G+9GBK□BMH	9BDG□-40P+9PBK□BH	9BDG□-40W+9WD□BL

Connection Diagrams

Single Phase

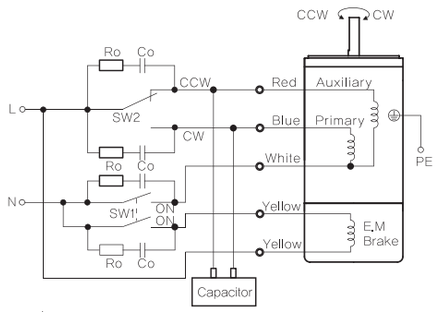

*** Rotation Direction:**
To rotate the motor in a clockwise (CW) direction, turn SW2 to CW.
To rotate the motor in a counterclockwise (CCW) direction, turn SW2 to CCW.

Switch No.	Specifications		Note
	Single Phase 110V/115V Input	Single Phase 220V/230V Input	
SW1	AC 125V 3A minimum (Inductive load)	AC 250V 1.5A minimum (Inductive load)	Switched Simultaneously
SW2			–

Three Phase

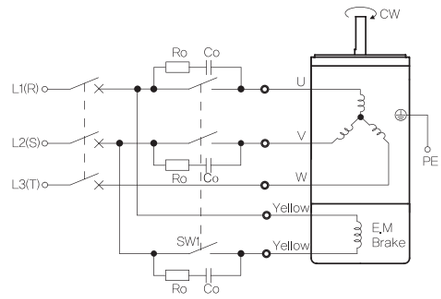

*** CCW Direction:**
Change any two connections between R, S and T.

Switch No.	Specifications	Note
SW1	AC 250V 1.5A minimum (Inductive load)	Switched Simultaneously

INPUT \ LEAD WIRE	U	V	W
3Φ 200V~230V (3, G, J)	WHITE	RED	BLACK
3Φ 380V~400V (4, K)	WHITE	BLUE	BLACK
3Φ 415V~440V (5, L)	WHITE	YELLOW	BLACK

1) SW1 is for motor operation/stop and electronic brake control. (interlocked)
2) When SW1 is turned On, the brake is released and the motor is rotated. When SW1 is turned OFF, the motor is stopped and the brake is applied.
3) To release the brake with the motor stopped, set SW1 to non-interlocked mode and turn on only the switch on the yellow lead wire side.
4) Ro and Co indicate CR circuit for surge suppression. [Ro=5~200Ω, Co=0.1~0.2㎌, 200WV (400WV)]
5) When using the inverter, please use the brake power separately. When using the inverter output power, the brake operation power may not be supplied normally depending on the operating frequency.

60W Brake Motor 60W(□ 90mm)

Motor Specification

Model 9BDG*-60F□(-T): Gear Type Shaft 9BDD*-60F(-T): D-Cut Type Shaft 9BDK*-60F(-T): Key Type Shaft Lead Wire Type	Output W	Voltage V	Frequency Hz	Poles	Duty	Starting Torque kgfcm	Starting Torque N.m	Rated Load Speed r/min	Rated Load Current A	Rated Load Torque kgfcm	Rated Load Torque N.m	Capacitor μF / VAC
9BD◇1(A)-60F□	60	1ø 110	60	4	30min.	5.20	0.520	1600	1.60	3.65	0.365	20.0 / 250
9BD◇B-60F□	60	1ø 100	50	4	30min.	6.20	0.620	1300	1.60	4.50	0.450	25.0 / 250
			60			6.00	0.600	1600	1.70	3.65	0.365	
9BD◇C-60F□	60	1ø 200	50	4	30min.	5.70	0.570	1300	0.76	4.50	0.450	6.0 / 450
			60			5.50	0.550	1600	0.79	3.65	0.365	
9BD◇2(D)-60F□	60	1ø 220	60	4	30min.	5.19	0.519	1600	0.75	3.65	0.365	5.0 / 450
9BD◇E-60F□	60	1ø 220	50	4	30min.	5.52	0.552	1300	0.59	4.50	0.450	5.0 / 450
		1ø 240				6.52	0.652		0.64	4.50	0.450	
9BD◇3(G)-60F□	60	3ø 220	50	4	Cont.	17.20	1.720	1350	0.59	4.33	0.433	-
			60			13.80	1.380	1600	0.53	3.65	0.365	
		3ø 230	50	4	Cont.	18.80	1.880	1350	0.62	4.33	0.433	
			60			15.00	1.500	1600	0.56	3.65	0.365	
9BD◇J-60F□	60	3ø 200	50	4	Cont.	16.50	1.650	1300	0.57	4.50	0.450	-
			60			13.00	1.300	1550	0.52	3.77	0.377	
		3ø 220	50	4	Cont.	17.20	1.720	1350	0.59	4.33	0.433	
			60			13.80	1.380	1600	0.53	3.65	0.365	
9BD◇4(K)-60F□	60	3ø 380	50	4	Cont.	16.70	1.670	1350	0.31	4.33	0.433	-
			60			13.40	1.340	1600	0.28	3.65	0.365	
		3ø 400	50	4	Cont.	18.30	1.830	1350	0.34	4.33	0.433	
			60			14.70	1.470	1600	0.30	3.65	0.365	
9BD◇5(L)-60F□	60	3ø 415	50	4	Cont.	16.70	1.670	1350	0.29	4.33	0.433	-
			60			13.40	1.340	1600	0.26	3.65	0.365	
		3ø 440	50	4	Cont.	18.50	1.850	1350	0.31	4.33	0.433	
			60			15.00	1.500	1600	0.28	3.65	0.365	

1) Enter the phase & voltage code in the place * within the motor model name. 2) Enter the output shaft type of motor in the place ◇ (G: Gear Type / D: D-Cut Type / K: Key Type) and D-Cut Type / Key Type Shaft are for using the motor only. 3) If the motor output shaft type is Gear Type, □ contains the model type name of the gearbox being attached. 4) The phase & voltage code A, B, C, D, E, G, J, K, L contain a built-in thermal protector. 5) It is not possible to use an inverter for three phase 380~440V motor. When the inverter is used, the insulation of winding coil becomes hot and may cause damage to the motor.

Max. Permissible Torque at Output Shaft of Gearbox

60Hz

Motor Model	Gearbox Model	Gear Ratio	2	3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120	150	180	200
		r/min	900	600	500	360	300	240	200	180	144	120	100	90	72	60	50	45	36	30	24	20	18	15	12	10	9
9BDG*-60FP	9PBK□BH	kgfcm	5.9	8.9	10.7	14.8	17.8	22.2	26.6	29.6	33.3	40.0	48.0	53.3	60.3	72.3	86.8	96.4	120.5	144.6	161.6	193.9	200.0	200.0	200.0	200.0	200.0
	9PFK□BH	N.m	0.58	0.87	1.04	1.45	1.74	2.17	2.61	2.90	3.27	3.92	4.70	5.23	5.91	7.09	8.50	9.45	11.81	14.17	15.84	19.01	19.60	19.60	19.60	19.60	19.60
9BDG*-60FH	9HBK□BH	kgfcm	-	8.9	10.7	14.8	17.8	22.2	26.6	29.6	33.3	40.0	48.0	53.3	60.3	72.3	86.8	96.4	120.5	144.6	161.6	193.9	215.5	258.6	300.0	300.0	300.0
	9HFK□BH	N.m		0.87	1.04	1.45	1.74	2.17	2.61	2.90	3.27	3.92	4.70	5.23	5.91	7.09	8.50	9.45	11.81	14.17	15.84	19.01	21.12	25.34	29.40	29.40	29.40

Motor Model	Gearbox Model	Gear Ratio	10	12	15	18	25	30	36	50	60
		r/min	180	150	120	100	72	60	50	36	30
9BDG*-60FW	9WD□BL/	kgfcm	30.0	35.1	42.2	48.7	63.9	72.3	84.2	109.6	120.5
	□BR/□BRL	N.m	2.94	3.44	4.13	4.77	6.26	7.09	8.25	10.74	11.81

Motor Model	Gearbox Model	Gear Ratio	5	7.5	10	15	20	25	30	40	50	60	80
		r/min	360	240	180	120	90	72	60	45	36	30	22
9BDG*-60FWH	9WHD	kgfcm	12.7	18.4	23.7	33.3	42.1	48.2	56.1	69.0	78.9	87.7	102.9
	□-030	N.m	1.25	1.80	2.32	3.26	4.12	4.72	5.50	6.76	7.73	8.59	10.08

50Hz

Motor Model	Gearbox Model	Gear Ratio	2	3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120	150	180	200
		r/min	750	500	417	300	250	200	167	150	120	100	83	75	60	50	42	37.5	30	25	20	17	15	12.5	10	8	7.5
9BDG*-60FP	9PBK□BH	kgfcm	7.0	10.5	12.6	17.5	21.0	26.3	31.6	35.1	39.5	47.4	56.9	63.2	71.4	85.7	102.9	114.3	142.9	171.4	191.6	200.0	200.0	200.0	200.0	200.0	200.0
	9PFK□BH	N.m	0.69	1.03	1.24	1.72	2.06	2.58	3.09	3.44	3.87	4.65	5.57	6.19	7.00	8.40	10.08	11.20	14.00	16.80	18.77	19.60	19.60	19.60	19.60	19.60	19.60
9BDG*-60FH	9HBK□BH	kgfcm	-	10.5	12.6	17.5	21.0	26.3	31.6	35.1	39.5	47.4	56.9	63.2	71.4	85.7	102.9	114.3	142.9	171.4	191.6	229.9	255.4	300.0	300.0	300.0	300.0
	9HFK□BH	N.m		1.03	1.24	1.72	2.06	2.58	3.09	3.44	3.87	4.65	5.57	6.19	7.00	8.40	10.08	11.20	14.00	16.80	18.77	22.53	25.03	29.40	29.40	29.40	29.40

Motor Model	Gearbox Model	Gear Ratio	10	12	15	18	25	30	36	50	60
		r/min	150	125	100	83	60	50	42	30	25
9BDG*-60FW	9WD□BL/	kgfcm	35.5	41.6	50.0	57.7	75.8	85.7	99.7	129.9	122.4
	□BR/□BRL	N.m	3.48	4.07	4.90	5.65	7.42	8.40	9.77	12.73	12.00

Motor Model	Gearbox Model	Gear Ratio	5	7.5	10	15	20	25	30	40	50	60	80
		r/min	300	200	150	100	75	60	50	38	30	25	18
9BDG*-60FWH	9WHD	kgfcm	15.1	21.8	28.1	39.5	49.9	57.1	66.5	81.7	93.5	103.9	121.9
	□-030	N.m	1.48	2.14	2.75	3.87	4.89	5.60	6.52	8.01	9.16	10.18	11.95

1) Enter the phase & voltage code in the place * within the motor model name. 2) Enter the gear ratio in the place of □ within the gearbox model name. 3) A colored background indicates the gear shaft rotation in the same direction as the motor shaft ; a white background indicates the rotation in the opposite direction. 4) The rotating speed is calculated by dividing the motor's synchronous speed (50Hz: 1,500r/min, 60Hz: 1,800r/min) by the gear ratio. The actual speed is 2~20% less than the displayed value, depending on the size of the load.

B AC Motors

Brake Motor 60W (□ 90mm)

Dimensions

MOTOR ONLY

● MOTOR MODEL:
9BD□□-60F (GENERAL FAN)

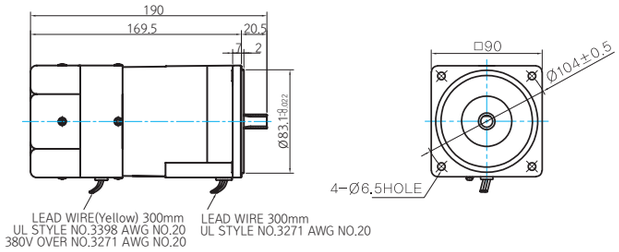

● MOTOR OUTPUT SHAFT

MODEL	SPEC
D-CUT TYPE	
9BDD□-60F	
KEY TYPE	
9BDK□-60F	

● KEY SPEC

MOTOR


INTER-DECIMAL GEARBOX

● MODEL:
9XD10□□

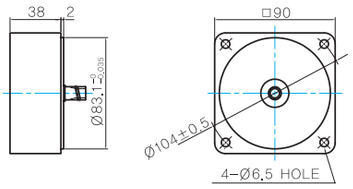

GEARED MOTOR

P TYPE GEARBOX

● MOTOR MODEL:
9BDG□-60FP (GENERAL FAN)

● GEARBOX MODEL:
9PBK□BH

● GEARBOX MODEL:
9PFK□BH

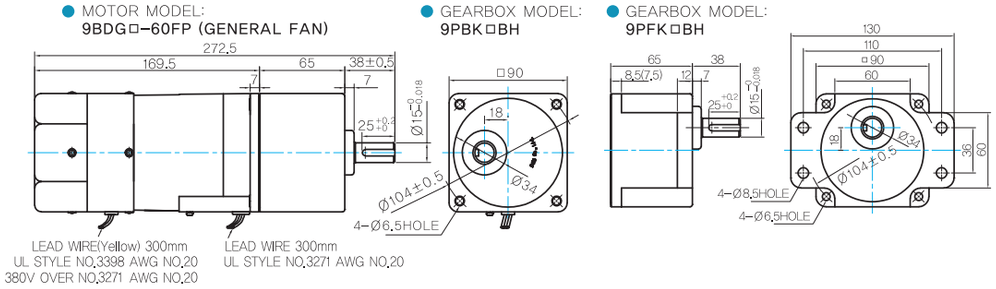

● GEARBOX OUTPUT SHAFT

MODEL	SPEC
KEY TYPE	
9PBK□BH 9PFK□BH	

● KEY SPEC

GEARBOX


H TYPE GEARBOX

● MOTOR MODEL:
9BDG□-60FH (GENERAL FAN)

● GEARBOX MODEL:
9HBK□BH

● GEARBOX MODEL:
9HFK□BH

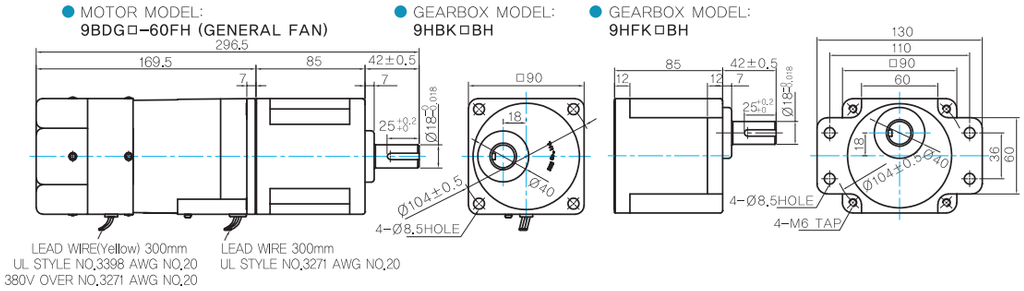

● GEARBOX OUTPUT SHAFT

MODEL	SPEC
KEY TYPE	
9HBK□BH 9HFK□BH	

● KEY SPEC

GEARBOX


W TYPE GEARBOX

● MOTOR MODEL:
9BDG□-60FW (GENERAL FAN)

● GEARBOX MODEL:
9WD□BL/BR/BRL

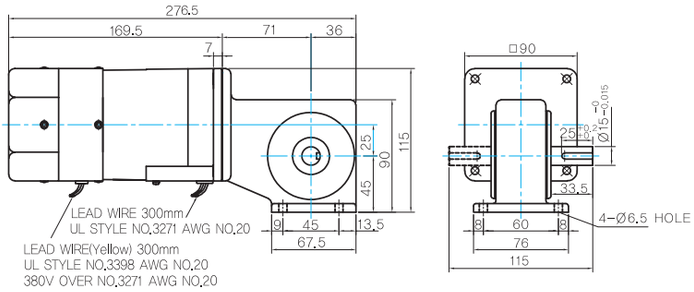

● KEY SPEC

GEARBOX


WH TYPE GEARBOX

● MOTOR MODEL:
9BDG□-60FWH (GENERAL FAN)

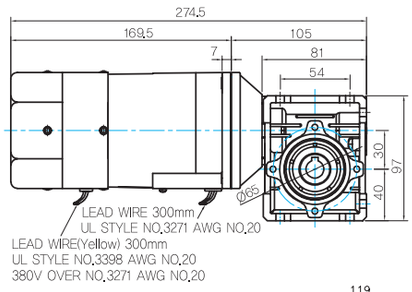

● GEARBOX MODEL:
9WHD□-030





● SHAFT



Unidirectional Bi-directional

● FLANGE

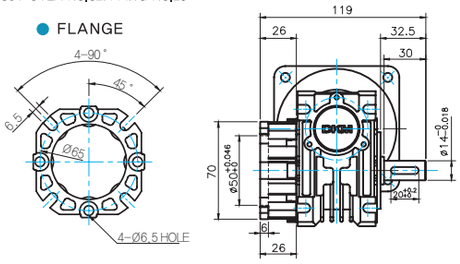

● KEY SPEC



WEIGHT

PART		WEIGHT(kg)
MOTOR		3.30
GEAR BOX	9PB(F)K2BH - 9PB(F)K10BH	1.28
	9PB(F)K12.5BH - 9PB(F)K20BH	1.30
	9PB(F)K25BH - 9PB(F)K60BH	1.45
	9PB(F)K75BH - 9PB(F)K200BH	1.47
	9HB(F)K3BH - 9HB(F)K10BH	1.62
	9HB(F)K12.5BH - 9HB(F)K20BH	1.68
	9HB(F)K25BH - 9HB(F)K60BH	1.73
	9HB(F)K75BH - 9HB(F)K200BH	1.78
	9WD□BL/BR/BRL	1.00
	9WHD□-030	1.20
	9XD10○○	0.60

*The output flange and shaft are sold separately.

Motor Images

9BDD□-60F	9BDG□-60FP+9PBK□BH	9BDG□-60FP+9PFK□BH	9BDG□-60FH+9HBK□BH

9BDG□-60FH+9HFK□BH	9BDG□-60FW+9WD□BL	9BDG□-60FWH+9WHD□

Brake Motor 60W (□ 90mm)

Connection Diagrams

Single Phase

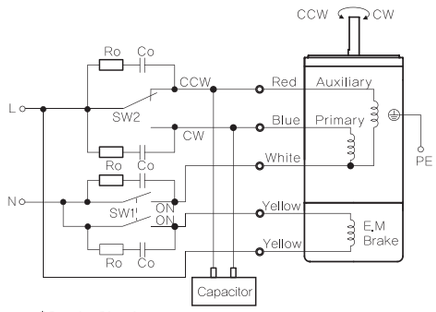

*** Rotation Direction:**
To rotate the motor in a clockwise (CW) direction, turn SW2 to CW.
To rotate the motor in a counterclockwise (CCW) direction, turn SW2 to CCW.

Switch No.	Specifications		Note
	Single Phase 110V/115V Input	Single Phase 220V/230V Input	
SW1	AC 125V 3A minimum (Inductive load)	AC 250V 1.5A minimum (Inductive load)	Switched Simultaneously
SW2			–

Three Phase

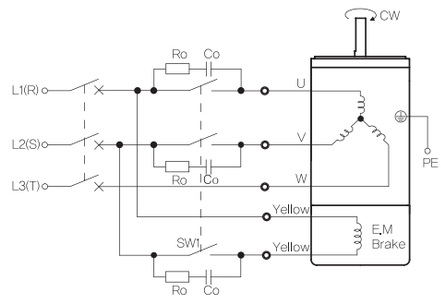

*** CCW Direction:**
Change any two connections between R, S and T.

Switch No.	Specifications	Note
SW1	AC 250V 1.5A minimum (Inductive load)	Switched Simultaneously

INPUT \ LEAD WIRE	U	V	W
3Φ 200V-230V (3, G, J)	WHITE	RED	BLACK
3Φ 380V-400V (4, K)	WHITE	BLUE	BLACK
3Φ 415V-440V (5, L)	WHITE	YELLOW	BLACK

1) SW1 is for motor operation/stop and electronic brake control. (interlocked)
2) When SW1 is turned On, the brake is released and the motor is rotated. When SW1 is turned OFF, the motor is stopped and the brake is applied.
3) To release the brake with the motor stopped, set SW1 to non-interlocked mode and turn on only the switch on the yellow lead wire side.
4) Ro and Co indicate CR circuit for surge suppression. [Ro=5~200Ω, Co=0.1~0.2μF, 200WV (400WV)]
5) When using the inverter, please use the brake power separately. When using the inverter output power, the brake operation power may not be supplied normally depending on the operating frequency.

90W Brake Motor 90W(□ 90mm)

Motor Specification

Model 9BDG*-90F□ : Gear Type Shaft 9BDD*-90F: D-Cut Type Shaft 9BDK*-90F: Key Type Shaft Lead Wire Type	Output W	Voltage V	Frequency Hz	Poles	Duty	Starting Torque kgfcm	Starting Torque N.m	Rated Load Speed r/min	Rated Load Current A	Rated Load Torque kgfcm	Rated Load Torque N.m	Capacitor μF / VAC
9BD◇1(A)-90F□	90	1ø 110	60	4	30min.	6.49	0.649	1600	2.00	5.48	0.548	25.0 / 250
9BD◇B-90F□	90	1ø 100	50	4	30min.	6.80	0.680	1300	1.95	6.74	0.674	30.0 / 250
			60			6.50	0.650	1600	2.10	5.48	0.548	
9BD◇C-90F□	90	1ø 200	50	4	30min.	6.50	0.650	1300	1.15	6.74	0.674	7.0 / 450
			60			6.20	0.620	1600	1.00	5.48	0.548	
9BD◇2(D)-90F□	90	1ø 220	60	4	30min.	6.11	0.611	1600	1.04	5.48	0.548	6.0 / 450
9BD◇E-90F□	90	1ø 220	50	4	30min.	6.07	0.607	1250	0.92	7.01	0.701	6.0 / 450
		1ø 240				7.15	0.715		1.00	7.01	0.701	
9BD◇3(G)-90F□	90	3ø 220	50	4	Cont.	20.50	2.050	1350	0.65	6.49	0.649	-
			60			16.20	1.620	1600	0.60	5.48	0.548	
		3ø 230	50	4	Cont.	22.00	2.200	1350	0.68	6.49	0.649	
			60			17.60	1.760	1600	0.63	5.48	0.548	
9BD◇J-90F□	90	3ø 220	50	4	Cont.	18.50	1.850	1300	0.65	6.74	0.674	-
			60			14.00	1.400	1550	0.60	5.66	0.566	
		3ø 230	50	4	Cont.	20.50	2.050	1350	0.65	6.49	0.649	
			60			16.20	1.620	1600	0.60	5.48	0.548	
9BD◇4(K)-90F□	90	3ø 380	50	4	Cont.	20.00	2.000	1350	0.35	6.49	0.649	-
			60			15.70	1.570	1600	0.33	5.48	0.548	
		3ø 400	50	4	Cont.	21.80	2.180	1350	0.37	6.49	0.649	
			60			17.30	1.730	1600	0.35	5.48	0.548	
9BD◇5(L)-90F□	90	3ø 415	50	4	Cont.	20.50	2.050	1350	0.33	6.49	0.649	-
			60			16.20	1.620	1600	0.31	5.48	0.548	
		3ø 440	50	4	Cont.	22.70	2.270	1350	0.36	6.49	0.649	
			60			18.10	1.810	1600	0.33	5.48	0.548	

Max. Permissible Torque at Output Shaft of Gearbox

1) Enter the phase & voltage code in the place * within the motor model name. 2) Enter the output shaft type of motor in the place ◇ (G: Gear Type / D: D-Cut Type / K: Key Type) and D-Cut Type / Key Type Shaft are for using the motor only. 3) If the motor output shaft type is Gear Type, □ contains the model type name of the gearbox being attached. 4) The phase & voltage code A, B, C, D, E, G, J, K, L contain a built-in thermal protector. 5) It is not possible to use an inverter for three phase 380~440V motor. When the inverter is used, the insulation of winding coil becomes hot and may cause damage to the motor.

60Hz

Motor Model	Gearbox Model	Gear Ratio	2	3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120	150	180	200
		r/min	900	600	500	360	300	240	200	180	144	120	100	90	72	60	50	45	36	30	24	20	18	15	12	10	9
9BDG*-90FP	9PBK□BH	kgfcm	8.9	13.3	16.0	22.2	26.6	33.3	39.9	44.4	50.0	60.0	72.0	80.0	90.4	108.5	130.2	144.6	180.8	200.0	200.0	200.0	200.0	200.0	200.0	200.0	200.0
	9PFK□BH	N.m	0.87	1.30	1.57	2.17	2.61	3.26	3.91	4.35	4.90	5.88	7.06	7.84	8.86	10.63	12.76	14.17	17.72	19.60	19.60	19.60	19.60	19.60	19.60	19.60	19.60
9BDG*-90FH	9HBK□BH	kgfcm	-	13.3	16.0	22.2	26.6	33.3	39.9	44.4	50.0	60.0	72.0	80.0	90.4	108.5	130.2	144.6	180.8	217.0	242.4	290.9	300.0	300.0	300.0	300.0	300.0
	9HFK□BH	N.m		1.30	1.57	2.17	2.61	3.26	3.91	4.35	4.90	5.88	7.06	7.84	8.86	10.63	12.76	14.17	17.72	21.26	23.76	28.51	29.40	29.40	29.40	29.40	29.40

Motor Model	Gearbox Model	Gear Ratio	10	12	15	18	25	30	36	50	60
		r/min	180	150	120	100	72	60	50	36	30
9BDG*-90FW	9WD□BL/□BR/□BRL	kgfcm	44.9	52.6	63.3	73.0	95.9	108.5	126.2	142.9	122.4
		N.m	4.40	5.15	6.20	7.15	9.40	10.63	12.37	14.00	12.00

Motor Model	Gearbox Model	Gear Ratio	5	7.5	10	15	20	25	30	40	50	60	80
		r/min	360	240	180	120	90	72	60	45	36	30	22
9BDG*-90FWH	9WHD□-030	kgfcm	19.1	27.6	35.5	50.0	63.1	72.3	84.2	103.4	118.3	131.5	132.7
		N.m	1.87	2.71	3.48	4.90	6.19	7.09	8.25	10.14	11.60	12.89	13.00

Motor Model	Gearbox Model	Gear Ratio	15	20	25	30	40	50	60	80	100	120	160	200	225	240
		r/min	120	90	72	60	45	36	30	22.5	18	15	11.3	9	8	7.5
9BDG*-90FHC	9HC□-◇	kgfcm	60.0	80.0	100.0	120.0	160.0	200.0	240.0	320.0	399.9	479.9	639.9	799.9	899.9	959.9
		N.m	5.88	7.84	9.80	11.76	15.68	19.60	23.52	31.36	39.19	47.03	62.71	78.39	88.19	94.07

50Hz

Motor Model	Gearbox Model	Gear Ratio	2	3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120	150	180	200
		r/min	750	500	417	300	250	200	167	150	120	100	83	75	60	50	42	37.5	30	25	20	17	15	12.5	10	8	7.5
9BDG*-90FP	9PBK□BH	kgfcm	10.5	15.8	18.9	26.3	31.6	39.4	47.3	52.6	59.3	71.1	85.3	94.8	107.1	128.6	154.3	171.4	200.0	200.0	200.0	200.0	200.0	200.0	200.0	200.0	200.0
	9PFK□BH	N.m	1.03	1.55	1.86	2.58	3.09	3.87	4.64	5.15	5.81	6.97	8.36	9.29	10.50	12.60	15.12	16.80	19.60	19.60	19.60	19.60	19.60	19.60	19.60	19.60	19.60
9BDG*-90FH	9HBK□BH	kgfcm	-	15.8	18.9	26.3	31.6	39.4	47.3	52.6	59.3	71.1	85.3	94.8	107.1	128.6	154.3	171.4	214.3	257.1	287.3	300.0	300.0	300.0	300.0	300.0	300.0
	9HFK□BH	N.m		1.55	1.86	2.58	3.09	3.87	4.64	5.15	5.81	6.97	8.36	9.29	10.50	12.60	15.12	16.80	21.00	25.20	28.16	29.40	29.40	29.40	29.40	29.40	29.40

Motor Model	Gearbox Model	Gear Ratio	10	12	15	18	25	30	36	50	60
		r/min	150	125	100	83	60	50	42	30	25
9BDG*-90FW	9WD□BL/□BR/□BRL	kgfcm	53.2	62.3	75.0	86.5	113.6	128.6	149.6	142.9	122.4
		N.m	5.22	6.11	7.35	8.48	11.14	12.60	14.66	14.00	12.00

Motor Model	Gearbox Model	Gear Ratio	5	7.5	10	15	20	25	30	40	50	60	80
		r/min	300	200	150	100	75	60	50	38	30	25	18
9BDG*-90FWH	9WHD□-030	kgfcm	22.6	32.7	42.1	59.2	74.8	85.7	99.7	122.6	140.3	155.8	132.7
		N.m	2.21	3.21	4.12	5.80	7.33	8.40	9.77	12.01	13.75	15.27	13.00

Motor Model	Gearbox Model	Gear Ratio	15	20	25	30	40	50	60	80	100	120	160	200	225	240
		r/min	100	75	60	50	37.5	30	25	18.8	15	12.5	9.4	7.5	6.7	6.3
9BDG*-90FHC	9HC□-◇	kgfcm	71.1	94.8	118.5	142.2	189.6	237.0	284.4	379.2	474.0	568.8	758.4	948.0	1066.5	1137.6
		N.m	6.97	9.29	11.61	13.94	18.58	23.23	27.87	37.16	46.45	55.74	74.33	92.91	104.52	111.49

1) Enter the phase & voltage code in the place * within the motor model name. 2) Enter the gear ratio in the place of □ and enter the output shaft material in the place of ◇ within the gearbox model name. 3) A colored background indicates the gear shaft rotation in the same direction as the motor shaft ; a white background indicates the rotation in the opposite direction. 4) The rotating speed is calculated by dividing the motor's synchronous speed (50Hz: 1,500r/min, 60Hz: 1,800r/min) by the gear ratio.
The actual speed is 2~20% less than the displayed value, depending on the size of the load.

B AC Motors

Brake Motor 90W (□ 90mm)

Dimensions

MOTOR ONLY

● MOTOR MODEL:
9BD□□-90F (GENERAL FAN)

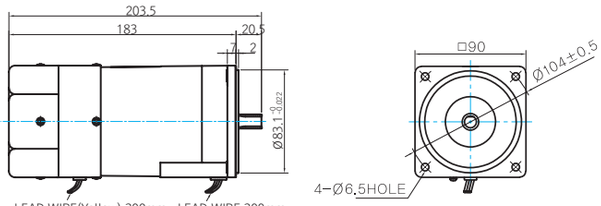

LEAD WIRE(Yellow) 300mm
UL STYLE NO.3398 AWG NO.22
380V OVER NO.3613 AWG NO.22

LEAD WIRE 300mm
UL STYLE NO.3271 AWG NO.22

● MOTOR OUTPUT SHAFT

MODEL	SPEC
D-CUT TYPE	
9BDD□-90F	
KEY TYPE	
9BDK□-90F	

● KEY SPEC

MOTOR



INTER-DECIMAL GEARBOX

● MODEL:
9XD10□□



GEARED MOTOR

P TYPE GEARBOX

● MOTOR MODEL:
9BDG□-90FP (GENERAL FAN)

● GEARBOX MODEL:
9PBK□BH

● GEARBOX MODEL:
9PFK□BH

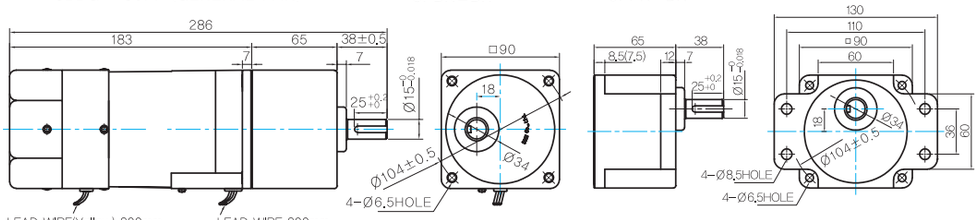

LEAD WIRE(Yellow) 300mm
UL STYLE NO.3398 AWG NO.20
380V OVER NO.3271 AWG NO.20

LEAD WIRE 300mm
UL STYLE NO.3271 AWG NO.20

● GEARBOX OUTPUT SHAFT

MODEL	SPEC
KEY TYPE	
9PBK□BH 9PFK□BH	

● KEY SPEC

GEARBOX



H TYPE GEARBOX

● MOTOR MODEL:
9BDG□-90FH (GENERAL FAN)

● GEARBOX MODEL:
9HBK□BH

● GEARBOX MODEL:
9HFK□BH

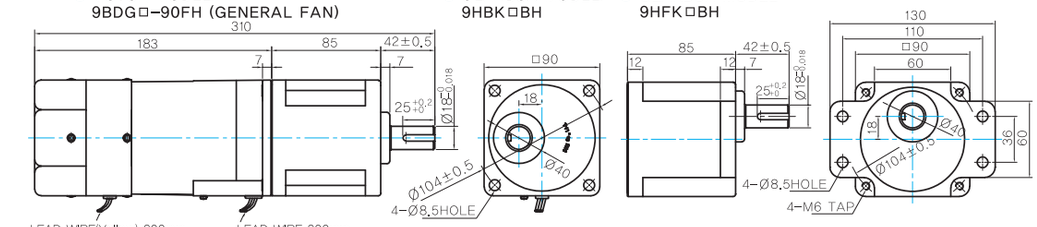

LEAD WIRE(Yellow) 300mm
UL STYLE NO.3398 AWG NO.20
380V OVER NO.3271 AWG NO.20

LEAD WIRE 300mm
UL STYLE NO.3271 AWG NO.20

● GEARBOX OUTPUT SHAFT

MODEL	SPEC
KEY TYPE	
9HBK□BH 9HFK□BH	

● KEY SPEC

GEARBOX



W TYPE GEARBOX

● MOTOR MODEL:
9BDG□-90FW (GENERAL FAN)

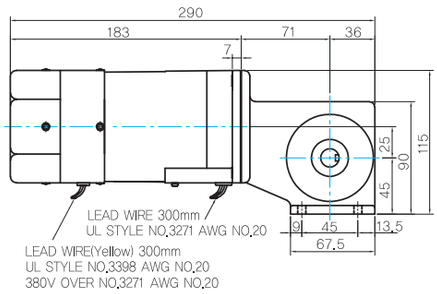

LEAD WIRE 300mm
UL STYLE NO.3271 AWG NO.20

LEAD WIRE(Yellow) 300mm
UL STYLE NO.3398 AWG NO.20
380V OVER NO.3271 AWG NO.20

● GEARBOX MODEL:
9WD□BL/BR/BRL



● KEY SPEC

GEARBOX



WH TYPE GEARBOX

● MOTOR MODEL:
9BDG□-90FWH (GENERAL FAN)

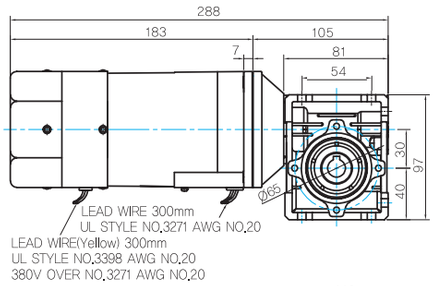

● GEARBOX MODEL:
9WHD□-030





● SHAFT



Unidirectional Bi-directional

● FLANGE

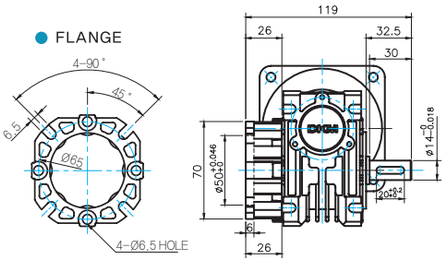

● KEY SPEC



HC TYPE GEARBOX

● MOTOR MODEL :
9BDG□-90FHC (GENERAL FAN)

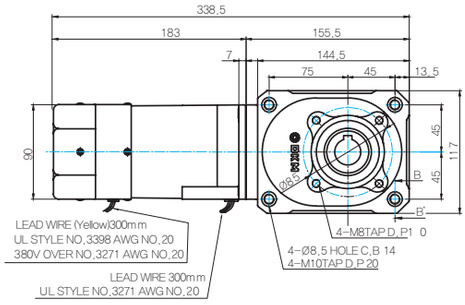

● GEARBOX MODEL:
9HC(15 ~ 60)□



● SHAFT

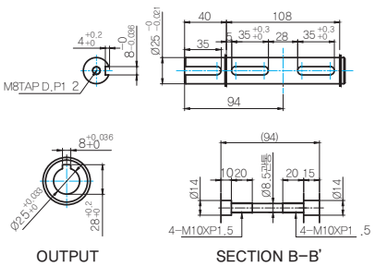

● MOTOR MODEL :
9BDG□-90FHC (GENERAL FAN)

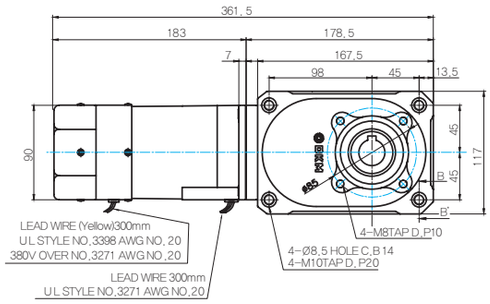

● GEARBOX MODEL :
9HC(80 ~ 240)□



● KEY SPEC



WEIGHT

PART		WEIGHT(kg)
MOTOR		3.70
GEAR BOX	9PB(F)K2BH - 9PB(F)K10BH	1.28
	9PB(F)K12.5BH - 9PB(F)K20BH	1.30
	9PB(F)K25BH - 9PB(F)K60BH	1.45
	9PB(F)K75BH - 9PB(F)K200BH	1.47
	9HB(F)K3BH - 9HB(F)K10BH	1.62
	9HB(F)K12.5BH - 9HB(F)K20BH	1.68
	9HB(F)K25BH - 9HB(F)K60BH	1.73
	9HB(F)K75BH - 9HB(F)K200BH	1.78
	9WD□BL/BR/BRL	1.00
	9WHD□-030	1.20
	9HC15-◇	4.05
	9HC20-◇ - 9HC60-◇	4.10
	9HC80-◇ - 9HC240-◇	4.75
	9XD10○○	0.60

*The output flange and shaft are sold separately.

Brake Motor 90W (□ 90mm)

Motor Images

9BDD□-90F	9BDG□-90FP+9PBK□BH	9BDG□-90FP+9PFK□BH	9BDG□-90FH+9HBK□BH
9BDG□-90FH+9HFK□BH	**9BDG□-90FW+9WD□BL**	**9BDG□-90FWH+9WHD□**	**9BDG□-90FHC+9HC□□**

Connection Diagrams

Single Phase

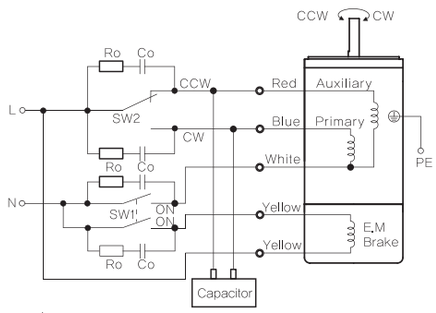

*** Rotation Direction:**
To rotate the motor in a clockwise (CW) direction, turn SW2 to CW.
To rotate the motor in a counterclockwise (CCW) direction, turn SW2 to CCW.

Switch No.	Specifications		Note
	Single Phase 110V/115V Input	Single Phase 220V/230V Input	
SW1	AC 125V 3A minimum (Inductive load)	AC 250V 1.5A minimum (Inductive load)	Switched Simultaneously
SW2			–

Three Phase

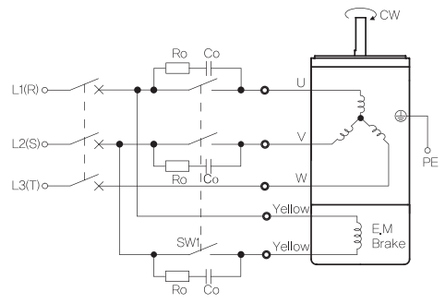

*** CCW Direction:**
Change any two connections between R, S and T.

Switch No.	Specifications	Note
SW1	AC 250V 1.5A minimum (Inductive load)	Switched Simultaneously

INPUT \ LEAD WIRE	U	V	W
3Φ 200V-230V (3, G, J)	WHITE	RED	BLACK
3Φ 380V-400V (4, K)	WHITE	BLUE	BLACK
3Φ 415V-440V (5, L)	WHITE	YELLOW	BLACK

1) SW1 is for motor operation/stop and electronic brake control. (interlocked)
2) When SW1 is turned On, the brake is released and the motor is rotated. When SW1 is turned OFF, the motor is stopped and the brake is applied.
3) To release the brake with the motor stopped, set SW1 to non-interlocked mode and turn on only the switch on the yellow lead wire side.
4) Ro and Co indicate CR circuit for surge suppression. [Ro=5~200Ω, Co=0.1~0.2μF, 200WV (400WV)]
5) When using the inverter, please use the brake power separately. When using the inverter output power, the brake operation power may not be supplied normally depending on the operating frequency.

120W

Brake Motor
120W(□ 90mm)

Motor Specification

Model 9BDG*-120F□ : Gear Type Shaft 9BDD*-120F: D-Cut Type Shaft 9BDK*-120F: Key Type Shaft Lead Wire Type	Output W	Voltage V	Frequency Hz	Poles	Duty	Starting Torque kgfcm	Starting Torque N.m	Rated Load Speed r/min	Rated Load Current A	Rated Load Torque kgfcm	Rated Load Torque N.m	Capacitor μF / VAC
9BD◇1(A)-120F□	120	1ø 110	60	4	30min.	7.11	0.711	1550	2.50	7.54	0.754	30.0 / 250
9BD◇2(D)-120F□	120	1ø 220	60	4	30min.	6.42	0.642	1600	1.08	7.31	0.731	6.5 / 450
9BD◇E-120F□	120	1ø 220	50	4	30min.	6.28	0.628	1250	1.10	9.35	0.935	6.5 / 450
		1ø 240				7.50	0.750		1.21	9.35	0.935	
9BD◇3(G)-120F□	120	3ø 220	50	4	Cont.	24.40	2.440	1300	0.88	8.99	0.899	–
			60			20.00	2.000	1600	0.71	7.31	0.731	
		3ø 230	50	4	Cont.	27.00	2.700	1350	0.86	8.66	0.866	
			60			21.70	2.170	1600	0.76	7.31	0.731	
9BD◇4(K)-120F□	120	3ø 380	50	4	Cont.	24.30	2.430	1300	0.50	8.99	0.899	–
			60			19.90	1.990	1600	0.41	7.31	0.731	
		3ø 400	50	4	Cont.	27.10	2.710	1350	0.49	8.66	0.866	
			60			21.90	2.190	1600	0.43	7.31	0.731	
9BD◇5(L)-120F□	120	3ø 415	50	4	Cont.	24.30	2.430	1300	0.47	8.99	0.899	–
			60			19.90	1.990	1600	0.37	7.31	0.731	
		3ø 440	50	4	Cont.	27.50	2.750	1350	0.47	8.66	0.866	
			60			22.20	2.220	1600	0.40	7.31	0.731	

1) Enter the phase & voltage code in the place * within the motor model name. 2) Enter the output shaft type of motor in the place ◇ (G: Gear Type / D: D-Cut Type / K: Key Type) and D-Cut Type / Key Type Shaft are for using the motor only. 3) If the motor output shaft type is Gear Type, □ contains the model type name of the gearbox being attached. 4) The phase & voltage code A, D, E, G, K, L contain a built-in thermal protector. 5) It is not possible to use an inverter for three phase 380~440V motor. When the inverter is used, the insulation of winding coil becomes hot and may cause damage to the motor.

Max. Permissible Torque at Output Shaft of Gearbox

60Hz

Motor Model	Gearbox Model	Gear Ratio	2	3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120	150	180	200
		r/min	900	600	500	360	300	240	200	180	144	120	100	90	72	60	50	45	36	30	24	20	18	15	12	10	9
9BDG*-120FP	9PBK□BH	kgfcm	11.8	17.8	21.3	29.6	35.5	44.4	53.3	59.2	66.7	80.0	96.0	106.7	120.5	144.6	173.6	192.9	200.0	200.0	200.0	200.0	200.0	200.0	200.0	200.0	200.0
	9PFK□BH	N.m	1.16	1.74	2.09	2.90	3.48	4.35	5.22	5.80	6.53	7.84	9.41	10.45	11.81	14.17	17.01	18.90	19.60	19.60	19.60	19.60	19.60	19.60	19.60	19.60	19.60
9BDG*-120FH	9HBK□BH	kgfcm	–	17.8	21.3	29.6	35.5	44.4	53.3	59.2	66.7	80.0	96.0	106.7	120.5	144.6	173.6	192.9	241.1	289.3	300.0	300.0	300.0	300.0	300.0	300.0	300.0
	9HFK□BH	N.m		1.74	2.09	2.90	3.48	4.35	5.22	5.80	6.53	7.84	9.41	10.45	11.81	14.17	17.01	18.90	23.62	28.35	29.40	29.40	29.40	29.40	29.40	29.40	29.40

Motor Model	Gearbox Model	Gear Ratio	10	12	15	18	25	30	36	50	60
		r/min	180	150	120	100	72	60	50	36	30
9BDG*-120FW	9WD□BL/□BR/□BRL	kgfcm	59.9	70.1	84.4	97.3	127.8	144.6	153.1	142.9	122.4
		N.m	5.87	6.87	8.27	9.54	12.53	14.17	15.00	14.00	12.00

Motor Model	Gearbox Model	Gear Ratio	5	7.5	10	15	20	25	30	40	50	60	80
		r/min	360	240	180	120	90	72	60	45	36	30	22
9BDG*-120FWH	9WHD□-030	kgfcm	25.4	36.8	47.3	66.6	84.2	96.4	112.2	137.9	157.8	163.3	132.7
		N.m	2.49	3.61	4.64	6.53	8.25	9.45	11.00	13.52	15.46	16.00	13.00

Motor Model	Gearbox Model	Gear Ratio	15	20	25	30	40	50	60	80	100	120	160	200	225	240
		r/min	120	90	72	60	45	36	30	22.5	18	15	11.3	9	8	7.5
9BDG*-120FHC	9HC□-◇	kgfcm	80.0	106.7	133.3	160.0	213.3	266.6	320.0	426.6	533.3	639.9	853.2	1066.5	1199.8	1279.8
		N.m	7.84	10.45	13.06	15.68	20.90	26.13	31.36	41.81	52.26	62.71	83.62	104.52	117.58	125.42

50Hz

Motor Model	Gearbox Model	Gear Ratio	2	3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120	150	180	200
		r/min	750	500	417	300	250	200	167	150	120	100	83	75	60	50	42	37.5	30	25	20	17	15	12.5	10	8	7.5
9BDG*-120FP	9PBK□BH	kgfcm	14.0	21.0	25.2	35.1	42.1	52.6	63.1	70.1	79.0	94.8	113.8	126.4	142.9	171.4	200.0	200.0	200.0	200.0	200.0	200.0	200.0	200.0	200.0	200.0	200.0
	9PFK□BH	N.m	1.37	2.06	2.47	3.44	4.12	5.15	6.19	6.87	7.74	9.29	11.15	12.39	14.00	16.80	19.60	19.60	19.60	19.60	19.60	19.60	19.60	19.60	19.60	19.60	19.60
9BDG*-120FH	9HBK□BH	kgfcm	–	21.0	25.2	35.1	42.1	52.6	63.1	70.1	79.0	94.8	113.8	126.4	142.9	171.4	205.7	228.6	285.7	300.0	300.0	300.0	300.0	300.0	300.0	300.0	300.0
	9HFK□BH	N.m		2.06	2.47	3.44	4.12	5.15	6.19	6.87	7.74	9.29	11.15	12.39	14.00	16.80	20.16	22.40	28.00	29.40	29.40	29.40	29.40	29.40	29.40	29.40	29.40

Motor Model	Gearbox Model	Gear Ratio	10	12	15	18	25	30	36	50	60
		r/min	150	125	100	83	60	50	42	30	25
9BDG*-120FHC	9WD□BL/□BR/□BRL	kgfcm	71.0	83.1	100.0	115.3	151.5	170.0	153.1	142.9	122.4
		N.m	6.96	8.15	9.80	11.30	14.85	16.66	15.00	14.00	12.00

Motor Model	Gearbox Model	Gear Ratio	5	7.5	10	15	20	25	30	40	50	60	80
		r/min	300	200	150	100	75	60	50	38	30	25	18
9BDG*-120FWH	9WHD□-030	kgfcm	30.1	43.6	56.1	79.0	99.7	114.3	133.0	163.5	173.5	163.3	132.7
		N.m	2.95	4.28	5.50	7.74	9.77	11.20	13.03	16.02	17.00	16.00	13.00

Motor Model	Gearbox Model	Gear Ratio	15	20	25	30	40	50	60	80	100	120	160	200	225	240
		r/min	100	75	60	50	37.5	30	25	18.8	15	12.5	9.4	7.5	6.7	6.3
9BDG*-120FHC	9HC□-◇	kgfcm	94.8	126.4	158.0	189.6	252.8	316.0	379.2	505.6	632.0	758.4	1011.2	1264.0	1422.0	1516.8
		N.m	9.29	12.39	15.48	18.58	24.78	30.97	37.16	49.55	61.94	74.33	99.10	123.88	139.36	148.65

1) Enter the phase & voltage code in the place * within the motor model name. 2) Enter the gear ratio in the place of □ and enter the output shaft material in the place of ◇ within the gearbox model name. 3) A colored background indicates the gear shaft rotation in the same direction as the motor shaft; a white background indicates the rotation in the opposite direction. 4) The rotating speed is calculated by dividing the motor's synchronous speed (50Hz: 1,500r/min, 60Hz: 1,800r/min) by the gear ratio. The actual speed is 2~20% less than the displayed value, depending on the size of the load.

B AC Motors

Brake Motor 120W (□90mm)

Dimensions

MOTOR ONLY

● MOTOR MODEL:
9BD□□-120F (GENERAL FAN)

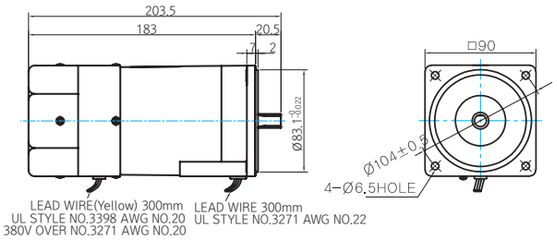

● MOTOR OUTPUT SHAFT

MODEL	SPEC
D-CUT TYPE	
9BDD□-120F	
KEY TYPE	
9BDK□-120F	

● KEY SPEC

MOTOR


INTER-DECIMAL GEARBOX

● MODEL:
9XD10□□



GEARED MOTOR

P TYPE GEARBOX

● MOTOR MODEL:
9BDG□-120FP (GENERAL FAN)

● GEARBOX MODEL:
9PBK□BH

● GEARBOX MODEL:
9PFK□BH

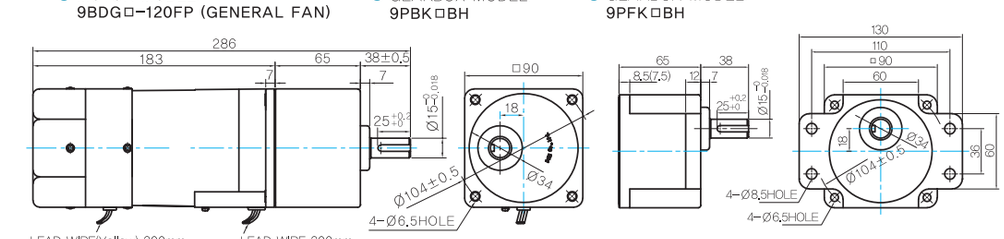

● GEARBOX OUTPUT SHAFT

MODEL	SPEC
KEY TYPE	
9PBK□BH 9PFK□BH	

● KEY SPEC

GEARBOX


H TYPE GEARHEAD

● MOTOR MODEL:
9BDG□-120FH (GENERAL FAN)

● GEARBOX MODEL:
9HBK□BH

● GEARBOX MODEL:
9HFK□BH

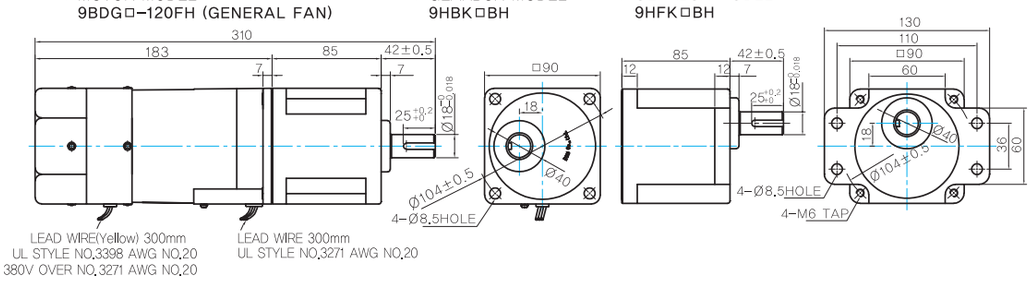

● GEARBOX OUTPUT SHAFT

MODEL	SPEC
KEY TYPE	
9HBK□BH 9HFK□BH	

● KEY SPEC

GEARBOX


W TYPE GEARBOX

● MOTOR MODEL:
9BDG□-120FW (GENERAL FAN)

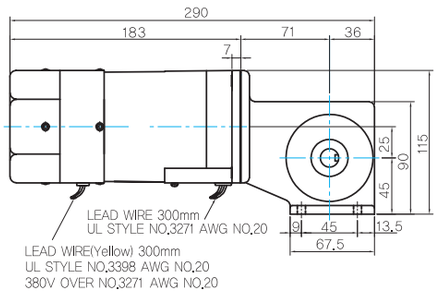

● GEARBOX MODEL:
9WD□BL/BR/BRL



● KEY SPEC

GEARBOX


WH TYPE GEARBOX

● MOTOR MODEL:
9BDG□-120FWH (GENERAL FAN)

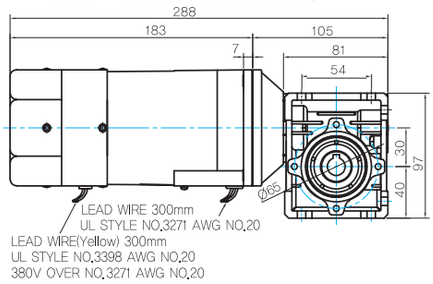

● GEARBOX MODEL:
9WHD□-030





● SHAFT



Unidirectional Bi-directional

● FLANGE

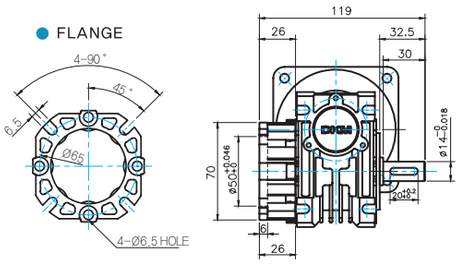

● KEY SPEC



HC TYPE GEARBOX

● MOTOR MODEL :
9BDG□-120FHC (GENERAL FAN)

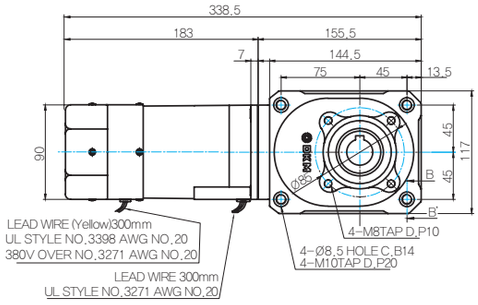

● GEARBOX MODEL:
9HC(15 ~ 60)□



● SHAFT

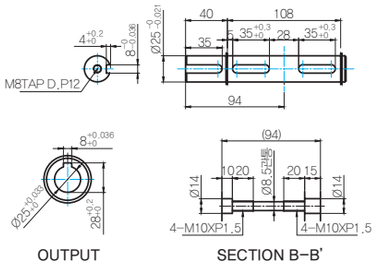

OUTPUT SECTION B-B'

● MOTOR MODEL :
9BDG□-120FHC (GENERAL FAN)

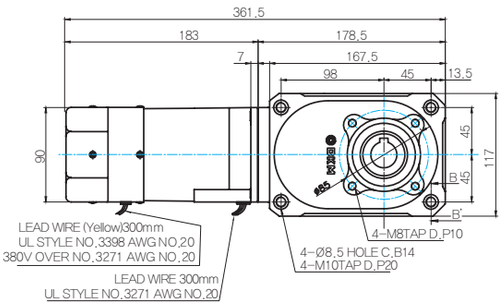

● GEARBOX MODEL :
9HC(80 ~ 240)□



● KEY SPEC



WEIGHT

PART		WEIGHT(kg)
MOTOR		3.70
GEAR BOX	9PB(F)K2BH - 9PB(F)K10BH	1.28
	9PB(F)K12.5BH - 9PB(F)K20BH	1.30
	9PB(F)K25BH - 9PB(F)K60BH	1.45
	9PB(F)K75BH - 9PB(F)K200BH	1.47
	9HB(F)K3BH - 9HB(F)K10BH	1.62
	9HB(F)K12.5BH - 9HB(F)K20BH	1.68
	9HB(F)K25BH - 9HB(F)K60BH	1.73
	9HB(F)K75BH - 9HB(F)K200BH	1.78
	9WD□BL/BR/BRL	1.00
	9WHD□-030	1.20
	9HC15-◇	4.05
	9HC20-◇ - 9HC60-◇	4.10
	9HC80-◇ - 9HC240-◇	4.75
	9XD10○○	0.60

*The output flange and shaft are sold separately.

B AC Motors

Brake Motor 120W (□90mm)

Motor Images

9BDD□-120F	9BDG□-120FP+9PBK□BH	9BDG□-120FP+9PFK□BH	9BDG□-120FH+9HBK□BH
9BDG□-120FH+9HFK□BH	**9BDG□-120FW+9WD□BL**	**9BDG□-120FWH+9WHD□**	**9BDG□-120FHC+9HC□□**

Connection Diagrams

Single Phase

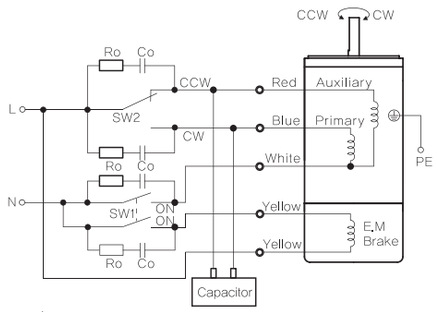

*** Rotation Direction:**
To rotate the motor in a clockwise (CW) direction, turn SW2 to CW.
To rotate the motor in a counterclockwise (CCW) direction, turn SW2 to CCW.

Switch No.	Specifications		Note
	Single Phase 110V/115V Input	Single Phase 220V/230V Input	
SW1	AC 125V 3A minimum (Inductive load)	AC 250V 1.5A minimum (Inductive load)	Switched Simultaneously
SW2			–

Three Phase

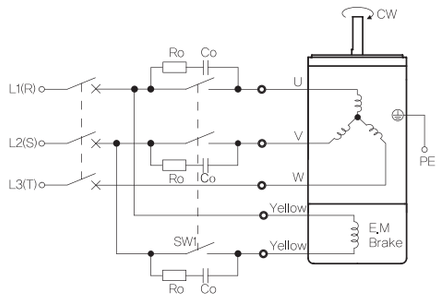

*** CCW Direction:**
Change any two connections between R, S and T.

Switch No.	Specifications	Note
SW1	AC 250V 1.5A minimum (Inductive load)	Switched Simultaneously

INPUT \ LEAD WIRE	U	V	W
3Φ 200V-230V (3, G, J)	WHITE	RED	BLACK
3Φ 380V-400V (4, K)	WHITE	BLUE	BLACK
3Φ 415V-440V (5, L)	WHITE	YELLOW	BLACK

1) SW1 is for motor operation/stop and electronic brake control. (interlocked)
2) When SW1 is turned On, the brake is released and the motor is rotated. When SW1 is turned OFF, the motor is stopped and the brake is applied.
3) To release the brake with the motor stopped, set SW1 to non-interlocked mode and turn on only the switch on the yellow lead wire side.
4) Ro and Co indicate CR circuit for surge suppression. [Ro=5~200Ω, Co=0.1~0.2μF, 200WV (400WV)]
5) When using the inverter, please use the brake power separately. When using the inverter output power, the brake operation power may not be supplied normally depending on the operating frequency.

150W Brake Motor 150W(□ 90mm)

Motor Specification

Model 9BDG*-150F□ : Gear Type Shaft 9BDD*-150F: D-Cut Type Shaft 9BDK*-150F: Key Type Shaft Lead Wire Type	Output W	Voltage V	Frequency Hz	Poles	Duty	Starting Torque kgfcm	Starting Torque N.m	Rated Load Speed r/min	Rated Load Current A	Rated Load Torque kgfcm	Rated Load Torque N.m	Capacitor μF / VAC
9BD◇3(G)-150F□	150	3ø 220	50	4	Cont.	25.70	2.570	1300	0.94	11.24	1.124	–
			60			20.50	2.050	1550	0.84	9.43	0.943	
		3ø 230	50	4	Cont.	27.50	2.750	1300	1.02	11.24	1.124	
			60			22.20	2.220	1550	0.89	9.43	0.943	
9BD◇4(K)-150F□	150	3ø380	50	4	Cont.	25.10	2.510	1300	0.53	11.24	1.124	–
			60			20.00	2.000	1550	0.48	9.43	0.943	
		3ø400	50	4	Cont.	27.30	2.730	1300	0.57	11.24	1.124	
			60			22.00	2.200	1550	0.50	9.43	0.943	
9BD◇5(L)-150F□	150	3ø415	50	4	Cont.	25.00	2.500	1300	0.51	11.24	1.124	–
			60			22.10	2.210	1550	0.45	9.43	0.943	
		3ø440	50	4	Cont.	27.20	2.720	1300	0.55	11.24	1.124	
			60			22.40	2.240	1550	0.48	9.43	0.943	

1) Enter the phase & voltage code in the place * within the motor model name. 2) Enter the output shaft type of motor in the place ◇ (G: Gear Type / D: D-Cut Type / K: Key Type) and D-Cut Type / Key Type Shaft are for using the motor only. 3) If the motor output shaft type is Gear Type, □ contains the model type name of the gearbox being attached. 4) The phase & voltage code G, K, L contain a built-in thermal protector. 5) It is not possible to use an inverter for three phase 380~440V motor. When the inverter is used, the insulation of winding coil becomes hot and may cause damage to the motor.

Max. Permissible Torque at Output Shaft of Gearbox

60Hz

Motor Model	Gearbox Model	Gear Ratio	3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120	150	180	200
		r/min	600	500	360	300	240	200	180	144	120	100	90	72	60	50	45	36	30	24	20	18	15	12	10	9
9BDG*-150FH	9HBK□BH	kgfcm	22.9	27.5	38.2	45.8	57.3	68.7	76.3	86.0	103.2	123.9	137.6	155.5	186.6	224.0	248.8	300.0	300.0	300.0	300.0	300.0	300.0	300.0	300.0	300.0
	9HFK□BH	N.m	2.24	2.69	3.74	4.49	5.61	6.73	7.48	8.43	10.11	12.14	13.49	15.24	18.29	21.95	24.39	29.40	29.40	29.40	29.40	29.40	29.40	29.40	29.40	29.40

Motor Model	Gearbox Model	Gear Ratio	5	7.5	10	15	20	25	30	40	50	60	80	100
		r/min	360	240	180	120	90	72	60	45	36	30	22	18
9BDG*-150FWH	9WHD□-030	kgfcm	32.8	47.5	61.1	86.0	108.6	124.4	144.8	178.0	173.5	163.3	132.7	–
		N.m	3.21	4.66	5.99	8.42	10.64	12.19	14.19	17.44	17.00	16.00	13.00	–
	9WHD□-040	kgfcm	–	–	–	–	–	–	–	–	230.0	257.9	295.0	270.0
		N.m	–	–	–	–	–	–	–	–	22.54	25.27	28.91	26.46

Motor Model	Gearbox Model	Gear Ratio	15	20	25	30	40	50	60	80	100	120	160	200	225	240
		r/min	120	90	72	60	45	36	30	22.5	18	15	11.3	9	8	7.5
9BDG*-150FHC	9HC□-◇	kgfcm	103.2	137.6	172.0	206.4	275.2	344.0	412.9	550.5	688.1	825.7	1100.9	1376.2	1548.2	1651.4
		N.m	10.11	13.49	16.86	20.23	26.97	33.72	40.46	53.95	67.43	80.92	107.89	134.86	151.72	161.84

50Hz

Motor Model	Gearbox Model	Gear Ratio	3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120	150	180	200
		r/min	500	417	300	250	200	167	150	120	100	83	75	60	50	42	37.5	30	25	20	17	15	12.5	10	8	7.5
9BDG*-150FH	9HBK□BH	kgfcm	27.3	32.8	45.5	54.6	68.3	81.9	91.0	102.6	123.1	147.7	164.1	185.4	222.5	267.0	296.7	300.0	300.0	300.0	300.0	300.0	300.0	300.0	300.0	300.0
	9HFK□BH	N.m	2.68	3.21	4.46	5.35	6.69	8.03	8.92	10.05	12.06	14.47	16.08	18.17	21.81	26.17	29.08	29.40	29.40	29.40	29.40	29.40	29.40	29.40	29.40	29.40

Motor Model	Gearbox Model	Gear Ratio	5	7.5	10	15	20	25	30	40	50	60	80	100
		r/min	300	200	150	100	75	60	50	38	30	25	18	15
9BDG*-150FWH	9WHD□-030	kgfcm	39.1	56.6	72.8	102.5	129.5	148.3	172.6	183.7	173.5	163.3	132.7	–
		N.m	3.83	5.55	7.14	10.04	12.69	14.54	16.92	18.00	17.00	16.00	13.00	–
	9WHD□-040	kgfcm	–	–	–	–	–	–	–	–	274.2	307.5	295.0	270.0
		N.m	–	–	–	–	–	–	–	–	26.87	30.13	28.91	26.46

Motor Model	Gearbox Model	Gear Ratio	15	20	25	30	40	50	60	80	100	120	160	200	225	240
		r/min	100	75	60	50	37.5	30	25	18.8	15	12.5	9.4	7.5	6.7	6.3
9BDG*-150FHC	9HC□-◇	kgfcm	123.1	164.1	205.1	246.1	328.2	410.2	492.2	656.3	820.4	984.5	1312.7	1640.8	1800.0	1800.0
		N.m	12.06	16.08	20.10	24.12	32.16	40.20	48.24	64.32	80.40	96.48	128.64	160.80	176.40	176.40

1) Enter the phase & voltage code in the place * within the motor model name. 2) Enter the gear ratio in the place of □ and enter the output shaft material in the place of ◇ within the gearbox model name. 3) A colored background indicates the gear shaft rotation in the same direction as the motor shaft ; a white background indicates the rotation in the opposite direction. 4) The rotating speed is calculated by dividing the motor's synchronous speed (50Hz: 1,500r/min, 60Hz: 1,800r/min) by the gear ratio.
The actual speed is 2~20% less than the displayed value, depending on the size of the load.

B AC Motors

Brake Motor 150W (□90mm)

Dimensions

MOTOR ONLY

● MOTOR MODEL:
9BD□□−150F (GENERAL FAN)

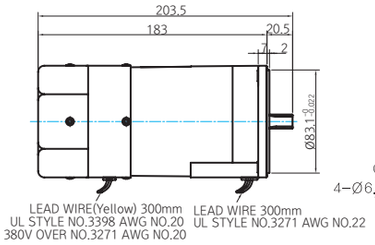



● MOTOR OUTPUT SHAFT

MODEL	SPEC
D-CUT TYPE	
9BDD□−150F	
KEY TYPE	
9BDK□−150F	

● KEY SPEC

MOTOR



GEARED MOTOR

H TYPE GEARBOX

● MOTOR MODEL:
9BDG□−150FH (GENERAL FAN)

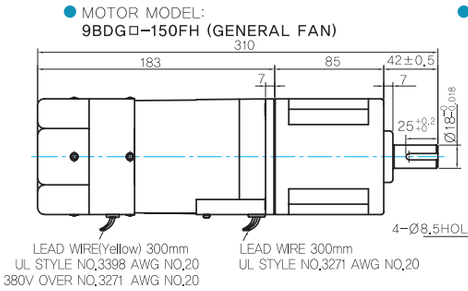

● GEARBOX MODEL:
9HBK□BH



● GEARBOX MODEL:
9HFK□BH

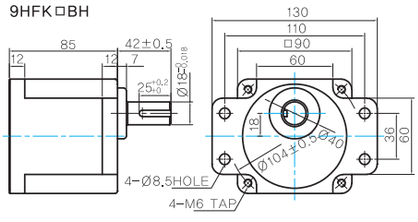

● GEARBOX OUTPUT SHAFT

MODEL	SPEC
KEY TYPE	
9HBK□BH 9HFK□BH	

● KEY SPEC

GEARBOX



WH TYPE GEARBOX

● MOTOR MODEL:
9BDG□−150FWH (GENERAL FAN)

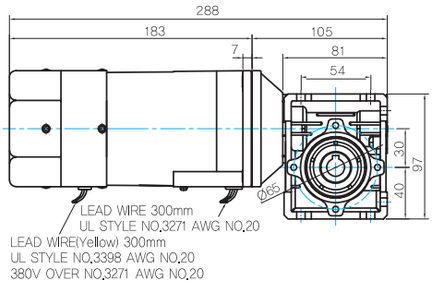

● GEARBOX MODEL:
9WHD□−030



● SHAFT

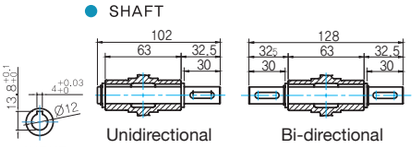

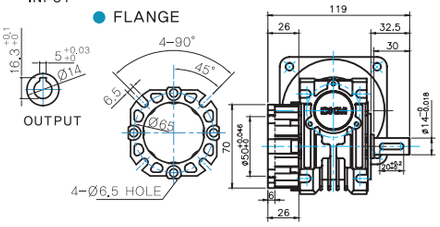

● KEY SPEC

GEARBOX



*The output flange and shaft are sold separately.

● MOTOR MODEL:
9BDG□−150FWH (GENERAL FAN)

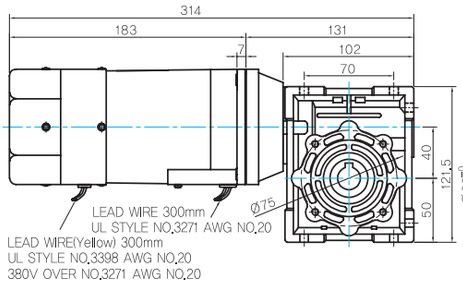

● GEARBOX MODEL:
9WHD□−040



● SHAFT

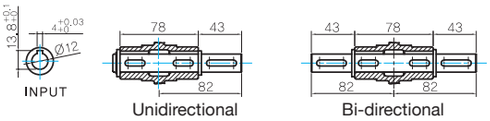

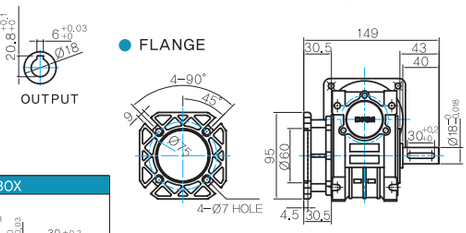

● KEY SPEC

GEARBOX



HC TYPE GEARBOX

● MOTOR MODEL :
9BDG□-150FHC (GENERAL FAN)

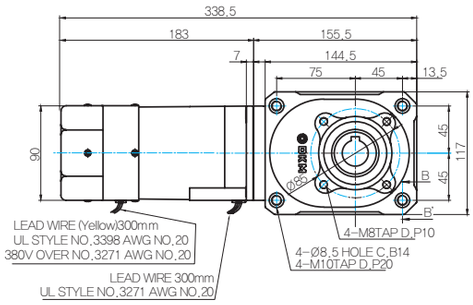

● GEARBOX MODEL:
9HC(15 ~ 60)□



● SHAFT

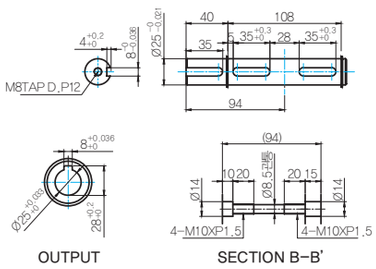

● MOTOR MODEL :
9BDG□-150FHC (GENERAL FAN)

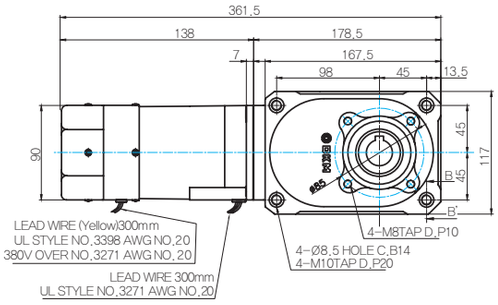

● GEARBOX MODEL :
9HC(80 ~ 240)□



● KEY SPEC

GEARBOX



WEIGHT

PART		WEIGHT(kg)
MOTOR		3.70
GEAR BOX	9HB(F)K3BH - 9HB(F)K10BH	1.62
	9HB(F)K12.5BH - 9HB(F)K20BH	1.68
	9HB(F)K25BH - 9HB(F)K60BH	1.73
	9HB(F)K75BH - 9HB(F)K200BH	1.78
	9WHD□-030	1.20
	9WHD□-040	2.10
	9HC15-◇	4.05
	9HC20-◇ - 9HC60-◇	4.10
	9HC80-◇ - 9HC240-◇	4.75
	9XD10○○	0.60

*The output flange and shaft are sold separately.

Motor Images

9BDD□-150F	9BDG□-150FH+9HBK□BH	9BDG□-150FH+9HFK□BH	9BDG□-150FWH+9WHD□	9BDG□-150FHC+9HC□□

Connection Diagrams

Three Phase

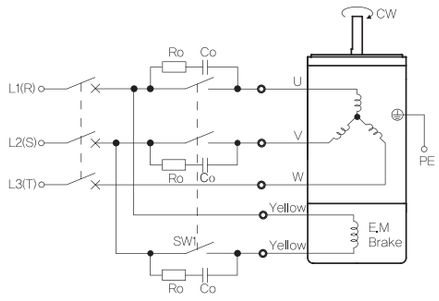

1) The direction of motor rotation is as viewed from the shaft end of the motor.
2) CW represents the clockwise direction, while CCW represents the counterclockwise direction.
3) SW1 operates both motor and electromagnetic brake action.
4) The electromagnetic brake will be released and the motor will rotate when SW1 is switched simultaneously to ON. When SW1 is switched simultaneously to OFF, the motor stops immediately with the electromagnetic brake and holds the load.
5) If you wish to release the brake while the motor is stopped, apply voltage between the two brake lead wires (yellow).
6) Ro and Co indicate CR circuit for surge suppression. [Ro=5~200Ω, Co=0.1~0.2㎌, 200WV (400WV)]

*** CCW Direction:**
Change any two connections between R, S and T.

Switch No.	Specifications	Note
SW1	AC 250V 1.5A minimum (Inductive load)	Switched Simultaneously

INPUT \ LEAD WIRE	U	V	W
3Φ 200V-230V (3, G, J)	WHITE	RED	BLACK
3Φ 380V-400V (4, K)	WHITE	BLUE	BLACK
3Φ 415V-440V (5, L)	WHITE	YELLOW	BLACK

180W Brake Motor 180W(□90mm)

Motor Specification

Model 9BDG*-180F□: Gear Type Shaft 9BDD*-180F: D-Cut Type Shaft 9BDK*-180F: Key Type Shaft Lead Wire Type	Output W	Voltage V	Frequency Hz	Poles	Duty	Starting Torque kgfcm	Starting Torque N.m	Rated Load Speed r/min	Rated Load Current A	Rated Load Torque kgfcm	Rated Load Torque N.m	Capacitor μF / VAC
9BD◇1(A)-180F□	180	1ø110	60	4	30min.	7.40	0.740	1600	3.00	10.96	1.096	30.0 / 250
9BD◇2(D)-180F□	180	1ø220	60	4	30min.	7.40	0.740	1600	1.50	10.96	1.096	8.0 / 450
9BD◇E-180F□	180	1ø220	50	4	30min.	7.00	0.700	1250	1.50	14.03	1.403	8.0 / 450
		1ø240				7.80	0.780	1300	1.60	13.49	1.349	

1) Enter the phase & voltage code in the place * within the motor model name.
2) Enter the output shaft type of motor in the place ◇ (G: Gear Type / D: D-Cut Type / K: Key Type) and D-Cut Type / Key Type Shaft are for using the motor only.
3) If the motor output shaft type is Gear Type, □ contains the model type name of the gearbox being attached.
4) The phase & voltage code A, D, E, contain a built-in thermal protector.

Max. Permissible Torque at Output Shaft of Gearbox

60Hz

Motor Model	Gearbox Model	Gear Ratio	3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120	150	180	200
		r/min	600	500	360	300	240	200	180	144	120	100	90	72	60	50	45	36	30	24	20	18	15	12	10	9
9BDG*-180FH	9HBK□BH	kgfcm	26.6	32.0	44.4	53.3	66.6	79.9	88.8	100.0	120.0	144.0	160.0	180.8	217.0	260.4	289.3	300.0	300.0	300.0	300.0	300.0	300.0	300.0	300.0	300.0
	9HFK□BH	N.m	2.61	3.13	4.35	5.22	6.52	7.83	8.70	9.80	11.76	14.11	15.68	17.72	21.26	25.51	28.35	29.40	29.40	29.40	29.40	29.40	29.40	29.40	29.40	29.40

Motor Model	Gearbox Model	Gear Ratio	5	7.5	10	15	20	25	30	40	50	60	80	100
		r/min	360	240	180	120	90	72	60	45	36	30	22	18
9BDG*-180FWH	9WHD□-030	kgfcm	38.1	55.2	71.0	99.9	126.2	144.6	168.3	183.7	173.5	163.3	132.7	–
		N.m	3.74	5.41	6.96	9.79	12.37	14.17	16.49	18.00	17.00	16.00	13.00	–
	9WHD□-040	kgfcm	–	–	–	–	–	–	–	–	267.4	299.8	295.0	270.0
		N.m	–	–	–	–	–	–	–	–	26.20	29.38	28.91	26.46

Motor Model	Gearbox Model	Gear Ratio	15	20	25	30	40	50	60	80	100	120	160	200	225	240
		r/min	120	90	72	60	45	36	30	22.5	18	15	11.3	9	8	7.5
9BDG*-180FHC	9HC□-◇	kgfcm	120.0	160.0	200.0	240.0	320.0	399.9	479.9	639.9	799.9	959.9	1279.8	1599.8	1799.8	1800.0
		N.m	11.76	15.68	19.60	23.52	31.36	39.19	47.03	62.71	78.39	94.07	125.42	156.78	176.38	176.40

50Hz

Motor Model	Gearbox Model	Gear Ratio	3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120	150	180	200
		r/min	500	417	300	250	200	167	150	120	100	83	75	60	50	42	37.5	30	25	20	17	15	12.5	10	8	7.5
9BDG*-180FH	9HBK□BH	kgfcm	32.8	39.3	54.6	65.5	81.9	98.3	109.2	123.1	147.7	177.2	196.9	222.5	267.0	300.0	300.0	300.0	300.0	300.0	300.0	300.0	300.0	300.0	300.0	300.0
	9HFK□BH	N.m	3.21	3.85	5.35	6.42	8.03	9.63	10.71	12.06	14.47	17.37	19.30	21.81	26.17	29.40	29.40	29.40	29.40	29.40	29.40	29.40	29.40	29.40	29.40	29.40

Motor Model	Gearbox Model	Gear Ratio	5	7.5	10	15	20	25	30	40	50	60	80	100
		r/min	300	200	150	100	75	60	50	38	30	25	18	15
9BDG*-180FWH	9WHD□-030	kgfcm	46.9	68.0	87.4	123.0	155.4	178.0	204.1	183.7	173.5	163.3	132.7	–
		N.m	4.60	6.66	8.56	12.05	15.23	17.45	20.00	18.00	17.00	16.00	13.00	–
	9WHD□-040	kgfcm	–	–	–	–	–	–	–	–	329.1	330.0	295.0	270.0
		N.m	–	–	–	–	–	–	–	–	32.25	32.34	28.91	26.46

Motor Model	Gearbox Model	Gear Ratio	15	20	25	30	40	50	60	80	100	120	160	200	225	240
		r/min	100	75	60	50	37.5	30	25	18.8	15	12.5	9.4	7.5	6.7	6.3
9BDG*-180FHC	9HC□-◇	kgfcm	147.7	196.9	246.1	295.3	393.8	492.2	590.7	787.6	984.5	1181.4	1575.2	1800.0	1800.0	1800.0
		N.m	14.47	19.30	24.12	28.94	38.59	48.24	57.89	77.18	96.48	115.78	154.37	176.40	176.40	176.40

1) Enter the phase & voltage code in the place * within the motor model name.
2) Enter the gear ratio in the place of □ and enter the output shaft material in the place of ◇ within the gearbox model name.
3) A colored background indicates the gear shaft rotation in the same direction as the motor shaft
: a white background indicates the rotation in the opposite direction.
4) The rotating speed is calculated by dividing the motor's synchronous speed (50Hz: 1,500r/min, 60Hz: 1,800r/min) by the gear ratio.
The actual speed is 2~20% less than the displayed value, depending on the size of the load.

Dimensions

MOTOR ONLY

● MOTOR MODEL:
9BD□□−180F (GENERAL FAN)

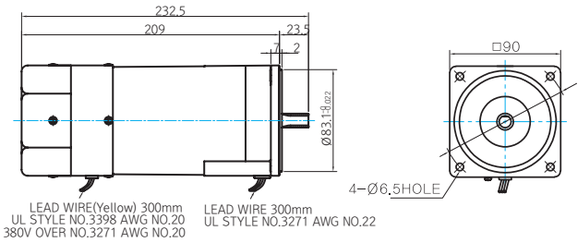

● MOTOR OUTPUT SHAFT

MODEL	SPEC
D−CUT TYPE	
9BDD□−180F	
KEY TYPE	
9BDK□−180F	

● KEY SPEC

MOTOR



GEARED MOTOR

H TYPE GEARBOX

● MOTOR MODEL:
9BDG□−180FH (GENERAL FAN)

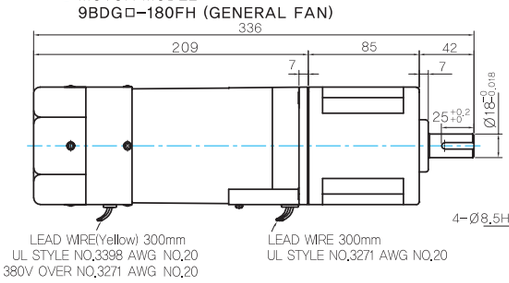

● GEARBOX MODEL:
9HBK□BH



● GEARBOX MODEL:
9HFK□BH

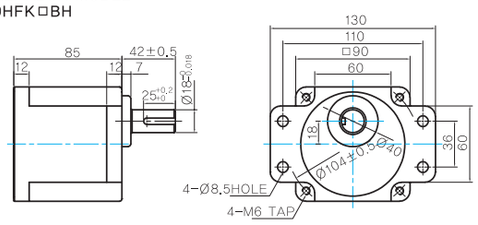

● GEARBOX OUTPUT SHAFT

MODEL	SPEC
KEY TYPE	
9HBK□BH 9HFK□BH	

● KEY SPEC

GEARBOX



WH TYPE GEARBOX

● MOTOR MODEL:
9BDG□−180FWH (GENERAL FAN)

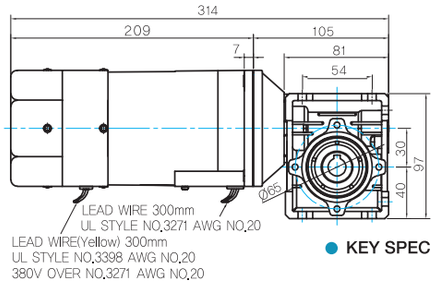

● KEY SPEC

● GEARBOX MODEL:
9WHD□−030



● SHAFT

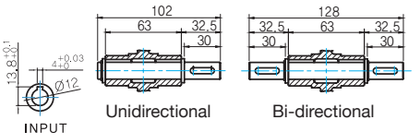

● FLANGE

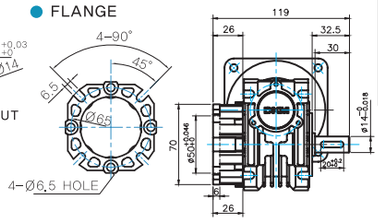

● KEY SPEC

GEARBOX



*The output flange and shaft are sold separately.

● MOTOR MODEL:
9BDG□−180FWH (GENERAL FAN)

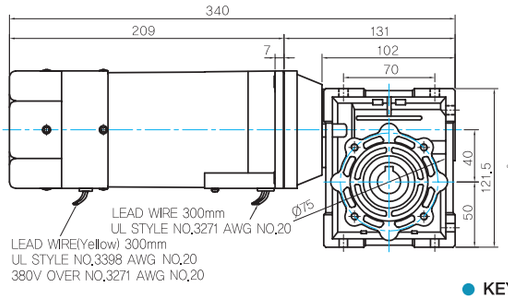

● GEARBOX MODEL:
9WHD□−040



● SHAFT



● FLANGE

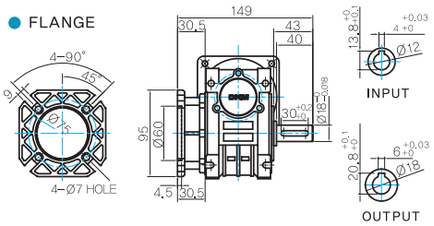

● KEY SPEC

GEARBOX



B AC Motors

Brake Motor 180W (□90mm)

HC TYPE GEARBOX

● MOTOR MODEL :
9BDG□-180FHC (GENERAL FA N)

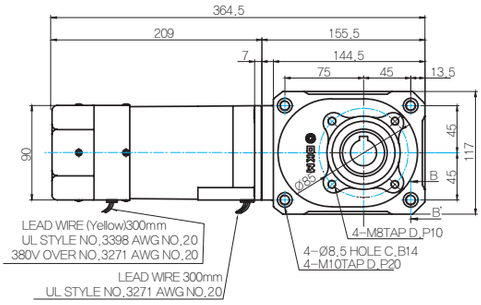

● GEARBOX MODEL:
9HC(15 ~ 60)□



● SHAFT

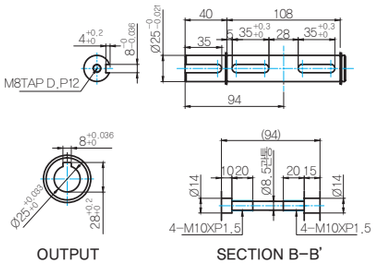

● MOTOR MODEL :
9BDG□-180FHC (GENERAL FA N)

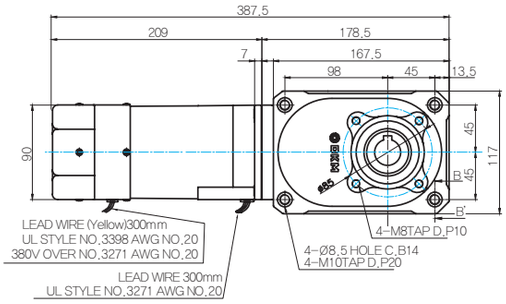

● GEARBOX MODEL :
9HC(80 ~ 240)□



● KEY SPEC

GEARBOX



WEIGHT

PART		WEIGHT(kg)
MOTOR		4.40
GEAR BOX	9HB(F)K3BH - 9HB(F)K10BH	1.62
	9HB(F)K12.5BH - 9HB(F)K20BH	1.68
	9HB(F)K25BH - 9HB(F)K60BH	1.73
	9HB(F)K75BH - 9HB(F)K200BH	1.78
	9WHD□-030	1.20
	9WHD□-040	2.10
	9HC15-◇	4.05
	9HC20-◇ - 9HC60-◇	4.10
	9HC80-◇ - 9HC240-◇	4.75
	9XD10○○	0.60

*The output flange and shaft are sold separately.

Motor Images

9BDD□-180F	9BDG□-180FH+9HBK□BH	9BDG□-180FH+9HFK□BH	9BDG□-180FWH+9WHD□	9BDG□-180FHC+9HC□□

Connection Diagrams

Single Phase

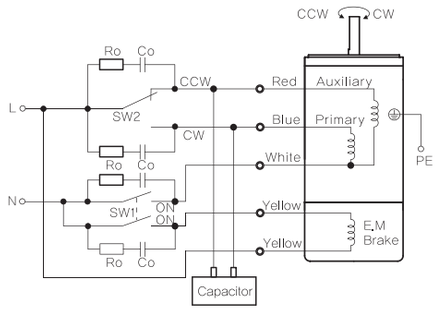

1) The direction of motor rotation is as viewed from the shaft end of the motor.
2) CW represents the clockwise direction, while CCW represents the counterclockwise direction.
3) SW1 operates both motor and electromagnetic brake action.
4) The electromagnetic brake will be released and the motor will rotate when SW1 is switched simultaneously to ON. When SW1 is switched simultaneously to OFF, the motor stops immediately with the electromagnetic brake and holds the load.
5) If you wish to release the brake while the motor is stopped, apply voltage between the two brake lead wires (yellow).
6) Ro and Co indicate CR circuit for surge suppression. [Ro=5~200Ω, Co=0.1~0.2μF, 200WV (400WV)]

Switch No.	Specifications		Note
	Single Phase 110V/115V Input	Single Phase 220V/230V Input	
SW1	AC 125V 3A minimum (Inductive load)	AC 250V 1.5A minimum (Inductive load)	Switched Simultaneously
SW2			–

*** Rotation Direction:**
To rotate the motor in a clockwise (GW) direction, turn SW2 to CW.
To rotate the motor in a counterclockwise (CCW direction, turn SW2 to CCW.

200W

Brake Motor
200W(□ 90mm)

Motor Specification

Model 9BDG*-150F□ : Gear Type Shaft 9BDD*-150F: D-Cut Type Shaft 9BDK*-150F: Key Type Shaft Lead Wire Type	Output W	Voltage V	Frequency Hz	Poles	Duty	Starting Torque kgfcm	Starting Torque N.m	Rated Load Speed r/min	Rated Load Current A	Rated Load Torque kgfcm	Rated Load Torque N.m	Capacitor μF / VAC
9BD◇3(G)-200F□	200	3ø 220	50	4	Cont.	36.10	3.610	1300	1.27	14.98	1.498	–
			60			30.10	3.010	1550	1.17	12.57	1.257	
		3ø 230	50	4	Cont.	39.70	3.970	1300	1.33	14.98	1.498	
			60			32.60	3.260	1550	1.21	12.57	1.257	
9BD◇4(K)-200F□	200	3ø 380	50	4	Cont.	39.70	3.970	1300	0.74	14.98	1.498	–
			60			31.10	3.110	1550	0.67	12.57	1.257	
		3ø 400	50	4	Cont.	41.20	4.120	1300	0.81	14.98	1.498	
			60			35.10	3.510	1550	0.70	12.57	1.257	
9BD◇5(L)-200F□	200	3ø 415	50	4	Cont.	38.40	3.840	1300	0.70	14.98	1.498	–
			60			31.10	3.110	1550	0.62	12.57	1.257	
		3ø 440	50	4	Cont.	42.00	4.200	1300	0.76	14.98	1.498	
			60			34.60	3.460	1550	0.66	12.57	1.257	

1) Enter the phase & voltage code in the place * within the motor model name.
2) Enter the output shaft type of motor in the place ◇ (G: Gear Type / D: D-Cut Type / K: Key Type) and D-Cut Type / Key Type Shaft are for using the motor only.
3) If the motor output shaft type is Gear Type, □ contains the model type name of the gearbox being attached.
4) The phase & voltage code G, K, L, contain a built-in thermal protector. 5) It is not possible to use an inverter for three phase 380~440V motor. When the inverter is used, the insulation of winding coil becomes hot and may cause damage to the motor.

Max. Permissible Torque at Output Shaft of Gearbox

60Hz

Motor Model	Gearbox Model	Gear Ratio	3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120	150	180	200
		r/min	600	500	360	300	240	200	180	144	120	100	90	72	60	50	45	36	30	24	20	18	15	12	10	9
9BDG*-200FH	9HBK□BH	kgfcm	30.5	36.6	50.9	61.1	76.3	91.6	101.8	114.7	137.6	165.1	183.5	207.4	248.8	298.6	300.0	300.0	300.0	300.0	300.0	300.0	300.0	300.0	300.0	300.0
	9HFK□BH	N.m	2.99	3.59	4.99	5.99	7.48	8.98	9.98	11.24	13.49	16.18	17.98	20.32	24.39	29.26	29.40	29.40	29.40	29.40	29.40	29.40	29.40	29.40	29.40	29.40

Motor Model	Gearbox Model	Gear Ratio	5	7.5	10	15	20	25	30	40	50	60	80	100
		r/min	360	240	180	120	90	72	60	45	36	30	22	18
9BDG*-200FWH	9WHD□-030	kgfcm	43.7	63.3	81.4	114.6	144.8	165.9	193.0	183.7	173.5	163.3	132.7	–
		N.m	4.29	6.21	7.98	11.23	14.19	16.26	18.92	18.00	17.00	16.00	13.00	–
	9WHD□-040	kgfcm	–	–	–	–	–	–	–	–	306.7	330.0	295.0	270.0
		N.m	–	–	–	–	–	–	–	–	30.05	32.34	28.91	26.46

Motor Model	Gearbox Model	Gear Ratio	15	20	25	30	40	50	60	80	100	120	160	200	225	240
		r/min	120	90	72	60	45	36	30	22.5	18	15	11.3	9	8	7.5
9BDG*-200FHC	9HC□-◇	kgfcm	137.6	183.5	229.4	275.2	367.0	458.7	550.5	734.0	917.4	1100.9	1467.9	1800.0	1800.0	1800.0
		N.m	13.49	17.98	22.48	26.97	35.96	44.95	53.95	71.93	89.91	107.89	143.86	176.40	176.40	176.40

50Hz

Motor Model	Gearbox Model	Gear Ratio	3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120	150	180	200
		r/min	500	417	300	250	200	167	150	120	100	83	75	60	50	42	37.5	30	25	20	17	15	12.5	10	8	7.5
9BDG*-200FH	9HBK□BH	kgfcm	36.4	43.7	60.7	72.8	91.0	109.2	121.4	136.7	164.1	196.9	218.8	247.2	296.7	300.0	300.0	300.0	300.0	300.0	300.0	300.0	300.0	300.0	300.0	300.0
	9HFK□BH	N.m	3.57	4.28	5.95	7.14	8.92	10.71	11.89	13.40	16.08	19.30	21.44	24.23	29.08	29.40	29.40	29.40	29.40	29.40	29.40	29.40	29.40	29.40	29.40	29.40

Motor Model	Gearbox Model	Gear Ratio	5	7.5	10	15	20	25	30	40	50	60	80	100
		r/min	300	200	150	100	75	60	50	38	30	25	18	15
9BDG*-200FWH	9WHD□-030	kgfcm	52.1	75.5	97.1	136.7	172.6	183.7	204.1	183.7	173.5	163.3	132.7	–
		N.m	5.11	7.40	9.52	13.39	16.92	18.00	20.00	18.00	17.00	16.00	13.00	–
	9WHD□-040	kgfcm	–	–	–	–	–	–	–	–	350.0	330.0	295.0	270.0
		N.m	–	–	–	–	–	–	–	–	34.30	32.34	28.91	26.46

Motor Model	Gearbox Model	Gear Ratio	15	20	25	30	40	50	60	80	100	120	160	200	225	240
		r/min	100	75	60	50	37.5	30	25	18.8	15	12.5	9.4	7.5	6.7	6.3
9BDG*-200FHC	9HC□-◇	kgfcm	164.1	218.8	273.5	328.2	437.6	546.9	656.3	875.1	1093.9	1312.7	1750.2	1800.0	1800.0	1800.0
		N.m	16.08	21.44	26.80	32.16	42.88	53.60	64.32	85.76	107.20	128.64	171.52	176.40	176.40	176.40

1) Enter the phase & voltage code in the place * within the motor model name. 2) Enter the gear ratio in the place of □ and enter the output shaft material in the place of ◇ within the gearbox model name. 3) A colored background indicates the gear shaft rotation in the same direction as the motor shaft; a white background indicates the rotation in the opposite direction. 4) The rotating speed is calculated by dividing the motor's synchronous speed (50Hz: 1,500r/min, 60Hz: 1,800r/min) by the gear ratio. The actual speed is 2~20% less than the displayed value, depending on the size of the load.

B AC Motors

Brake Motor 200W (□90mm)

Dimensions

MOTOR ONLY

● MOTOR MODEL:
9BD□□-200F (GENERAL FAN)

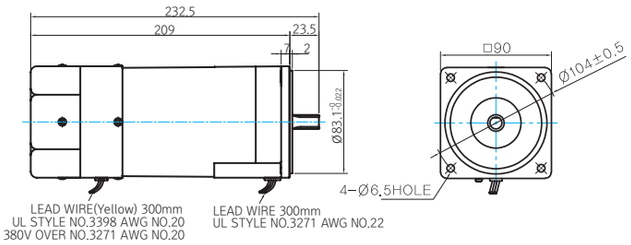

● MOTOR OUTPUT SHAFT

MODEL	SPEC
D-CUT TYPE	
9BDD□-200F	
KEY TYPE	
9BDK□-200F	

● KEY SPEC

MOTOR



GEARED MOTOR

H TYPE GEARBOX

● MOTOR MODEL:
9BDG□-200FH (GENERAL FAN)

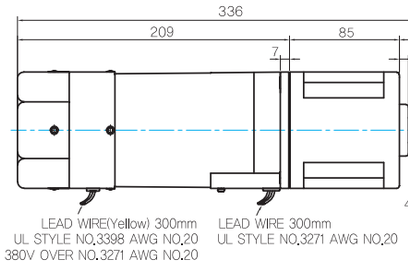

● GEARBOX MODEL:
9HBK□BH



● GEARBOX MODEL:
9HFK□BH

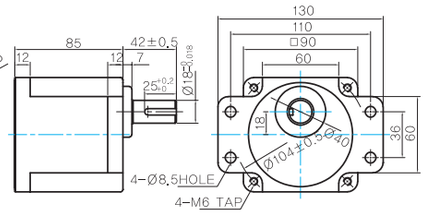

● GEARBOX OUTPUT SHAFT

MODEL	SPEC
KEY TYPE	
9HBK□BH 9HFK□BH	

● KEY SPEC

GEARBOX



WH TYPE GEARBOX

● MOTOR MODEL:
9BDG□-200FWH (GENERAL FAN)

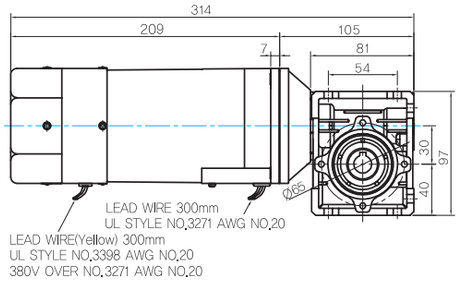

● GEARBOX MODEL:
9WHD□-030



● SHAFT

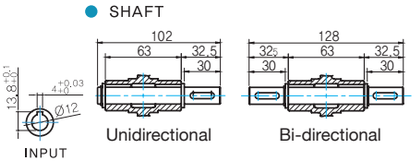

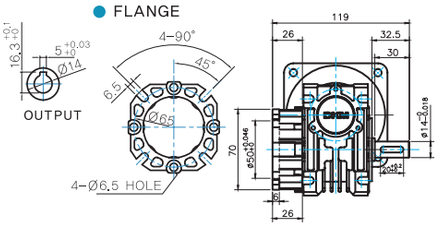

● FLANGE

● KEY SPEC

GEARBOX



*The output flange and shaft are sold separately.

● MOTOR MODEL:
9BDG□-200FWH (GENERAL FAN)

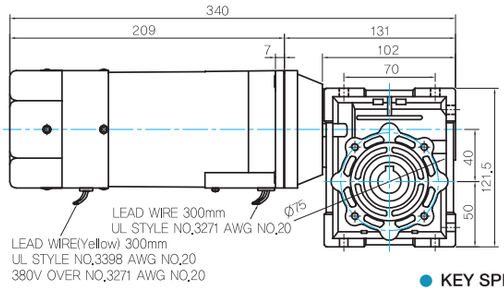

● GEARBOX MODEL:
9WHD□-040



● SHAFT



● FLANGE

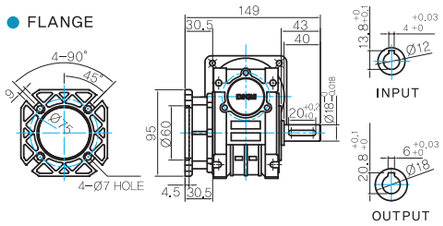

● KEY SPEC

GEARBOX



HC TYPE GEARBOX

● MOTOR MODEL :
9BDG□-200FHC (GENERAL FAN)

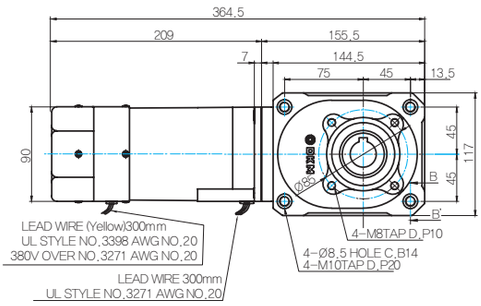

● GEARBOX MODEL:
9HC(15 ~ 60)□



● SHAFT

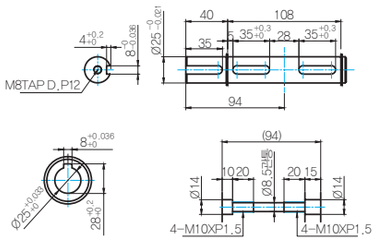

● MOTOR MODEL :
9BDG□-200FHC (GENERAL FAN)

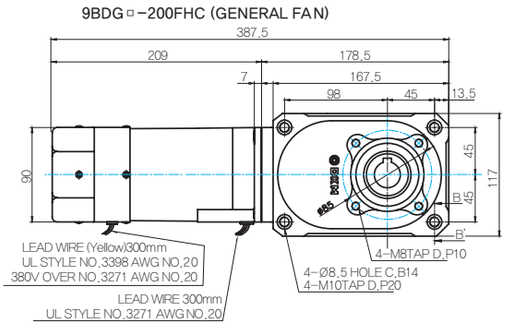

● GEARBOX MODEL :
9HC(80 ~ 240)□



● KEY SPEC

GEARBOX



WEIGHT

PART		WEIGHT(kg)
MOTOR		4.40
GEAR BOX	9HB(F)K3BH - 9HB(F)K10BH	1.62
	9HB(F)K12.5BH - 9HB(F)K20BH	1.68
	9HB(F)K25BH - 9HB(F)K60BH	1.73
	9HB(F)K75BH - 9HB(F)K200BH	1.78
	9WHD□-030	1.20
	9WHD□-040	2.10
	9HC15-◇	4.05
	9HC20-◇ - 9HC60-◇	4.10
	9HC80-◇ - 9HC240-◇	4.75
	9XD10○○	0.60

*The output flange and shaft are sold separately.

Motor Images

9BDD□-200F	9BDG□-200FH+9HBK□BH	9BDG□-200FH+9HFK□BH	9BDG□-200FWH+9WHD□	9BDG□-200FHC+9HC□□

Connection Diagrams

Three Phase

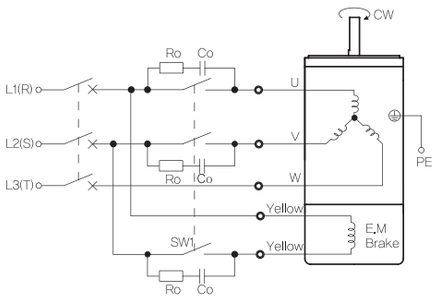

1) The direction of motor rotation is as viewed from the shaft end of the motor.
2) CW represents the clockwise direction, while CCW represents the counterclockwise direction.
3) SW1 operates both motor and electromagnetic brake action.
4) The electromagnetic brake will be released and the motor will rotate when SW1 is switched simultaneously to ON. When SW1 is switched simultaneously to OFF, the motor stops immediately with the electromagnetic brake and holds the load.
5) If you wish to release the brake while the motor is stopped, apply voltage between the two brake lead wires (yellow).
6) Ro and Co indicate CR circuit for surge suppression. [Ro=5~200Ω, Co=0.1~0.2μF, 200WV (400WV)]

*** CCW Direction:**
Change any two connections between R, S and T.

Switch No.	Specifications	Note
SW1	AC 250V 1.5A minimum (Inductive load)	Switched Simultaneously

INPUT \ LEAD WIRE	U	V	W
3Φ 200V-230V (3, G, J)	WHITE	RED	BLACK
3Φ 380V-400V (4, K)	WHITE	BLUE	BLACK
3Φ 415V-440V (5, L)	WHITE	YELLOW	BLACK

250W Brake Motor 250W(□104mm)

Motor Specification

Model 10BDGE-250F□-T: Gear Type Shaft 10BDDE-250F-T: D-Cut Type Shaft 10BDKE-250F-T: Key Type Shaft Terminal Box Type	Output W	Voltage V	Frequency Hz	Poles	Duty	Starting Torque kgfcm	Starting Torque N.m	Rated Load Speed r/min	Rated Load Current A	Rated Load Torque kgfcm	Rated Load Torque N.m	Capacitor μF / VAC
10BD◇E-250F□-T	250	1ø220	50	4	30min.	11.00	1.100	1250	2.29	19.48	1.948	13.0 / 450
		1ø240				13.50	1.350	1300	2.17	18.74	1.874	

1) Enter the output shaft type of motor in the place ◇ (G: Gear Type / D: D-Cut Type / K: Key Type) and D-Cut Type / Key Type Shaft are for using the motor only.
2) If the motor output shaft type is Gear Type, □ contains the model type name of the gearbox being attached.
3) The phase & voltage code E contains a built-in thermal protector.

Max. Permissible Torque at Output Shaft of Gearbox

50Hz

Motor Model	Gearbox Model	Gear Ratio	3	5	9	10	15	20	25	30	40	50	60	90	100	120	150	180
		r/min	500	300	167	150	100	75	60	50	37.5	30	25	16.7	15	12.5	10	8.3
10BDGE-250FU-T	10UBK□BH	kgfcm	50.0	80.0	145.0	150.0	220.0	270.0	335.0	400.0	400.0	400.0	400.0	400.0	400.0	400.0	400.0	400.0
		N.m	4.90	7.84	14.21	14.70	21.56	26.46	32.83	39.20	39.20	39.20	39.20	39.20	39.20	39.20	39.20	39.20

Motor Model	Gearbox Model	Gear Ratio	5	7.5	10	15	20	25	30	40
		r/min	300	200	150	100	75	60	50	38
10BDKE-250F-T	10WHD□-040	kgfcm	70.0	100.0	130.0	185.0	240.0	290.0	325.0	305.0
		N.m	6.86	9.80	12.74	18.13	23.52	28.42	31.85	29.89

Motor Model	Gearbox Model	Gear Ratio	15	20	25	30	40	50	60	80	100	120	160	200	225	240
		r/min	100	75	60	50	37.5	30	25	18.8	15	12.5	9.4	7.5	6.7	6.3
10BDGE-250FHC-T	10HC□-◇	kgfcm	213.3	284.4	355.5	426.6	568.8	711.0	853.2	1137.6	1422.0	1706.4	2275.3	2844.1	3000.0	3000.0
		N.m	20.90	27.87	34.84	41.81	55.74	69.68	83.62	111.49	139.36	167.23	222.98	278.72	294.00	294.00

1) Enter the gear ratio in the place of □ and enter the output shaft material in the place of ◇ within the gearbox model name.
2) A colored background indicates the gear shaft rotation in the same direction as the motor shaft; a white background indicates the rotation in the opposite direction.
3) The rotating speed is calculated by dividing the motor's synchronous speed (50Hz: 1,500r/min, 60Hz: 1,800r/min) by the gear ratio.
The actual speed is 2~20% less than the displayed value, depending on the size of the load.

Dimensions

MOTOR ONLY

● MOTOR MODEL:
10BD□□-250F-T

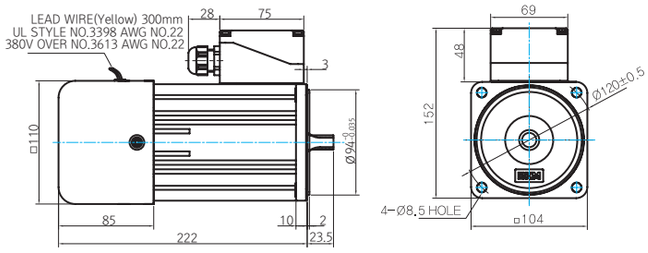

● MOTOR OUTPUT SHAFT



● KEY SPEC



GEARED MOTOR

U TYPE GEARBOX

● MOTOR MODEL:
10BDG□-250FU-T

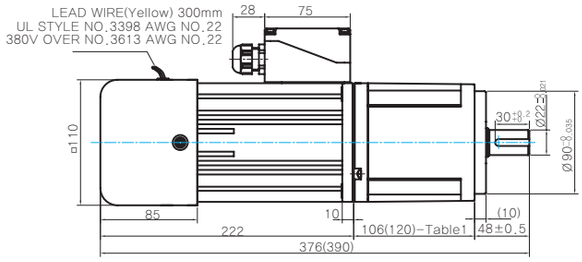

● GEARBOX MODEL:
10UBK□BH



● GEARBOX OUTPUT SHAFT

MODEL	SPEC
KEY TYPE	
10UBK□BH	

● KEY SPEC

GEARBOX



● 106(120)-Table1

SIZE(mm)	GEAR RATIO
106	10UBK3BH - 10UBK60BH
120	10UBK90BH - 10UBK180BH

WH TYPE GEARBOX

● MOTOR MODEL:
10BDK□-250F-T

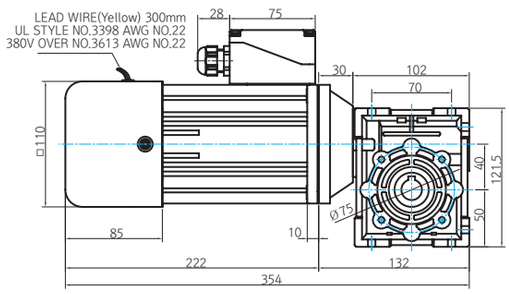

● GEARBOX MODEL:
10WHD□-040



● SHAFT



● FLANGE

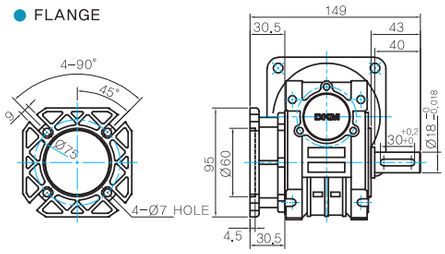

● KEY SPEC

GEARBOX



HC TYPE GEARBOX

● GEARBOX MODEL :
10BDGE-250FHC-T (GENERAL FAN)

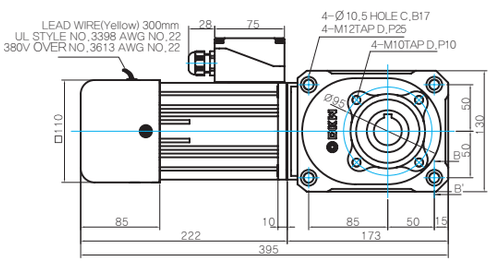

● GEARBOX MODEL :
10HC(15 ~ 60)□



● SHAFT

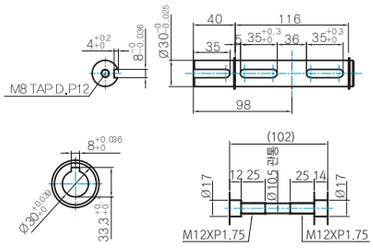

B AC Motors

Brake Motor 250W (□104mm)

● GEARBOX MODEL :
10BDGE-250FHC-T (GENERAL FAN)

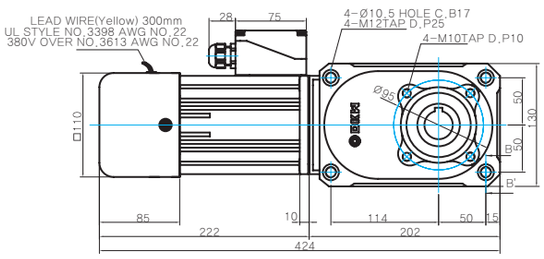

● GEARBOX MODEL :
10HC(80 ~ 240)□



● KEY SPEC

GEARBOX



WEIGHT

PART		WEIGHT(kg)
MOTOR		7.10
GEAR BOX	10UBK3BH - 10UBK9BH	2.00
	10UBK10BH - 10UBK15BH	2.15
	10UBK20BH - 10UBK60BH	2.30
	10UBK90BH - 10UBK180BH	2.50
	10WHD□-040	2.20
	10HC15-◇	5.50
	10HC20-◇ - 10HC60-◇	5.60
	10HC80-◇ - 10HC240-◇	6.40

*The output flange and shaft are sold separately.

Motor Images

10BDKE-250F-T	10BDGE-250FU-T + 10UBK□BH	10BDKE-250F-T + 10WHD□-040	10BDG□-250FHC-T+10HC□□

Connection Diagrams

Terminal Box

Single Phase 220~240V
Three Phase 220V, 230V, 440V



Three Phase 380V, 400V



Brake Motor

Single Phase



Three Phase 220~230V



Three Phase 380~440V



1) The direction of motor rotation is as viewed from the shaft end of the motor.
2) CW represents the clockwise direction, while CCW represents the counterclockwise direction.
3) The supply voltage for brakes is 220V.

300W

Brake Motor
300W(□104mm)

Motor Specification

Model 10BDG*-300F□-T: Gear Type Shaft 10BDD*-300F-T: D-Cut Type Shaft 10BDK*-300F-T: Key Type Shaft Terminal Box Type	Output W	Voltage V	Frequency Hz	Poles	Duty	Starting Torque kgfcm	Starting Torque N.m	Rated Load Speed r/min	Rated Load Current A	Rated Load Torque kgfcm	Rated Load Torque N.m	Capacitor μF / VAC
10BD◇D-300F□-T	300	1Ø 220	60	4	30min.	13.60	1.360	1600	2.52	18.27	1.827	15.0 / 450
10BD◇7-300F□-T	300	3Ø 230	50	4	30min.	47.00	4.793	1300	1.70	22.48	2.248	–
		3Ø 400				47.00	4.793	1300	1.01	22.48	2.248	
10BD◇8-300F□-T	300	3Ø 440	50	4	30min.	47.00	4.793	1300	0.88	22.48	2.248	–
			60			35.00	3.500	1550	0.88	18.86	1.886	

1) Enter the phase & voltage code in the place * within the motor model name.
2) Enter the output shaft type of motor in the place ◇ (G: Gear Type / D: D-Cut Type / K: Key Type) and D-Cut Type / Key Type Shaft are for using the motor only.
3) If the motor output shaft type is Gear Type, □ contains the model type name of the gearbox being attached.
4) The phase & voltage code D contains a built-in thermal protector.
5) It is not possible to use an inverter for three phase 380~440V motor. When the inverter is used, the insulation of winding coil becomes hot and may cause damage to the motor.

Max. Permissible Torque at Output Shaft of Gearbox

60Hz

Motor Model	Gearbox Model	Gear Ratio	3	5	9	10	15	20	25	30	40	50	60	90	100	120	150	180
		r/min	600	360	200	180	120	90	72	60	45	36	30	20	18	15	12	10
10BDG*-300FU-T	10UBK□BH	kgfcm	45.0	75.0	135.0	140.0	205.0	250.0	300.0	300.0	350.0	350.0	400.0	400.0	400.0	400.0	400.0	400.0
		N.m	4.41	7.35	13.23	13.72	20.09	24.50	29.40	29.40	34.30	34.30	39.20	39.20	39.20	39.20	39.20	39.20

Motor Model	Gearbox Model	Gear Ratio	5	7.5	10	15	20	25	30	40
		r/min	360	240	180	120	90	72	60	45
10BDK*-300F-T	10WHD□-040	kgfcm	65.0	95.0	125.0	175.0	225.0	270.0	300.0	285.0
		N.m	6.37	9.31	12.25	17.15	22.05	26.46	29.40	27.93

Motor Model	Gearbox Model	Gear Ratio	15	20	25	30	40	50	60	80	100	120	160	200	225	240
		r/min	120	90	72	60	45	36	30	22.5	18	15	11.3	9	8	7.5
10BDG*-300FHC-T	10HC□-◇	kgfcm	200.0	266.6	333.3	399.9	533.3	666.6	799.9	1066.5	1333.2	1599.8	2133.1	2666.3	2999.6	3000.0
		N.m	19.60	26.13	32.66	39.19	52.26	65.32	78.39	104.52	130.65	156.78	209.04	261.30	293.96	294.00

50Hz

Motor Model	Gearbox Model	Gear Ratio	3	5	9	10	15	20	25	30	40	50	60	90	100	120	150	180
		r/min	500	300	167	150	100	75	60	50	37.5	30	25	16.7	15	12.5	10	8.3
10BDG*-300FU-T	10UBK□BH	kgfcm	55.0	95.0	170.0	170.0	250.0	300.0	300.0	300.0	350.0	350.0	400.0	400.0	400.0	400.0	400.0	400.0
		N.m	5.39	9.31	16.66	16.66	24.50	29.40	29.40	29.40	34.30	34.30	39.20	39.20	39.20	39.20	39.20	39.20

Motor Model	Gearbox Model	Gear Ratio	5	7.5	10	15	20	25	30	40
		r/min	300	200	150	100	75	60	50	37.5
10BDK*-300F-T	10WHD□-040	kgfcm	80.0	115.0	150.0	215.0	275.0	335.0	375.0	350.0
		N.m	7.84	11.27	14.70	21.07	26.95	32.83	36.75	34.30

Motor Model	Gearbox Model	Gear Ratio	15	20	25	30	40	50	60	80	100	120	160	200	225	240
		r/min	100	75	60	50	37.5	30	25	18.8	15	12.5	9.4	7.5	6.7	6.3
10BDG*-300FHC-T	10HC□-◇	kgfcm	246.1	328.2	410.2	492.2	656.3	820.4	984.5	1312.7	1640.8	1969.0	2625.3	3000.0	3000.0	3000.0
		N.m	24.12	32.16	40.20	48.24	64.32	80.40	96.48	128.64	160.80	192.96	257.28	294.00	294.00	294.00

1) Enter the phase & voltage code in the place * within the motor model name.
2) Enter the gear ratio in the place of □ and enter the output shaft material in the place of ◇ within the gearbox model name.
3) A colored background indicates the gear shaft rotation in the same direction as the motor shaft
; a white background indicates the rotation in the opposite direction.
4) The rotating speed is calculated by dividing the motor's synchronous speed (50Hz: 1,500r/min, 60Hz: 1,800r/min) by the gear ratio.
The actual speed is 2~20% less than the displayed value, depending on the size of the load.

B AC Motors

Brake Motor 300W (□104mm)

Dimensions

MOTOR ONLY

● MOTOR MODEL:
10BD□□-300F-T

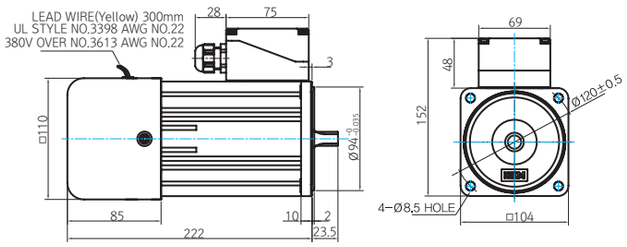

● MOTOR OUTPUT SHAFT

MODEL	SPEC
D-CUT TYPE	
10BDD□-300F	
KEY TYPE	
10BDK□-300F	

● KEY SPEC

MOTOR



GEARED MOTOR

U TYPE GEARBOX

● MOTOR MODEL:
10BDG□-300FU-T

● GEARBOX MODEL:
10UBK□BH

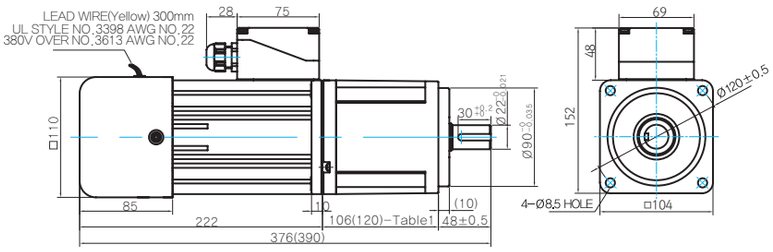

● GEARBOX OUTPUT SHAFT

MODEL	SPEC
KEY TYPE	
10UBK□BH	

● KEY SPEC

GEARBOX



● 106(120)-Table1

SIZE(mm)	GEAR RATIO
106	10UBK3BH - 10UBK60BH
120	10UBK90BH - 10UBK180BH

WH TYPE GEARBOX

● MOTOR MODEL:
10BDK□-250F-T

● GEARBOX MODEL:
10WHD□-040

● SHAFT

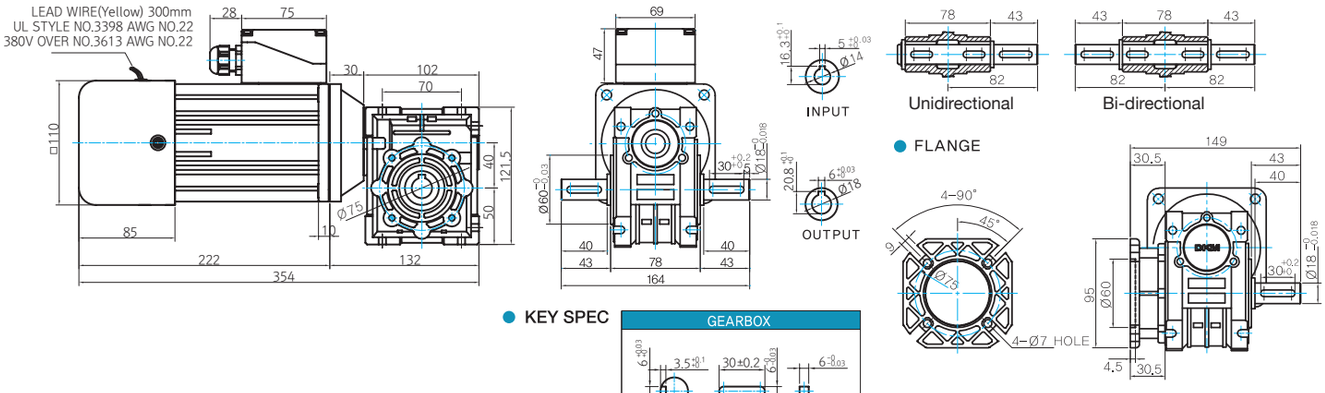

● FLANGE

● KEY SPEC

GEARBOX



HC TYPE GEARBOX

● GEARBOX MODEL :
10BDG□-300FHC-T (GENERAL FAN)

● GEARBOX MODEL :
10HC(15 ~ 60)□

● SHAFT

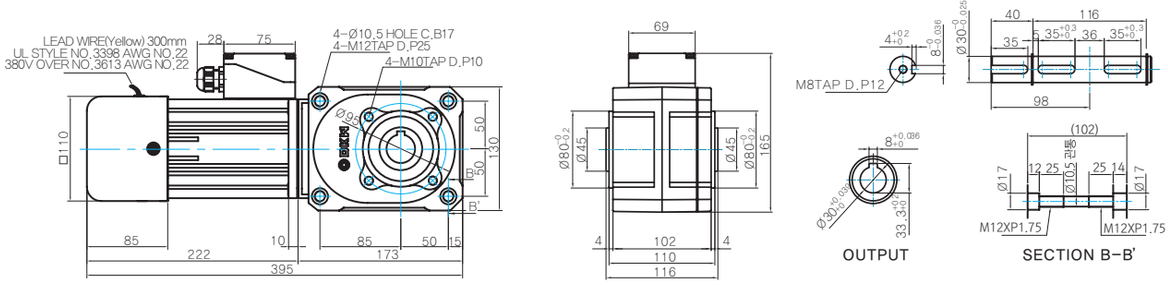

● GEARBOX MODEL :
10BDG□-300FHC-T (GENERAL FAN)

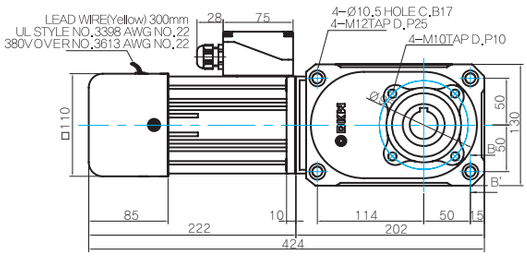

● GEARBOX MODEL :
10HC(80 ~ 240)□



● KEY SPEC

GEARBOX



WEIGHT

PART		WEIGHT(kg)
MOTOR		7.10
GEAR BOX	10UBK3BH - 10UBK9BH	2.00
	10UBK10BH - 10UBK15BH	2.15
	10UBK20BH - 10UBK60BH	2.30
	10UBK90BH - 10UBK180BH	2.50
	10WHD□-040	2.20
	10HC15-◇	5.50
	10HC20-◇ - 10HC60-◇	5.60
	10HC80-◇ - 10HC240-◇	6.40

* The output flange and shaft are sold separately

Motor Images

10BDK□-300F-T	10BDG□-300FU-T + 10UBK□BH	10BDK□-300F-T + 10WHD□-040	10BDG□-300FHC-T+10HC□□

Connection Diagrams

Terminal Box

Single Phase 220~240V
Three Phase 220V, 230V, 440V



Three Phase 380V, 400V



Brake Motor

Single Phase



Three Phase220~230V



Three Phase 380~440V

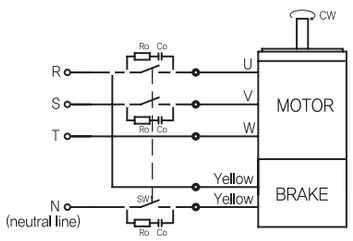

1) The direction of motor rotation is as viewed from the shaft end of the motor.
2) CW represents the clockwise direction, while CCW represents the counterclockwise direction.
3) The supply voltage for brakes is 220V.

400W Brake Motor 400W(□104mm)

Motor Specification

Model 10BDG6-400F□-T: Gear Type Shaft 10BDD6-400F-T: D-Cut Type Shaft 10BDK6-400F-T: Key Type Shaft Terminal Box Type	Output W	Voltage V	Frequency Hz	Poles	Duty	Starting Torque kgfcm	Starting Torque N.m	Rated Load Speed r/min	Rated Load Current A	Rated Load Torque kgfcm	Rated Load Torque N.m	Capacitor μF / VAC
10BD◇6-400F□-T	400	3Ø 220	60	4	30min.	47.00	4.793	1600	2.10	24.35	2.435	–
		3Ø 380				47.00	4.793	1600	1.21	24.35	2.435	

1) Enter the output shaft type of motor in the place ◇ (G: Gear Type / D: D-Cut Type / K: Key Type) and D-Cut Type / Key Type Shaft are for using the motor only.
2) If the motor output shaft type is Gear Type, □ contains the model type name of the gearbox being attached.
3) It is not possible to use an inverter for three phase 380~440V motor. When the inverter is used, the insulation of winding coil becomes hot and may cause damage to the motor.

Max. Permissible Torque at Output Shaft of Gearbox

60Hz

Motor Model	Gearbox Model	Gear Ratio	3	5	9	10	15	20	25	30	40	50	60	90	100	120	150	180
		r/min	600	360	200	180	120	90	72	60	45	36	30	20	18	15	12	10
10BDG6-400FU-T	10UBK□BH	kgfcm	60.0	100.0	180.0	185.0	275.0	300.0	300.0	300.0	350.0	350.0	400.0	400.0	400.0	400.0	400.0	400.0
		N.m	5.88	9.80	17.64	18.13	26.95	29.40	29.40	29.40	34.30	34.30	39.20	39.20	39.20	39.20	39.20	39.20

Motor Model	Gearbox Model	Gear Ratio	5	7.5	10	15	20	25	30	40
		r/min	360	240	180	120	90	72	60	45
10BDK6-400F-T	10WHD□-040	kgfcm	85.0	125.0	160.0	230.0	295.0	355.0	395.0	375.0
		N.m	8.33	12.25	15.68	22.54	28.91	34.79	38.71	36.75

Motor Model	Gearbox Model	Gear Ratio	15	20	25	30	40	50	60	80	100	120	160	200	225	240
		r/min	120	90	72	60	45	36	30	22.5	18	15	11.3	9	8	7.5
10IDG6-400FHC-T	10HC□-◇	kgfcm	266.6	355.5	444.4	533.3	711.0	888.8	1066.5	1422.0	1777.6	2133.1	2844.1	3000.0	3000.0	3000.0
		N.m	26.13	34.84	43.55	52.26	69.68	87.10	104.52	139.36	174.20	209.04	278.72	294.00	294.00	294.00

1) Enter the gear ratio in the place of □ and enter the output shaft material in the place of ◇ within the gearbox model name.
2) A colored background indicates the gear shaft rotation in the same direction as the motor shaft
: a white background indicates the rotation in the opposite direction.
3) The rotating speed is calculated by dividing the motor's synchronous speed (50Hz: 1,500r/min, 60Hz: 1,800r/min) by the gear ratio.
The actual speed is 2~20% less than the displayed value, depending on the size of the load.

Dimensions

MOTOR ONLY

● MOTOR MODEL:
10BD□□-400F-T

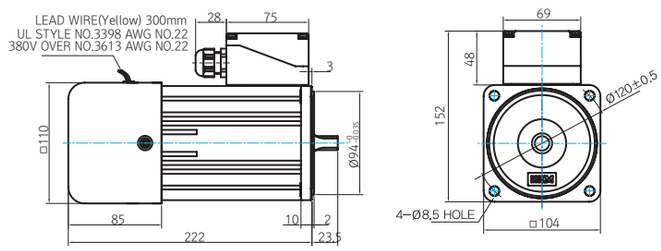

● MOTOR OUTPUT SHAFT

MODEL	SPEC
D-CUT TYPE	
10BDD□-400F	
KEY TYPE	
10BDK□-400F	

● KEY SPEC



GEARED MOTOR

U TYPE GEARBOX

● MOTOR MODEL:
10BDG□-400FU-T

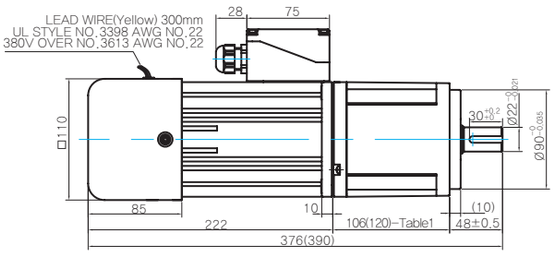

● GEARBOX MODEL:
10UBK□BH



● GEARBOX OUTPUT SHAFT

MODEL	SPEC
KEY TYPE	
10UBK□BH	

● KEY SPEC



● 106(120)-Table1

SIZE(mm)	GEAR RATIO
106	10UBK3BH – 10UBK60BH
120	10UBK90BH – 10UBK180BH

WH TYPE GEARBOX

● MOTOR MODEL:
10BDK□-250F-T

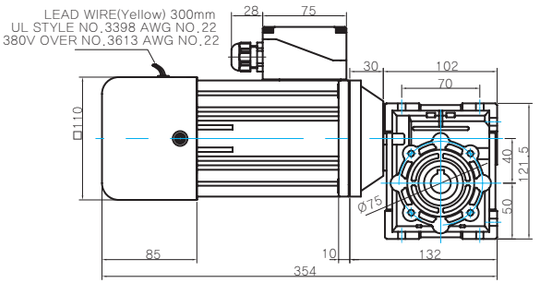

● GEARBOX MODEL:
10WHD□-040



● SHAFT(Unidirectional, Bi-directional)

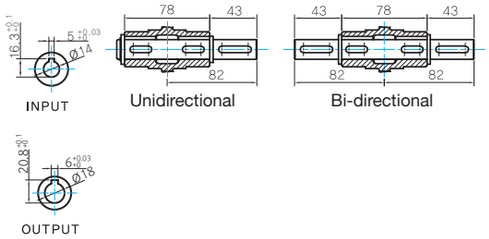

● FLANGE

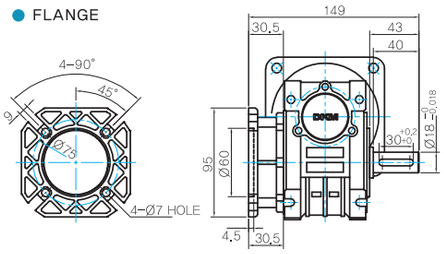

● KEY SPEC





HC TYPE GEARBOX

● GEARBOX MODEL :
10BDG6-400FHC-T (GENERAL FAN)

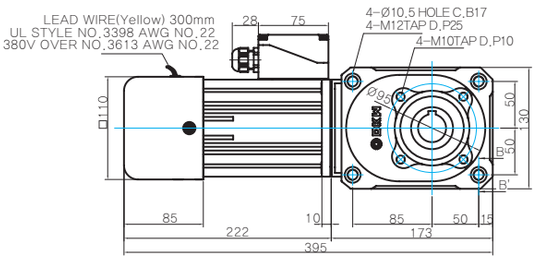

● GEARBOX MODEL :
10HC(15 ~ 60)□



● SHAFT

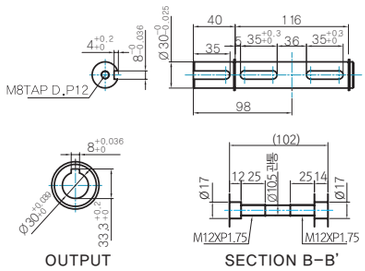

B AC Motors

Brake Motor 400W (□104mm)

● GEARBOX MODEL :
10BDG6-400FHC-T (GENERAL FAN)

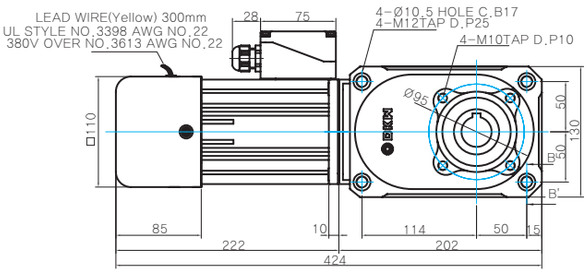

● GEARBOX MODEL :
10HC(80~240)□



● KEY SPEC

GEARBOX



WEIGHT

PART		WEIGHT(kg)
MOTOR		7.10
GEAR BOX	10UBK3BH - 10UBK9BH	2.00
	10UBK10BH - 10UBK15BH	2.15
	10UBK20BH - 10UBK60BH	2.30
	10UBK90BH - 10UBK180BH	2.50
	10WHD□-040	2.20
	10HC15-◇	5.50
	10HC20-◇ - 10HC60-◇	5.60
	10HC80-◇ - 10HC240-◇	6.40

*The output flange and shaft are sold separately.

Motor Images

10BDK6-400F-T	10BDG6-400FU-T + 10UBK□BH	10BDK6-400F-T + 10WHD□-040	10BDG6-400FHC-T+10HC□□

Connection Diagrams

Terminal Box

Single Phase 220~240V
Three Phase 220V, 230V, 440V



Three Phase 380V, 400V



Brake Motor

Single Phase



Three Phase 220~230V



Three Phase 380~440V



1) The direction of motor rotation is as viewed from the shaft end of the motor.
2) CW represents the clockwise direction, while CCW represents the counterclockwise direction.
3) The supply voltage for brakes is 220V.

Ott Antriebstechnik
Standardisierte Individualität

Wir kombinieren Elektronik und Mechanik für Sie. Und das seit über 70 Jahren.

Die Ott GmbH & Co. KG bietet als Produktions-, Handels- und Dienstleistungsunternehmen Komponenten und Systeme aus dem Bereich der Antriebstechnik und Elektronik an. Wir sehen uns als Produzent, Modifikator und Händler von Antrieben und Steuerungen und sind als verlässlicher Business-Partner bekannt. Aufgrund der hohen Qualität und Langlebigkeit unserer Produkte, genießen wir einen hervorragenden Ruf in der Industrie.

Als Vertretung unter anderem der Firmen Nidec, DKM, Transtecno, Ewellix und Kaleja führen wir ein Lager, in dem ständig circa 100.000 Motoren und Steuerungen vorrätig gehalten werden. Dies ermöglicht es, schnell auf Ihre Anforderungen zu reagieren. Darüber hinaus werden in unserer eigenen Fertigung kundenspezifische Änderungen an Motoren, wie Wellenbearbeitungen, Aufbau von Inkrementalgebern, Bremsen, Sonder-getriebe und Steckverbindungen, realisiert.

Diese Sonderfertigungen führen wir auch bei kleinsten Stückzahlen durch.

Damit können komplette Systemlösungen nach Ihren Aufgabenstellungen projektiert und gefertigt werden. Um die optimale Lösung für jedes Projekt zu erarbeiten, stehen unsere erfahrenen und langjährigen Vertriebsingenieure mit kompetentem Fachwissen jederzeit zur Verfügung.

Unser Vorgehen: Wir informieren uns über Ihre Anforderungen, wählen mit Ihrer Entwicklungsabteilung die passenden Antriebe und Steuerungen aus und erarbeiten wirtschaftliche Systemlösungen.

Gemäß dem Slogan „Standardisierte Individualität" wird wo möglich eine Standard- und wo nötig eine individuelle Lösung erarbeitet.

Kataloge entdecken

Ott GmbH & Co. KG
Baarstraße 3 • D-78652 Deißlingen
Telefon: +49 7420 / 9399-0

info@ott-antriebe.de
www.ott-antriebe.de